

# **Swordfish Scalable Storage Management API Specification**

Version: 1.2.7

**Abstract:** The Swordfish Scalable Storage Management API defines a RESTful interface and a standardized data model to provide a scalable, customer-centric interface for managing storage and related data services.

# **Working Draft**

Publication of this Working Draft for review and comment has been approved by the Scalable Storage Management Technical Work Group. This draft represents a 'best effort' attempt by the Scalable Storage Management Technical Work Group to reach preliminary consensus, and it may be updated, replaced, or made obsolete at any time. This document should not be used as reference material or cited as other than a 'work in progress.' Suggestions for revision should be directed to http://www.snia.org/feedback.

Last Updated: 21 May 2024

# **Contents**

	USA	GE	12
		DISCLAIMER	13
		Current Revision	13
		Contact SNIA	13
		FEEDBACK AND INTERPRETATIONS	4
		INTENDED AUDIENCE	4
		VERSIONING POLICY	4
		Revision History	15
	Abo	ut SNIA	22
	Ackr	nowledgements	22
1	Abst	tract 2	24
2	Sco	pe 2	25
3	Nor	mative References 2	27
	3.1	Overview	27
	3.2	Approved references	27
	3.3	References under development	9
	3.4	Other references	9
4	Terr	ns and Definitions 3	0
	4.1	Overview	0
	4.2	Swordfish-specific Terms	0
		4.2.1 Definitions	0
		4.2.2 Symbols and abbreviated terms	0
	4.3	Reference to Redfish terms	0
	4.4	Keywords (normative language terms)	31
5	Swo	ordfish Overview 3	3
	5.1	Introduction	3
	5.2	Relation to Redfish	3
	5.3	Storage System Models	4
	5.4	Swordfish model overview	8
		5.4.1 The StorageSystems resources collection	39
		5.4.2 The Storage resource	0
		5.4.3 The ConsistencyGroup resource 4	12
		5.4.4 The ConsistencyGroup Collection resource 4	ŀ3

Swordfich	Scalable	Ctorago	Management	VDI C	nacification
Sworunsn	Scalable	Storage	management	APIS	pecilication

	_	_	_
Version	1	٠,	- /
V C1 31011		•	

		5.4.5	The StorageGroup resource	43
		5.4.6	The StoragePool resource	43
		5.4.7	The FileSystem resource	46
_			- I Double	4.0
6			nd Profiles	48
	6.1	Overvi		48
	6.2		rement for SupportedFeatures	48
	6.3		yStar for Storage Feature	49
	6.4		and NVMe-oF Features	49
	6.5		of Service Feature	49
		6.5.1	Overview	49
		6.5.2	Class of Service Model	50
		6.5.3	ServiceRoot Additions	54
		6.5.4	The StorageService resource	54
7	Sche	ema Co	nsiderations	58
	7.1	Schen	na Introduction	58
		7.1.1	Overview	58
		7.1.2	Schema Primacy	58
		7.1.3	Swordfish Extension of the Redfish ServiceRoot	58
	7.2	Defaul	lt values and NULLABLE attributes	59
	7.3	Comm	non schema annotations	59
	7.4	Prope	rty implementation requirements	61
	7.5	Schen	na repository	61
	7.6	Refere	encing other schemas	62
	7.7	Sword	Ifish online repositories	62
		7.7.1	Registries	62
		7.7.2	Profiles	62
8	lmp	lement	ration requirements	63
	8.1		ity	63
	8.2		al constraints	63
	0.2	8.2.1	Redfish elements	63
		8.2.2	Storage Events	63
		8.2.3	Health and HealthRollup Propagation	64
	8.3		vering Swordfish resources	65
	0.5	8.3.1	Required Collections for Storage implementations	66
	8.4		Of Service requirements	67
	<b>∪.</b> →	Class	ZIOCI VICE ICQUIICIIICII	υı

Curardfich	Caalabla	Ctorogo	Managam	oot ADI	Specification	_
3worunsii	Scalable	Storage	Manageni	ent API	Specification	П

	8.5	HTTPs	status codes
		8.5.1	Overview
		8.5.2	Create
		8.5.3	Update, Replace, Delete
		8.5.4	Actions
		16.1.	
9			ype definitions 71
	9.1		ew
	9.2		uction
	9.3		sal properties
	9.4		ently used properties
	9.5		on Swordfish Objects
		9.5.1	Capacity
		9.5.2	CapacityInfo
		9.5.3	Identifier
		9.5.4	IOStatistics
		9.5.5	IOWorkload
		9.5.6	IOWorkloadComponent
		9.5.7	Location
		9.5.8	Oem 102
		9.5.9	Replicalnfo
		9.5.10	ReplicaRequest
		9.5.11	Schedule
		9.5.12	Status
	9.6	Sword	fish Schema Types
		9.6.1	CapacitySource 1.2.1
		9.6.2	CapacitySourceCollection
		9.6.3	ClassOfService 1.2.0
		9.6.4	ClassOfServiceCollection
		9.6.5	ConsistencyGroup 1.1.1
		9.6.6	ConsistencyGroupCollection
		9.6.7	DataProtectionLineOfService 1.3.0 160
		9.6.8	DataProtectionLoSCapabilities 1.2.0 168
		9.6.9	DataSecurityLineOfService 1.1.1
		9.6.10	DataSecurityLoSCapabilities 1.2.0
		9.6.11	DataStorageLineOfService 1.3.1
		9.6.12	DataStorageLoSCapabilities 1.2.2
		9.6.13	FeaturesRegistry 1.2.0
		9.6.14	FileShare 1.3.0

	Swordfish Scalable	Storage	Manage	ment API S	Specification
--	--------------------	---------	--------	------------	---------------

9.6.15	FileShareCollection	218
9.6.16	FileSystem 1.4.1	219
9.6.17	FileSystemCollection	230
9.6.18	FileSystemMetrics 1.0.1	232
9.6.19	HostedStorageServices	234
9.6.20	IOConnectivityLineOfService 1.2.1	235
9.6.21	IOConnectivityLoSCapabilities 1.2.0	241
9.6.22	IOPerformanceLineOfService 1.1.1	248
9.6.23	IOPerformanceLoSCapabilities 1.3.0	250
9.6.24	LineOfService 1.1.0	253
9.6.25	LineOfServiceCollection	255
9.6.26	NVMeDomain 1.2.0	256
9.6.27	NVMeDomainCollection	261
9.6.28	NVMeFirmwareImage 1.2.0 (deprecated)	263
9.6.29	SpareResourceSet 1.0.2	266
9.6.30	StorageGroup 1.6.0	269
9.6.31	StorageGroupCollection	283
9.6.32	StoragePool 1.9.1	285
9.6.33	StoragePoolCollection	318
9.6.34	StoragePoolMetrics 1.0.1	320
9.6.35	StorageReplicaInfo 1.4.0	323
9.6.36	StorageService 1.7.0	325
9.6.37	StorageServiceCollection	338
9.6.38	StorageServiceMetrics 1.0.1	340
9.6.39	StorageSystemCollection	342
9.6.40	Volume 1.10.1	343
9.6.41	VolumeCollection	399
9.6.42	VolumeMetrics 1.1.1	100
Annex A: Biblio	graphy	105
A.1 Overview	٧	105
A.2 Informat	tional references	105

# **List of Tables**

1	Revision history
2	Contributors
3	Approved normative references
4	Swordfish terms
5	Redfish terms
6	Normative language terms
7	Schema annotations
8	Default and Nullable Interaction 60
9	Universal properties
10	Frequent properties
11	Capacity properties
12	CapacityInfo properties
13	Identifier properties
14	DurableNameFormat property values
15	IOStatistics properties
16	IOWorkload properties
17	IOWorkloadComponent properties
18	IOAccessPattern property values
19	Location properties
20	LocationType property values
21	Orientation property values
22	RackOffsetUnits property values
23	Reference property values
24	Oem properties
25	Replicalnfo properties
26	ConsistencyState property values
27	ConsistencyStatus property values
28	ConsistencyType property values
29	ReplicaFaultDomain property values
30	ReplicaPriority property values
31	ReplicaProgressStatus property values
32	ReplicaReadOnlyAccess property values
33	ReplicaRecoveryMode property values
34	ReplicaRole property values
35	ReplicaState property values
36	ReplicaType property values

37	ReplicaUpdateMode property values
38	RequestedReplicaState property values
39	UndiscoveredElement property values
40	ReplicaRequest properties
41	Schedule properties
42	Status properties
43	Health property values
44	HealthRollup property values
45	Severity property values
46	State property values
47	CapacitySource 1.2.1 properties
48	CapacitySourceCollection properties
49	ClassOfService 1.2.0 properties
50	ClassOfServiceCollection properties
51	ConsistencyGroup 1.1.1 properties
52	AssignReplicaTarget action parameters
53	CreateReplicaTarget action parameters
54	RemoveReplicaRelationship action parameters
55	ResumeReplication action parameters
56	ReverseReplicationRelationship action parameters
57	SplitReplication action parameters
58	SuspendReplication action parameters
59	ConsistencyMethod property values
60	ConsistencyType property values
61	ReplicaType property values
62	ReplicaUpdateMode property values
63	ConsistencyGroupCollection properties
64	DataProtectionLineOfService 1.3.0 properties 160
65	CreateReplicas action parameters
66	RecoveryGeographicObjective property values 166
67	RecoveryTimeObjective property values
68	ReplicaType property values
69	DataProtectionLoSCapabilities 1.2.0 properties
70	SupportedRecoveryGeographicObjectives property values 173
71	SupportedRecoveryTimeObjectives property values
72	SupportedReplicaTypes property values
73	DataSecurityLineOfService 1.1.1 properties
74	Antivirus Scan Policies property values

75	ChannelEncryptionStrength property values 179
76	DataSanitizationPolicy property values
77	HostAuthenticationType property values
78	MediaEncryptionStrength property values
79	SecureChannelProtocol property values
80	UserAuthenticationType property values
81	DataSecurityLoSCapabilities 1.2.0 properties
82	SupportedAntivirusScanPolicies property values 187
83	SupportedChannelEncryptionStrengths property values 188
84	SupportedDataSanitizationPolicies property values 188
85	SupportedHostAuthenticationTypes property values 189
86	SupportedMediaEncryptionStrengths property values 190
87	SupportedSecureChannelProtocols property values 191
88	SupportedUserAuthenticationTypes property values 191
89	DataStorageLineOfService 1.3.1 properties
90	AccessCapabilities property values
91	ProvisioningPolicy property values
92	RecoveryTimeObjectives property values
93	DataStorageLoSCapabilities 1.2.2 properties 197
94	SupportedAccessCapabilities property values
95	SupportedProvisioningPolicies property values 201
96	SupportedRecoveryTimeObjectives property values
97	FeaturesRegistry 1.2.0 properties
98	FileShare 1.3.0 properties
99	DefaultAccessCapabilities property values
100	FileShareQuotaType property values
101	FileSharingProtocols property values
102	WritePolicy property values
103	FileShareCollection properties
104	FileSystem 1.4.1 properties
105	AccessCapabilities property values
106	CharacterCodeSet property values
107	FileSystemCollection properties
108	FileSystemMetrics 1.0.1 properties
109	HostedStorageServices properties
110	IOConnectivityLineOfService 1.2.1 properties
111	AccessProtocols property values
112	IOConnectivityLoSCapabilities 1,2.0 properties

113	SupportedAccessProtocols property values	4
114	IOPerformanceLineOfService 1.1.1 properties	8
115	IOPerformanceLoSCapabilities 1.3.0 properties	51
116	LineOfService 1.1.0 properties	4
117	LineOfServiceCollection properties	5
118	NVMeDomain 1.2.0 properties	7
119	NVMeDomainCollection properties	2
120	NVMeFirmwareImage 1.2.0 (deprecated) properties 26	3
121	NVMeDeviceType property values	5
122	SpareResourceSet 1.0.2 properties	6
123	StorageGroup 1.6.0 properties	0
124	AccessCapability property values	2
125	AccessState property values	2
126	AuthenticationMethod property values	3
127	StorageGroupCollection properties	4
128	StoragePool 1.9.1 properties	6
129	AddDrives action parameters	8
130	RemoveDrives action parameters	0
131	SetCompressionState action parameters	11
132	SetDeduplicationState action parameters	2
133	SetEncryptionState action parameters	2
134	NVMePoolType property values	3
135	PoolType property values	3
136	SupportedPoolTypes property values	4
137	SupportedProvisioningPolicies property values	4
138	SupportedRAIDTypes property values	5
139	StoragePoolCollection properties	9
140	StoragePoolMetrics 1.0.1 properties	21
141	StorageReplicaInfo 1.4.0 properties	4
142	StorageService 1.7.0 properties	5
143	SetEncryptionKey action parameters	8
145	StorageServiceCollection properties	9
146	StorageServiceMetrics 1.0.1 properties	0
147	StorageSystemCollection properties	.2
148	Volume 1.10.1 properties	4
149	AssignReplicaTarget action parameters	'5
150	ChangeRAIDLayout action parameters	
151	CreateReplicaTarget action parameters	'8

152	Initialize action parameters
153	RemoveReplicaRelationship action parameters
154	ResumeReplication action parameters
155	ReverseReplicationRelationship action parameters 382
156	SplitReplication action parameters
157	SuspendReplication action parameters
158	AccessCapabilities property values
159	EncryptionTypes property values
160	InitializeMethod property values
161	InitializeType property values
162	LBAFormatsSupported property values
163	LBAFormatType property values
164	NamespaceType property values
165	Operation property values
166	ProvisioningPolicy property values
167	RAIDType property values
168	ReadCachePolicy property values
169	RelativePerformance property values
170	ReplicaType property values
171	ReplicaUpdateMode property values
172	Type property values
173	VolumeType property values
174	VolumeUsage property values
175	WriteCachePolicy property values
176	WriteCacheState property values
177	WriteHoleProtectionPolicy property values
178	VolumeCollection properties
179	VolumeMetrics 1.1.1 properties

# **List of Figures**

1	Model Overview	33
2	Logical Subsystem in Swordfish Standalone Configuration	35
3	Swordfish Standalone Configuration Example	36
4	Logical Subsystem in Swordfish Integrated Configuration	37
5	Swordfish Integrated Configuration Example	38
6	Logical Subsystem in Integrated Service Configuration	50
7	Integrated Service Configuration Example	51
8	Logical Subsystem in Standalone Service Configuration	52
9	Standalone Service Configuration Example	53

#### **USAGE**

Copyright (c) 2016 - 2024 Storage Networking Industry Association. All rights reserved. All other trademarks or registered trademarks are the property of their respective owners.

Storage Networking Industry Association (SNIA) hereby grants permission for individuals to use this document for personal use only, and for corporations and other business entities to use this document for internal use only (including internal copying, distribution, and display) provided that:

- 1. Any text, diagram, chart, table or definition reproduced must be reproduced in its entirety with no alteration, and,
- 2. Any document, printed or electronic, in which material from this document (or any portion hereof) is reproduced must acknowledge SNIA copyright on that material, and must credit SNIA for granting permission for its reuse.

Other than as explicitly provided above, you may not make any commercial use of this document, or any portion thereof, or distribute this document to third parties. All rights not explicitly granted are expressly reserved to SNIA.

Permission to use this document for purposes other than those enumerated above may be requested by emailing tcmd@snia.org. Please include the identity of the requesting individual and/or company and a brief description of the purpose, nature, and scope of the requested use.

All code fragments, scripts, data tables, and sample code in this SNIA document are made available under the following license:

**BSD 3-Clause Software License** 

Copyright (c) 2024, Storage Networking Industry Association.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this
  list of conditions and the following disclaimer in the documentation and/or
  other materials provided with the distribution.
- Neither the name of Storage Networking Industry Association nor the names of its contributors may be used to endorse or promote products derived from

this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

#### **DISCLAIMER**

The information contained in this publication is subject to change without notice. SNIA makes no warranty of any kind with regard to this publication, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The SNIA shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use.

Suggestions for revisions should be directed to http://www.snia.org/feedback/.

#### **Current Revision**

SNIA is actively engaged in expanding and refining the Swordfish documentation. The most current revision can be found on the SNIA web site at https://www.snia.org/tech\_activities/standards/curr\_standards/swordfish.

#### **Contact SNIA**

Current SNIA practice is to make updates and other information available through their web site at http://www.snia.org.

#### FEEDBACK AND INTERPRETATIONS

Requests for interpretation, suggestions for improvement and addenda, or defect reports are welcome. They should be sent via the SNIA Feedback Portal at http://www.snia.org/feedback/ or by mail to SNIA, 5201 Great America Parkway, Suite 320, Santa Clara, CA 95054, USA.

#### INTENDED AUDIENCE

This document is intended for use by individuals and companies engaged in storage management.

#### **VERSIONING POLICY**

This document is versioned material. Versioned material shall have a three-level revision identifier, comprised of a version number "v", a release number "r" and an errata number "e". Future publications of this document are subject to specific constraints on the scope of change that is permissible from one revision to the next and the degree of interoperability and backward compatibility that should be assumed between products designed to this standard. This versioning policy applies to all SNIA Sword-fish versioned materials.

Version Number: Versioned material having version number "v" shall be backwards compatible with all of revisions of that material that have the same version number "v". There is no assurance of interoperability or backward compatibility between revisions of a versioned material with different version numbers.

Release Number: Versioned material with a version number "v" and release number "r" shall be backwards compatible with previous revisions of the material with the same version number, and a lower release number. A minor revision represents a technical change to existing content or an adjustment to the scope of the versioned material. Each minor revision causes the release number to be increased by one.

Errata Number: Versioned material having version number "v", a release number "r", and an errata number "e" should be backwards compatible with previous revisions of the material with the same version number and release number ("errata versions"). An errata revision of versioned material is limited to minor corrections or clarifications of existing versioned material. An errata revision may be backwards incompatible, if the incompatibility is necessary for correct operation of implementations of the versioned material.

# **Revision History**

The evolution of this document is summarized in Table 1.

**Table 1:** Revision history

Date	Rev	Notes
19September2016	1.0.0	Initial Release
12 October 2016	1.0.1	Errata release for general clean up and formatting consistency
1 November 2016	1.0.2	Errata release to change multiple collections types from collections (arrays) to ResourceCollections to conform to Redfish usage guidelines
		Change multiple collections' types from collections (arrays) to ResourceCollections to conform to Redfish usage guidelines and move NavigationProperties from Links section.
24 January 2017	1.0.3	Errata release to move complex types and enum to versioned namespace
		Schedule schema: add property
		json schema fix (Swordfish to swordfish)
		Specification enhancements, multiple areas
		User's guide: multiple new use cases and new document section
25 April 2017	1.0.4	Errata release with minor updates to schema move FileShare collection, integrate DMTF and SNIA versions of Volume, fix incorrect property references and update descriptions Update mockups. User's guide: Update cross-references.
3 October 2017	1.0.5	Errata release to include schema simplifications and other lessons from initial implementations, as well as general cleanup of specification.

Date	Rev	Notes
13 February 2018	1.0.6	Updated Storage Systems model – added notion of Integrated Service Configuration in addition to (and named) Hosted Service Configuration
		Added ComplexType common definition section
		Added/updated common Redfish property definitions
		Updates to conform to new SNIA templates.
12 October 2018	1.0.7	Enhanced Spare Capacity Management Model; Deprecated Remaining Capacity
		Added OpenAPI support: schema references and OpenAPI YAML files
		Added iSCSI properties for CHAP
		Event usage enhancements and guidance
		Volume schema updates – RAID Type enum (deprecating VolumeType usage), add ReplicaTargets
		Schema updates: Annotations enhancement Capabilities designations, owning entities, Redfish.Required usage
		Clarified and updated ClassOfService IsDefault property usage
		Updated Capabilities location in hierarchy
		Fix cardinality issue of StorageReplicaInfo usage in StorageGroups and Volume
		Consolidate Client and Server Endpoint Groups into single Endpoint Group entity (deprecate usage of separate Client Endpoint Group and Server Endpoint Group)
		Add MappedVolume construct to StorageGroup – adds LUN info and other properties

Date	Rev	Notes
		Clarified and updated ClassOfService IsDefault property usage
		Updated Capabilities location in hierarchy
		Fix cardinality issue of StorageReplicaInfo usage in StorageGroups and Volume
		Consolidate Client and Server Endpoint Groups into single Endpoint Group entity (deprecate usage of separate Client Endpoint Group and Server Endpoint Group)
		Add MappedVolume construct to StorageGroup – adds LUN info and other properties
8 November 2018	1.0.7 a	Restored RAIDType property that was missing from 1.0.7
		Minor correction to schema versioning
22 August 2019	1.1.0	Restructured to add features and profiles
		Add description of SupportedFeatures usage and requirements
		Add requirements for subsets of Add language to clarify support for use with and without the class of service (now an optional feature)
		Added descriptions of support for seamless extension of Redfish Storage model to Swordfish
		Add updated model diagrams to reflect new model permutations
		Added descriptions of new constructs (e.g., Consistency Groups)
		Cleaned up references to Redfish Specification based on latest version
		Add Status Codes clarification and constraints section
12 November 2019	1.1.0	Released as Technical Position

Date	Rev	Notes
12 November 2019	1.1.0 a	Released as Corrected Technical Position
		Formatting fixes – word wrap in pdf doc format to fix truncated lines
		Consistent object labeling in images (replace drive with disk)
		Editorial and grammar changes and cleanup to status code guidance section
24 March 2020	1.1.0 b	Released as Corrected Technical Position
		TLS requirements now based on both ISO and SNIA standards
		Redfish references now based on both ISO and SNIA standards
		Bibliography added
29 May 2020	1.2.0	Note: This release is done in conjunction with the DMTF's Redfish Forum Work-in-Progress June 2020 release of DSP-IS0014 (v0.95), which contains multiple schema to support this work. Both are released as Working Draft / work-in-progress for public review, and plan simultaneous releases in early fall 2020 to support full technical specification level capability and availability. Functionality availability in Swordfish
		includes:
		Enhancements to Volume, StoragePools
		New schema: NVMeDomain
		Other supporting documentation released in conjunction with this specification and schema bundle:
		<ul> <li>Multiple mockups reflecting multiple implementation permutation options (available on swordfishmockups.com)</li> </ul>

Date	Rev	Notes
		<ul> <li>Model overview documentation (NVMe to RF/SF Model Mapping Working Draft, dated May 2020)</li> </ul>
18 August 2020	1.2.1	Note: This release is done in conjunction with the DMTF's Redfish Forum 2020.3 Release of the Redfish Specification, schema bundle and other supporting materials.
		Functionality availability in Swordfish includes:
		<ul> <li>NVMe Mapping Support, Enhancements to Volume, StoragePools</li> </ul>
		Additional Enhancements in the Specification and schema:
		• Added InitializeMethod property to Volume.
		• Made DedicateSpareDrives ReadWrite-able
		<ul> <li>Added enhanced Volume Access Capabilities and usage in StorageGroup.</li> </ul>
		• Fix multiple URI issues across various schema.
		Updated formatting of tables to support automatic table numbering and ISO compatible table representation.
29 September 2020	1.2.1 a	Added bibliography and updated TLS references
20 October 2020	1.2.1 c	Updated with additional Redfish.URI annotations.
31 October 2020	1.2.1 c	Released as SNIA Standard
2 March 2021	1.2.2	Added sections to document use of complex types.
		Updated common properties sections.
		Schema changes:

Date	Rev	Notes
		Add actions to Add and Remove drives directly from StoragePool.
		Split NVMeFirmwareImage and NVMeDomains schemas.
		Deprecate use of NetworkPort; replace with Port.
		Update Redfish.URI references.
		Corrected \$ref references in JSON schema files.
		Fix incorrect references in deprecated JSON files.
30 August 2021	1.2.3	Adds updates / corrections to Redfish.URI annotations
		Add IsBootCapable to Volume
		Add SupportedPoolTypes to StoragePool
5 December 2021	1.2.3	Release as SNIA Standard
12 April 2022	1.2.4	Release as Working Draft. Schema changes:
		• FeaturesRegistry: Errata fix – make Features property a collection.
		<ul> <li>IOStatistics: clarify intent regarding reset / wrap.</li> </ul>
		• StoragePool: errata fixes for Actions.
		<ul> <li>Volume: errata fixes for Actions. Add: LBAFormatsSupported property to NVMeNamespaceProperties.</li> </ul>
12 July 2022	1.2.4 a	Release as SNIA Standard.
		Includes Errata fixes to multiple profiles.
20 June 2023	1.2.5 a	Release as SNIA Standard.
		Corrected missing section import.
		• Fix typos in schema.
22 January 2024	1.2.6	Release as Working Draft. Schema changes:

Date	Rev	Notes
		Copyrights updated to 2024.
		• Updates SNIA Front Matter.
		<ul> <li>Adds new Metrics for FileSystem,</li> <li>StoragePool, StorageService, and</li> <li>enhancements to VolumeMetrics. IOStatistics</li> <li>property moved to Metrics, and deprecated in FileSystem, StoragePool, StoragePool,</li> <li>StorageService (and Volume).</li> </ul>
		<ul> <li>Fully adds new mapping and masking models using Connections in RF Fabrics, deprecates StorageGroups URIs.</li> </ul>
		<ul> <li>Adds support for new volume properties: ProvidingStoragePool, ChangeStripSize, ALUA to manage reservations.</li> </ul>
		<ul> <li>NVMe: Adds NVMe Domain Management, including ALUA support with Domain Contents and Firmware Images.</li> </ul>
		<ul> <li>Updates and simplifies LBAFormat representation, and adds multiple namespace management.</li> </ul>
		• Deprecates NVMeFirmwareImage schema.
9 April 2024	1.2.6	Release as SNIA Standard
21 May 2024	1.2.7	Release as Working Draft
		<ul> <li>Move IOStatistics to unversioned namespace. This is used in:</li> </ul>
		FileSystemMetrics
		FileSystem
		StoragePoolMetrics
		StoragePool
		StorageServiceMetrics
		VolumeMetrics
		Volume

Date	Rev	Notes
		- Add guidance for Operations usage
		<ul> <li>Add guidance for volume state and status during long-running operations</li> </ul>
		- Expansion of \$metadata description

#### **About SNIA**

SNIA is a not-for-profit global organization made up of corporations, universities, startups, and individuals. The members collaborate to develop and promote vendor-neutral architectures, standards, and education for management, movement, and security for technologies related to handling and optimizing data. SNIA focuses on the transport, storage, acceleration, format, protection, and optimization of infrastructure for data. Learn more at www.snia.org.

## **Acknowledgements**

The SNIA Scalable Storage Management Technical Work Group, which developed and reviewed this work in progress, would like to recognize the significant contributions made by the following members listed in Table 2.

Table 2: Contributors

	Representatives
Member	(* – prior employer)
Broadcom Inc.	Richelle Ahlvers(*)
Celestica .	Krishnakumar Gowravaram
Cisco Systems, Inc.	Krishnakumar Gowravaram (*)
Dell Inc.	Patrick Boyd
	George Ericson
	Jim Pendergraft
	Sean McGinnis
	Michael Raineri

	Representatives
Member	(* – prior employer)
	Rich Roscoe
Futurewei Inc.	Sean McGinnis(*)
Hitachi Data Systems	Eric Hibbard
Hewlett Packard Enterprise	Jeff Hilland
	Chris Lionetti
	John Mendonca
	Doug Voigt
Inova Development Inc.	Karl Schopmeyer
Intel Corporation	Richelle Ahlvers
	Rajalaxmi Angadi
	Phil Cayton
	Klaudia Jablonska
	Mariusz Krzywienski
	Mateusz Mania
	Slawek Putyrski
	Paul von Behren
Kioxia	James Borden
Microsemi Corporation	Anand Nagarjan
Microsoft Corporation	Hector Linares
	Jim Pinkerton
	Michael Pizzo
	Scott Seligman
NetApp, Inc.	Don Deel
	Nilesh Maheshwari
ScienceLogic	Patrick Strick
VMware, Inc.	Murali Rajagopal

# 1 Abstract

The Swordfish Scalable Storage Management API ("Swordfish") defines a RESTful interface and a standardized data model to provide a scalable, customer-centric interface for managing storage and related data services. It extends the Redfish Scalable Platforms Management API Specification from the DMTF.

## 2 Scope

This document defines the Swordfish Scalable Storage Management API.

Swordfish is designed as an extension of the Redfish specification. This document is written with the presumption that the reader has a detailed understanding of the Redfish specification. This document cannot be fully understood without that context.

Swordfish extends the Redfish Scalable Platforms Management API Specification to define a comprehensive, RESTful API for storage management that addresses block storage, file systems, object storage, and storage network infrastructure. It is centered around common operational and business concerns of storage management, including:

- · Configuration and provisioning
- Monitoring
- Event and log management
- · Performance assessment
- Diagnostics
- Fault detection and remediation
- Security
- Accounting and resource consumption

The Redfish specification provides the protocols and a core set of data models and behaviors for the management of systems. It defines the elements and behaviors that are mandatory for all Redfish implementations. Additionally it defines additional elements and behaviors that can be chosen by system vendors or manufacturers. The specifications also defines points at which OEM (system vendor) extensions can be provided by a given implementation. The specifications specifies normative requirements for Redfish Services and associated materials, such as Redfish Schema files. The Redfish specifications does not set requirements for Redfish clients, but will indicate what a Redfish client should do in order to access and utilize a Redfish Service successfully and effectively.

A Swordfish implementation conforms to all requirements specified in the Redfish specifications.

The Swordfish specification defines additional data models and behaviors for the management of storage systems and storage infrastructure.

Swordfish is suitable for a wide range of storage, from small-scale object drives, integrated RAID cards or RBODs providing storage services, to external disk arrays or file

servers, to infrastructure providing storage services for converged, hyperscale and large scale cloud environments. It includes support for multiple protocol types, including NVMe and NVMe-oF. Supporting documentation is provided to detail the mapping of Swordfish objects and properties to NVMe and NVMe-oF standard interfaces.

In addition to its storage model, Swordfish includes emerging functionality, such as clearly-defined classes of service, which provide a consistent means to map highlevel business goals and objectives to specific, storage-based actions and requirements, and can be applied uniformly across a broad spectrum of storage configurations and storage types (e.g., block storage, file systems, object stores). Common storage management functionality covered by a class of service interface includes snapshots, replication, mapping and masking, and provisioning.

# **3 Normative References**

#### 3.1 Overview

The documents referenced in Table 3 are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

# 3.2 Approved references

The approved references that contribute to this document are summarized in Table 3.

**Table 3:** Approved normative references

Tag	Title (Version)	Author	URL
ISO - 8601	Data elements and interchange formats  - Information interchange – Representation of dates and times – Part 1: Basic rules	ISO / IEC	<a href="http://www.iso.org/is">http://www.iso.org/is</a> o/home/store/catalogue ics/catalogue_detail ics.htm?csnumber=70907 >
ISO - Direct	ISO / IEC Directives, Part 2: Principles and rules for the structure and drafting of ISO and IEC documents	ISO / IEC	<a href="https://www.iso.org/s">https://www.iso.org/s</a> ites/directives/curren t/part2/index.xhtml>
Redfish	Redfish Scalable Platforms Management API Specification (v1.18.0)	DMTF	<a href="https://www.dmtf.org/sites/default/files/stan-dards/documents/DSP0">https://www.dmtf.org/sites/default/files/stan-dards/default/files/stan-dards/documents/DSP0</a> 266_1.18.0.pdf>

Tag	Title (Version)	Author	URL
OData	Open Data Protocol (v. 4.01)	OASIS	<a href="http://docs.oasis-ope">http://docs.oasis-ope</a> n.org/odata/odata/v4.0 1/odata-v4.01-part1-pr otocol.html>
RFC3986	Uniform Resource Identifier (URI): Generic Syntax (2005)	The Internet Society	<a href="http://www.rfc-base.o">http://www.rfc-base.o</a> rg/txt/rfc-3986.txt>
CSDL	Common Schema Definition Language (4.01)	OASIS	<a href="https://docs.oasis-op"><a href="https://docs.oasis-op">https://docs.oasis-op</a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a>
ITIL	ITIL Glossary (2011)	ITIL	<a href="https://www.alaska.ed">https://www.alaska.ed</a> u/files/oit/ITIL_2011_ English_glossary_v1.0. pdf>
Units	The Unified Code for Units of Measure (v2.0.1)	Regenstrief Institute, Inc. and the UCUM Organizatio n	<a href="http://unitsofmeasure">http://unitsofmeasure</a> .org/trac>
ISO-2064 8	Information technology — TLS specification for storage systems	ISO/IEC	<a href="https://www.iso.org/s">https://www.iso.org/s</a> tandard/68622.html>
SPC-4	SCSI Primary Commands - 4 (SPC-4) INCITS 513-2015	T10	<a href="http://www.techstreet">http://www.techstreet</a> .com/cgi-bin/joint.cgi /incits>
Features	Swordfish Features Registry, version 1.5.1	SNIA	<pre><https: org="" redfish.dmtf.="" registries="" registry.1.6.0.json="" sh="" swordfi="" swordfishfeature="" v1=""></https:></pre>

Tag	Title (Version)	Author	URL
Messages	Swordfish Message Registry, version 1.0.2	SNIA	<a href="https://redfish.dmtf">https://redfish.dmtf</a> . org/registries/swordfi sh/v1/Swordfish.1.0.2. json>
EnergySt ar	ENERGY STAR Data Center Storage Version 2.1 Final Specification – January 19, 2022	EPA	<pre><https: 20version%202.1%20fina="" default="" energy%20star%20data%20center%20storage%="" f="" fi="" l%20specification_0.pd="" les="" r.gov="" sites="" www.energysta=""></https:></pre>
NVMe Command	NVM Command Set Specification	NVM Express	<a href="https://nvmexpress.org/developers/nvme-comm">https://nvmexpress.org/developers/nvme-comm</a> and-set-specifications />

# 3.3 References under development

None defined in this document.

# 3.4 Other references

None defined in this document.

## 4 Terms and Definitions

#### 4.1 Overview

In this document, some terms have a specific meaning beyond the normal English meaning. Those terms are defined in this clause. New terms, frequently used Redfish terms.

## 4.2 Swordfish-specific Terms

#### 4.2.1 Definitions

The terms listed in Table 4 are used in this document.

Table 4: Swordfish terms

Term	Definition
Model	A set of resources and the relationships between them that define their semantics, behavior, and state.
Resource	A central element in a model, which represents a physical construct or a logical service, and is further defined by other model elements.
Schema	A textual representation of the resources, relationships, and interactions within a model.
Swordfish service	An extension to the Redfish Service that conforms to the Swordfish specification, and provides RESTful storage management functionality.

#### 4.2.2 Symbols and abbreviated terms

None in this document.

#### 4.3 Reference to Redfish terms

Many terms in this document were originally defined in the Redfish Specification. Some of the more common terms and definitions are reproduced in Table 5, as an

aid to the reader.

Table 5: Redfish terms

Term	Definition (as of 16 August 2019)
OData	The Open Data Protocol, as defined in OData-Protocol.
OData Service Document	Resource that provides information about the service root for generic OData clients.
Redfish schema	A set of human and machine-readable documents that define Redfish resources using one or more of the supported schema definition languages (OData Common Schema Definition Language - CSDL, JSON, OpenAPI).
Redfish service	Implementation of the protocols, resources, and functions that deliver the interface that this specification defines and its associated behaviors for one or more managed systems.
Request	A message from a client to a service.
Service Root	Starting-point resource for locating and accessing the other resources and associated metadata that make up an instance of a Redfish service.

# 4.4 Keywords (normative language terms)

This document conforms to ISO/IEC Directives, Part 2 for keyword usage. The most common terms and their intended meanings are summarized Table 6.

**Table 6:** Normative language terms

Term(s)	Meaning
shall / shall not	Used to identify objectively verifiable criteria to be fulfilled and from which no deviation is permitted if compliance with the document is to be claimed
should / should not	Used to identify a suggested possible choice or course of action deemed to be particularly suitable without necessarily mentioning or excluding others

Term(s)	Meaning
may / need not	Used to convey consent or liberty (or opportunity) to do something
can / cannot	Expected or conceivable material, physical or causal outcome
must	Identifies a constraint or obligation on the user of the document, typically due to one or more legal requirements or laws of nature, that is not stated as a provision of the standard NB: "must" is not an alternative for "shall", and should only be used for constraints that arise from outside this standard

# **5 Swordfish Overview**

#### 5.1 Introduction

The Swordfish Scalable Storage Management API ("Swordfish") defines a RESTful interface and a standardized data model to provide a scalable, customer-centric interface for managing storage and related data services. It extends the Redfish Scalable Platforms Management API Specification from the DMTF.

#### 5.2 Relation to Redfish

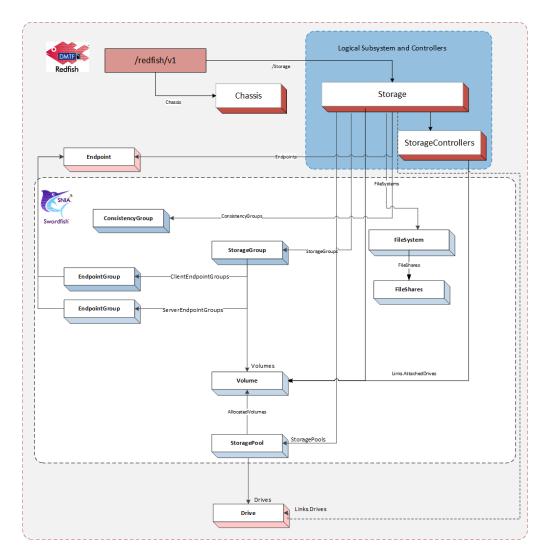


Figure 1: Model Overview

The Swordfish service interface extends the Redfish service interface. As such, a Swordfish service is a Redfish service and includes all required elements of the Redfish model, as illustrated by Figure 1.

The storage systems shall be instantiated in one of two places in the hierarchy:

- · directly in the Storage resource collection, or
- attached to a ComputerSystems, with an associated reference link in the StorageSystems resources collection at the ServiceRoot. In this case, there shall also be a reference link to the Storage resource in the Storage resource collection at the ServiceRoot.

As a result, a Swordfish client is always able to locate the storage systems managed by the Swordfish service in the ServiceRoot via the Storage resource collection; this may be a combination of references to instances and instantiated instances.

The physical infrastructure is modeled using Redfish Chassis.

As modeling for storage systems may cover both logical and physical constructs, Swordfish management clients that are focused on logical storage management use cases may choose to manage functionality entirely by way of logical resources.

Each Swordfish service is accessed via well known URLs on the system supporting the Swordfish Service. Since Swordfish is an extension of Redfish, these URLs are the same as for accessing the Redfish defined aspects of the service.

#### **5.3 Storage System Models**

Swordfish has been designed to support a broad range of configurations, requirements, size and complexity, as well as logical and physical architectures. As a result, there are two primary methods of modelling the storage system for a Swordfish implementation:

1. Swordfish Standalone Configuration

The standalone configuration instantiates the logical storage system instance representation in the Storage resource collection directly off the Service Root. The logical storage system is modeled using the Redfish Storage and StorageController resources, as shown in Figure 2. Managed resources are connected to the Storage resource, including Volumes and StoragePools.

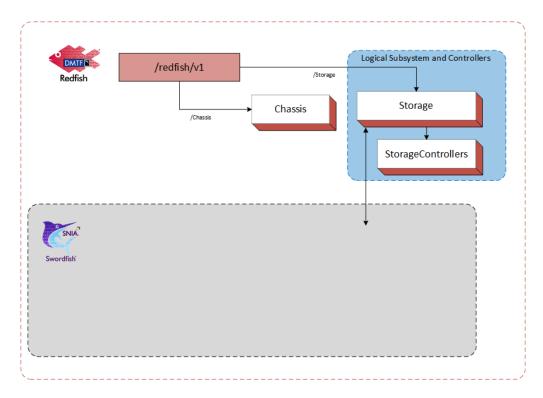


Figure 2: Logical Subsystem in Swordfish Standalone Configuration

This configuration works well for standalone devices or storage systems. An example of a Storage System for an standalone configuration is shown in Figure 3.

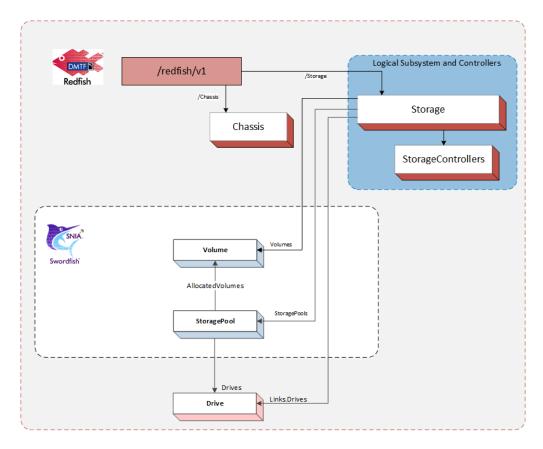


Figure 3: Swordfish Standalone Configuration Example

#### 2. Swordfish Integrated Configuration

The integrated configuration attaches to the Storage collection within the same ComputerSystem model instantiation as the server where the physical element resides.

The logical storage system is modeled using the Redfish Storage and Storage—Controller resources. The Storage resource is located in the Redfish hierarchy contained by ComputerSystems, typically running as ApplicationServers. The physical infrastructure is modeled using Redfish Chassis. Managed resources are connected to the Storage resource, including Volumes and StoragePools.

The integrated configuration is illustrated in Figure 4.

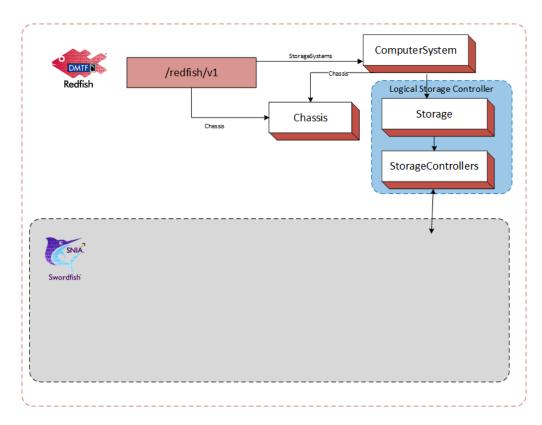


Figure 4: Logical Subsystem in Swordfish Integrated Configuration

This configuration works well when the storage system can be modeled by simply instantiating a new Storage object within an existing computer system. An example of a Storage System for an integrated configuration is shown in Figure ref{Figure\_5}.

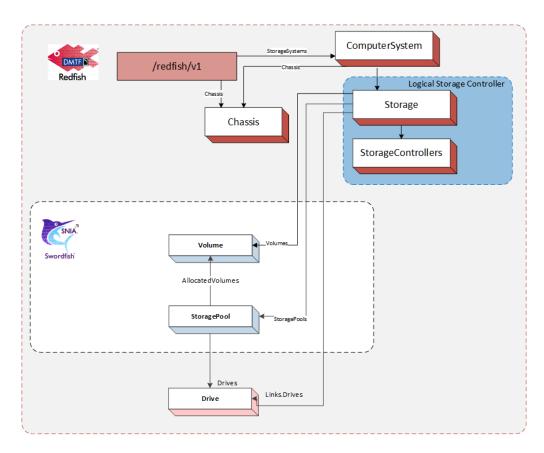


Figure 5: Swordfish Integrated Configuration Example

### 5.4 Swordfish model overview

# MODEL OVERVIEW DESCRIPTION ### The ServiceRoot

The service root serves as the base for any Redfish or Swordfish service. It is always published at a well-known URI of /redfish/v1. The base service root can be accessed without a secure connection.

There are multiple required services and resources defined in the Redfish specification for any Redfish or Swordfish service; these include components such as the OData service document at /redfish/v1/odata, the schema metadata at /redfish/v1/\$metadata, and services to provide authentication. Refer to the Redfish Specification for full details.

For Swordfish management, the following elements are common:

- Storage: A reference to the Storage resource collection.
- Systems: A reference to a Systems resource collection.
- Chassis: A reference to a Chassis resource collection.

- Registries: A set of administrative elements containing a Features registry and other components.
- Managers: A reference to a Managers resource collection.
- Fabrics: A reference to a Fabrics resource collection.
- EventService: The event management service.
- StorageSystems: An optional reference to a StorageSystems resource collection.
- **5.4.0.1 The Storage resource collection** A resource collection that references a set of Storage resources that each represents a storage subsystem. This collection can contain either resources or references to instances of Storage resources. Each Storage resource represents an instance of a storage subsystem. For Swordfish subsystems, refer to the Swordfish model overview for details on required elements.
- **5.4.0.2** The Systems resource collection A resource collection that references a set of ComputerSystem resources that each represents a general purpose application server. Each ComputerSystem resource will have an entry with the value of "ApplicationServer" in its HostingRoles property. A particular ComputerSystem resource can be in both the StorageSystems and Systems collections.
- **5.4.0.3 The Chassis resource collection** A resource collection that references a set of Chassis resources. Each Chassis resource represents physical containers (i.e., sheet-metal confined spaces and logical zones like racks, enclosures, chassis, and all other containers). Subsystems (e.g., sensors), which operate outside of a system's data plane (meaning the resources are not accessible to software running on the system) are linked either directly or indirectly through this resource.

### 5.4.1 The StorageSystems resources collection

An optional reference to a ComputerSystemCollection with members of type ComputerSystem that have Swordfish managed storage attached. They will have an entry with the value of "StorageServer" in their HostingRoles property. This collection, then, is a resource collection that references a set of ComputerSystem resources that each represents a storage server. Each ComputerSystem resource will have an entry with the value of "StorageServer" in its HostingRoles property. A particular ComputerSystem resource can be a member of both the StorageSystems resource collection and the Systems resource collection.

### 5.4.2 The Storage resource

The storage system exposes logical storage, associated resources and related functionality. Storage resources can be found in the service root or service container via the Storage resource collection, and are attached to the Storage object within the Storage resource collection.

The storage system typically provides the ability to create, manage and present block, file or object store from a set of back-end media, presented to one or more hosts. Storage controllers can work in coordinated sets of one or more to present value-add capabilities, such as failover, data protection, and data path management within the storage system, that are represented through the various resources within the storage system.

The following are the principal properties of Storage that point to resources managed or defined by the storage system:

- Controllers: A reference to a collection of StorageController resources.
- Drives: A reference to a collection of Drive resources used for storage.
- Enclosures: A reference to a collection of Chassis resources that contain storage related resources.
- FileSystems: A reference to a collection of FileSystem resources.
- StorageGroups: Deprecated in favor of ConsistencyGroups.
- ConsistencyGroups: A reference to a collection of ConsistencyGroup resources.
- StoragePools: A reference to a collection of StorageGroup resources.
- Volumes: A reference to a collection of Volume resources.

Key properties of Storage used for access rights management, connectivity management, and consistency management, include:

- Endpoints: A reference to a collection of Endpoint resources used to access storage.
- EndpointGroups: A reference to a collection of EndpointGroup resources.

The following properties are created in the /redfish/v1/Fabrics to support access rights management, connectivity management, and consistency management, include:

• Fabrics: A reference to a collection of Fabric resources.

- Connections: A reference to a collection of Connection resources.
- Zones: A reference to a collection of Zone resources.
- Switches: A reference to a collection of Switch resources.

**5.4.2.1 The StorageController resource** The storage controller presents the foundational resources used by the storage system. It generally contains connectivity resources between the system and connected consumers.

A StorageController may represent either a physical or logical controller.

For direct-attach configurations, a StorageController instance is commonly used to represent the host-side physical controller, such as an HBA, or RAID controller. This includes properties such as Port to enumerate connectivity information.

Other key properties, when representing a physical controller:

- SpeedGbps
- SupportedControllerProtocols and SupportedDeviceProtocols
- Controller capabilities, such as cache, battery backup information, and SupportedRAIDTypes
- AttachedVolumes
- EnvironmentMetrics only used for physical representations
- Ports

For NVMe devices, a storage controller is the interface between a host and an NVM subsystem. When PCI Express is used as the transport, a controller is also a PCI Express function.

It may represent the following capabilities:

- Modeling the interface between hosts and Volumes (IO controller)
- Access to administrative / management capabilities (admin controller)
- Network discovery of available volumes, and subsystems (discovery controller)

Key properties when representing a logical NVMe controller:

- Endpoints
- SupportedControllerProtocols
- AttachedVolumes
- NVMeControllerAttributes, NVMeControllerProperties

**5.4.2.2 The Endpoint resource** Endpoints represent one end of a protocol specific connection that supports sending or receiving messages according to a particular protocol. Endpoints are used for access rights management, connectivity management, and consistency management. Endpoint objects are instantiated in the /redfish/v1/Fabrics/Endpoints collection, and referenced elsewhere.

For access rights management, the Endpoint is used in conjunction with Connections. This use case reflects the target's view of configured access to initiators.

For connectivity rights management, the Endpoint is used in conjunction with Switches and Zones. In this case, the endpoints reflect the fabric view of both the initiator and target endpoint identifiers.

Key properties for Endpoints for both access rights management and connectivity management include:

- EndpointProtocol
- identifiers
- ConnectedEntities
- **5.4.2.3 The Endpoint Collection resource** The EndpointCollection is a resource collection that references a set of Endpoint resources.
- **5.4.2.4** The EndpointGroup resources EndpointGroup resources contain a set of Endpoints to be used for the same purpose, such as for access management, connectivity management, and consistency management. EndpointGroups can be used to simplify operations against large groups of Endpoints.

For consistency management, Endpoints are used to group together to provide single access and connectivity management for volumes in consistency groups.

### 5.4.3 The Consistency Group resource

ConsistencyGroups represent a set of volumes that are managed as a group. Group level management allows system and application level activities to be performed on a set of data that spans volumes. ConsistencyGroups are typically used to enforce write-order consistent behavior throughout a set of members. Other activities include device-level replication operations, as well as system level functions, such as reset.

When ConsistencyGroups are implemented, they are attached to a Storage resource, and its internal Volumes collection is constructed from a subset of the Volumes collection of the Storage resource. The ConsistencyGroup can also be used to manage across replicas.

ConsistencyGroups should be used in place of the deprecated Storage-Groups.

### 5.4.4 The ConsistencyGroup Collection resource

The ConsistencyGroupCollection is a resource collection that references a set of ConsistencyGroup resources.

### 5.4.5 The StorageGroup resource

StorageGroup usage has been deprecated in favor of ConsistencyGroup usage.

StorageGroups represent a set of volumes that are managed as a group in order to facilitate mapping and masking, in which the volumes of a storage group are collectively exposed or hidden to a set of clients.

The set of volumes is specified by the Mapped Volumes attribute. MappedVolumes is a resource collection of the Mapped Volume construct (a tuple of a pointer to a volume and a corresponding Logical Unit Number for that volume).

The set of client endpoints to which the volumes can be exposed is specified by the ClientEndpointGroupsattribute. The ClientEndpointGroup resource specifies a collection of EndpointGroup resources.

The set of server endpoints to which the volumes can be exposed is specified by the ServerEndpointGroupsattribute. The ServerEndpointGroup resource specifies a collection of EndpointGroup resources.

### 5.4.6 The StoragePool resource

The StoragePool resource represents unassigned storage capacity that can be used to produce storage volumes or other storage pools.

The following are the principal properties of StoragePool that are used to create or identify resources provisioned or supported by the storage pool:

- AllocatedVolumes: A reference to a collection of Volume resources that have been provisioned from the storage pool.
- AllocatedPools: A reference to a collection of StoragePool resources that have been provisioned from the storage pool.
- CapacitySources: A reference to a resource collection that provides pointers to the capacity sources that are used to provide the underlying capacity for this storage pool.
- RAIDTypes []: The set of RAIDTypes supported by this StoragePool. This may be set upon StoragePool creation, or may be a reflection of the implementation's ability to support different RAID types. Consumers may use this property to determine what RAID types are available from specific StoragePool instances for additional Volume creation requests, or what RAIDTypes have been applied to Volumes already allocated.
- Capacity (allocated and consumed)
- IO / performance and other metrics
- Spare management
- Pool type

Key operations include managing efficiency, protection and replication capabilities (e.g., deduplication, compression, encryption).

For NVMe and NVMe-oF devices, StoragePools continue to represent the underlying storage capacity. StoragePools are used to map to collections of storage capacity that have specific, related properties. These include NVMe Endurance Groups and NVM Sets.

**5.4.6.1 The Volume resource** Volume resource represents an addressable container of storage, sometimes referred to as a "Logical Unit", "LU", "LUN", or "StorageVolume" in the storage industry.

Volume is a foundational object for storage, and is extended in many ways, dependent on the desired system feature set. Potential usages for Volume include:

 providing for block-addressable storage, Volumes can also be further refined for particular implementations, such as key-value, object store, or other technologies;

- serving as building block for FileSystems, FileShares, datastores, and object stores:
- being grouped into write-order consistent ConsistencyGroups;
- virtualizing physical media (e.g., drives, memory);
- providing protection from underlying media failures;
- allowing for aggregation or slicing of physical resources into desired size;
- facilitating storage efficiency and protection representation and management (e.g., compression, deduplication);
- supporting replication and protection (e.g., encryption).

Key related elements: - Endpoint: Access to the volume is modeled through Endpoints. These cover direct connect protocols (e.g., SAS and SATA), as well as fabric-capable connection protocols. - StoragePool: Many of the characteristics of a Volume can be also managed across a set of Volumes from its StoragePool.

For block-addressable applications, key properties include information representing the block usage:

- BlockSizeBytes
- · Capacity, including allocated and consumed
- RAIDType
- Access capabilities modeled through Endpoints
- Relationship to underlying storage constructs (physical or logical) is typically represented through the StoragePool
- Usage (when known by the system)
- IO / performance and other metrics

Operations for block-addressable Volume may include:

- Expand
- Create / manage replicas
- Encrypt / SecureErase
- Initialize
- Change RAID layout and / or type

The Operations property presents a list of Operations currently running on the Volume. As Operations are both long-running and may be invoked from either the Redfish/Swordfish interface or via independent means, the Operations property provides a mechanism independent of the task service to show their status.

A GET on the Volume during specific long-running operations should also clearly indicate the in-process change, setting the Volume's Status. Health and State. State correspondingly.

- While transformational changes are in progress, the Status. Health should be set to "Updating" and Status. State should be set to "Warning". This includes:
  - Change RAID layout and / or type
  - Encrypt / decrypt
- Set Status. State to "Unavailable Offline" when in the process of creating a Volume and the volume is not yet available for use:
  - Initialize

Volumes are also central to application-specific extensions to storage modeling. For example:

- When using replication, StorageReplicaInfo contains descriptions and pointers to the Volumes employed.
- For storage devices with NVMe interfaces, Volumes:
  - Represent NVMe namespaces
  - Namespaces can be block, object, ZNS (zoned namespace), and KV (key value), which can be determined by the Type property within NVMeNamespaceProperties
  - Contain indications of NVMe capabilities via NamespaceFeatures
  - Show relationships to NVMe logical controllers

Additional information can be found in the NVMe Command Set Specification.

### 5.4.7 The FileSystem resource

This FileSystem resource represents a file system. Each FileSystem may contain a collection of FileShares that can be presented to hosts.

**5.4.7.1 The Fabric resource** The Fabric resource is used to reflect both access rights and connectivity.

When representing access rights, a Fabric contains:

- Endpoints
- Connections
- EndpointGroups, as needed

In this role, the Fabric contains objects that define access capabilities, and the scope that they apply to. This includes the logical data storage entities (e.g., volumes,

filesystems) to which the defined access rights apply, as well as the protocol connection information for each included object.

A fabric modelling connectivity management contains objects that define the corresponding transport protocol's access and configuration information, as well as the protocol connection information for logical objects within the storage system. Connectivity is reflected by describing the allowed or restricted connections. Connectivity-related objects within a Fabric include:

- Endpoints
- EndpointGroups
- Switches
- Zones

**5.4.7.2 The Connection resource** The Connection resource describes the access permissions that Endpoints (or groups of endpoints) have with other resources. It also describes the association of access capabilities to specified logical data storage entities.

Key properties for Connections include:

- ConnectionType
- VolumeInfo
- Endpoints and EndpointGroups (in Links)

**5.4.7.3 The Zone resource** The Zone resource describes the allowed / disallowed connectivity between endpoints.

**5.4.7.4 The Switch resource** The Switch resource describes physical interconnect information, including physical port configuration information.

Key properties include:

- SupportedProtocols
- SwitchType
- Ports
- Other properties as needed to describe the physical switch attributes for monitoring, asset management, and configuration

# **6 Features and Profiles**

#### 6.1 Overview

Features are high-level descriptions of functionality which an implementation uses to advertise what functionality it currently supports, and for some features, is capable of supporting.

The detailed definitions required to describe to implementers how to implement a feature are written in profile definition files. A feature is generally represented in one (but may be more) profile definition file, or profile.

Profiles are detailed descriptions that describe down to the individual property level what functionality is required in order to advertise features. Different profile definitions can exist for the same feature type but for various types of storage configurations: Swordfish.Block.Provisioning, Swordfish.File.Provisioning

The Swordfish Features Registry shall be used to advertise what standard and Oem Features an implementation supports.

### 6.2 Requirement for SupportedFeatures

SupportedFeatures entries in the Features registry represent the client's primary initial runtime view of the capabilities of a Swordfish implementation. Without properly formed entries in this registry, there is no visibility to an implementation's functionality.

Swordfish implementations shall implement the Features registry and advertise at least one supported feature from the SwordfishFeaturesRegistry in order to be considered a Swordfish implementation.

Features define coarse-grained sets of functionality. In order to advertise a feature (using the SupportedFeature mechanism in the SupportedFeatures Registry), the implementation must support the complete set of functionality as defined in the corresponding profile.

The Swordfish Features Registry publishes the official list of supported SNIA Features, and provides a high-level description of their functionality. Many of those features are self-explanatory (e.g., local replication, remote replication), but there are some features where additional context is appropriate:

- Energy Star for Storage
- NVMe and NVMe-oF

#### Class of Service

### 6.3 EnergyStar for Storage Feature

The EnergyStar for Storage Feature and profile has been created to formalize the requirements from the ENERGY STAR Data Center Storage Program Requirements on storage products. The profile indicates what properties Swordfish implementations need to support in order to properly instrument EnergyStar reporting capability. This functionality is intended to support EnergyStar data gathering requirements as part of the EnergyStar certification process.

#### 6.4 NVMe and NVMe-oF Features

NVMe features and profiles are defined to provide definitions for specific NVMe devices and configurations. The NVMe profiles also include references to non-NVMe specific profiles, such as those specifying the features for discovery, access rights, connectivity rights, and management controllers.

Profiles defined specifically for NVMe device types all use a common naming scheme, and typically start with SwordfishNVMe.

#### 6.5 Class of Service Feature

#### 6.5.1 Overview

Swordfish supports a ClassOfService feature. The ClassOfService functionality supports systems that are capable of providing a greater level of management automation, where a higher-level set of goals is provided as direction rather than requiring parameterized inputs for all configuration actions.

The Class of Service feature uses a combination of device-defined capabilities to structure LinesOfService, which are sets of available functionality in a given system, that can then be grouped together to provide classes of service.

When Class of service functionality is implemented, the Swordfish functionality may be entirely exposed through the StorageService resource. Each Swordfish StorageService is located in the ServiceRoot (and ServiceContainer) via the StorageServices resource collection.

#### 6.5.2 Class of Service Model

For Swordfish with a class of service interface, the following two models apply. Either model choice results in the same storage service, regardless of the storage system model.

### 1. Integrated Service Configuration

The storage systems managed by the Swordfish storage service are modeled using the Redfish Storage resource and StorageController resource collections. The Storage resource is located in the Redfish hierarchy contained by ComputerSystems, typically running as ApplicationServers. The physical infrastructure is modeled using Redfish Chassis, as shown in Figure 6.

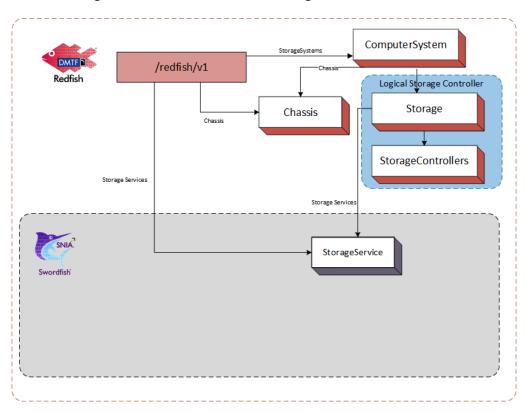


Figure 6: Logical Subsystem in Integrated Service Configuration

This configuration works well when the storage service is hosted by a storage resource within a computer system. An example of a Storage Service for an integrated service configuration is shown in Figure 7.

Note: This diagram and the discussion of the configuration description have been simplified slightly to avoid confusion. A full implementation would likely include additional links to the logical storage controller resources.

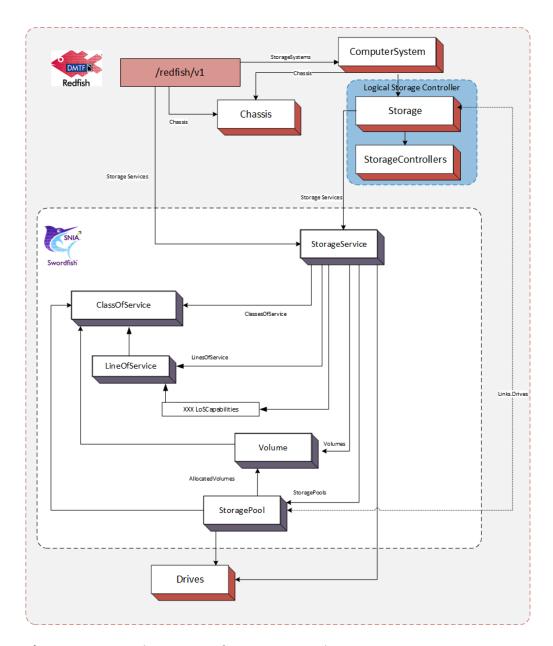


Figure 7: Integrated Service Configuration Example

### 2. Standalone Service Configuration

The storage systems managed by the Swordfish storage service are located in the ServiceRoot (and ServiceContainer) via the Storage resource collection.

They model the logical storage system using Redfish Storage and "StorageController" resources. The physical infrastructure is modeled using Redfish Chassis. This is shown in Figure 8.

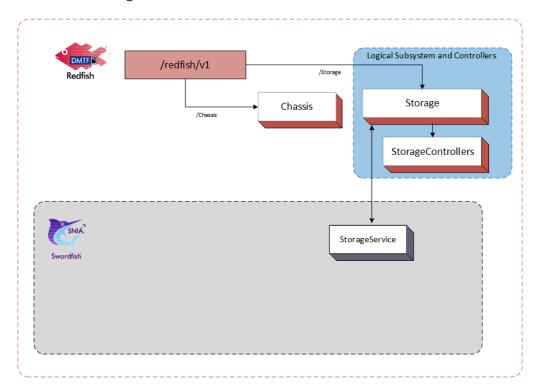


Figure 8: Logical Subsystem in Standalone Service Configuration

This configuration works well when the standalone storage system directly hosts the storage service(s). An example of a Storage Service for a hosted service configuration is shown in Figure 9.

Note: This diagram and the discussion of the configuration description have been simplified slightly to avoid confusion. A full implementation would likely include additional links to the logical storage controller resources.

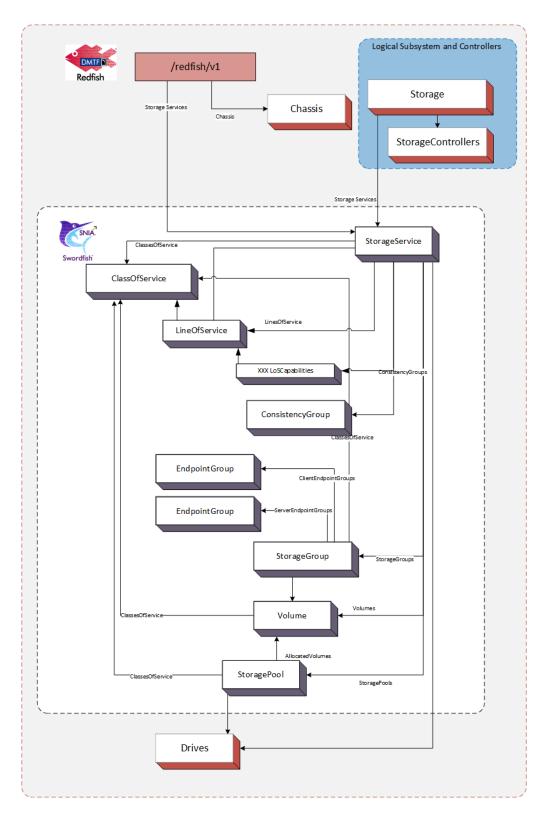


Figure 9: Standalone Service Configuration Example

#### 6.5.3 ServiceRoot Additions

When the StorageService feature is implemented, the following is added to the ServiceRoot:

• StorageServices: A resource collection that references a set of StorageService resources. Each StorageService resource represents the resources and behaviors supported by that storage service.

### 6.5.4 The StorageService resource

**6.5.4.1 Principal Properties** The storage service is hosted on a storage system and exposes logical storage, associated resources and related functionality. Storage service resources can be found in the service root or service container via the Storage-Services resource collection.

The following are the principal properties of StorageService that point to resources managed or defined by the storage service:

- ClassesOfService: A reference to a resource collection that specifies the supported ClassOfService resources.
- Drives: A reference to a resource collection that collects Drive resources used for storage.
- Enclosures: A reference to a resource collection that collects Chassis resources that contain storage related resources.
- Endpoints: A reference to a resource collection that collectsEndpoint resources used to access storage.
- FileSystems: A reference to a resource collection that collects FileSystem resources.
- EndpointGroups: A reference to a resource collection that collects EndpointGroups resources.
- StorageGroups: A reference to a resource collection that collects StorageGroup resources.
- StoragePools: A reference to a resource collection that collects Storage– Group resources.
- Volumes: A reference to a resource collection that collects Volume resources.
- HostingSystem: A reference to the ComputerSystem instance that hosts this StorageService.

**6.5.4.2 Capabilities and Lines of ServiceRoot** The following properties each define a set of attributes, which describe capabilities that the storage service may support:

- DataProtectionLoSCapabilities: Replicas that protects data from loss.
- DataSecurityLoSCapabilities: Data security service level requirements. The data security characteristics enable the storage system to be used in an environment where compliance with an externally-specified security standard or standards is required. Examples of such standards include FIPS-140, HIPAA and PCI.
- DataStorageLoSCapabilities: Provisioning and access characteristics for storage of the data.
- IOConnectivityLoSCapabilities: IO connectivity requirements for access to the data.
- IOPerformanceLoSCapabilities: IO performance requirements for access to the data.

In each of the above, not all combinations of attribute values defined within a capability are likely to be supported by the storage service.

Known, supported combinations of attribute values are used to construct entries in the LinesOfService array property. Not all attributes of a line of service entry need be specified (i.e. some may be Null). If an attribute has no value, the storage service may choose any supported values when provisioning for that entry. Otherwise, the line of service attribute values specifies the kind or level of service to be provided.

**6.5.4.3** The ClassOfService resource A class of service represents a choice of utility or warranty offered to customers by a service. (ITIL uses the term service option. See the Normative References.)

Each ClassOfService resource is a uniquely named description of the characteristics of one choice of utility or warranty for a service. Each ClassOfService is a description of the kind and quality of service to provide and is not intended to describe how the service provides that service.

Each ClassOfService is defined by an aggregation of lines of service. Supported lines of service are listed in the corresponding capabilities attributes of the storage service, (see above).

Currently defined lines of service are:

- Data Protection: Describes the characteristics of a replica that protects data from loss.
- Data Security: Describe data security service level requirements. The data security characteristics enable the storage system to be used in an environment where compliance with an externally-specified security standard or standards is required. Examples of such standards include FIPS-140, HIPAA and PCI.
- Data Storage: Describes provisioning and access characteristics for storage of the data.
- IO Connectivity: Describes IO connectivity requirements for access to the data.
- IO Performance: Describes the IO performance requirements for access to the data under a particular workload.

Some advertised ClassOfService resources are created by the service implementation. These are generally not changeable and are intrinsic to the implementation.

A service may support creation or modification of ClassOfService resources. All must be consistent with the capabilities of the service.

**6.5.4.4 The StoragePool resource** When a Swordfish implementation advertises support for the Class of Service feature, the StoragePool resource now presents a new method to the client to allocate unassigned storage capacity. This is automated by the system as conformance to one or more classes of service. Requests to StoragePool shall automatically allocate capacity based on the constraints of the selected class of service and any other selected parameters, with priority given to the class of service constraints.

The following are the principal properties of StoragePool that are used to identify resources provisioned or supported by the storage pool related to Class of Storage:

- ClassesOfService: A reference to a resource collection that specifies the set ClassOfService resources that can be specified when provisioning resources from the storage pool.
- DefaultClassOfService: A reference to the default ClassOfService resources used for provisioning from the storage pool.
- **6.5.4.5 The Volume resource** Volume resource represents a block-addressable container of storage, sometimes referred to as a "Logical Unit", "LU", "LUN", or "StorageVolume" in the storage industry. Volumes optionally adhere to a ClassOfService, which defines added functionality. Examples include:
  - Access capabilities

- Capacity and capacity sources
- Consumption tracking (e.g., LowSpaceWarningThresholdPercents)
- Replication details
- StorageGroup Information

**6.5.4.6 The FileSystem resource** In a Swordfish implementation that advertises support for the Class of Service feature, File systems represent file-addressable capacity that are conformant to a ClassOfService.

### 7 Schema Considerations

#### 7.1 Schema Introduction

#### 7.1.1 Overview

A Swordfish implementation is a Redfish implementation, and as such it minimally includes support for some Redfish-defined schema, including ServiceRoot, ComputerSystem, and Storage (which has been enhanced to include many Swordfish-centric properties). Swordfish implementations also include support for Swordfish-defined schema.

The Swordfish model focuses primarily on the logical model of a storage system, and does not require full representation of a physical instantiation. This is left to the implementer to complete from available Redfish schema models.

Swordfish schema is conformant with the rules used to define Redfish schema. Redfish schema is conformant with the Common Schema Definition Language, see CSDL. This section provides additional definition and context for the CSDL elements used to define Swordfish schema.

### 7.1.2 Schema Primacy

Redfish and Swordfish schema are made available in multiple formats, including CSDL, JSON and yaml. The development source for the Swordfish specification is CSDL; other variants are derived from the CSDL source. If conflicts and questions arise between the definitions, CSDL shall be treated as the definitive source.

#### 7.1.3 Swordfish Extension of the Redfish ServiceRoot

The Redfish ServiceRoot has properties that provide access to Swordfish resources.

XXX - ADD EMERGING TECHNOLOGY TAG.

For implementations that advertise support for the ClassOfService feature, the implementation shall instantiate a collection of StorageServicesat the ServiceRoot with at least one member. The collection provides the client an efficient means to search across all StorageService resources, regardless of which ComputerSystem is supporting the service.

### 7.2 Default values and NULLABLE attributes

The interaction of Nullable and DefaultValue needs to be clearly understood by both implementers and client developers. The possible combinations of are summarized in Table 7. The table contains:

- Nullable: True, if a given property may be NULL
- **DefaultValue**: True, if a default value is provided for a given property
- **Client**: True, if a client value is supplied for a given property in a query or response
- **Result**: The resultant value of the given property. One of:
  - C: The client-provided value
  - D: The default value
  - Null: Null
  - I: Implementation defined
  - Error: Error state

Table 7: Schema annotations

Nullable	DefaultValue	Client	Value
T	Т	Т	С
Т	Т	F	D
Т	F	Т	С
Т	F	F	I or Null
F	Т	Т	С
F	T	F	D
F	F	Т	С
F	F	F	I or Error

#### 7.3 Common schema annotations

Table 8 lists common annotation used in the definition of Swordfish, for details see OData Capabilities Vocabulary, OData Core Vocabulary, OData Measures Vocabulary, and Redfish Extensions.

Table 8: Default and Nullable Interaction

Name	Applies to	Description
AllowableValues	Parameter	The set of allowable values for a parameter
AutoExpand	NavigationProperty	If true, return expand th target element
AutoExpandReferences	NavigationProperty	If true, return references to the target element
ConformanceLevel	EntityContainer	Specifies OData conformance level
Deprecated	All	Specifies that the element may be removed in future major revisions, but shall continue to be supported as specified if the current revision.
Description	All	A brief description of a model element
LongDescription	All	A normative description of a model element
Maximum	Parameter, Property	Maximum value that an integer property or parameter may have
Minimum	Parameter, Property	Minimum value that an integer property or parameter may have
Pattern	Parameter, Property	Specifies a pattern that the value shall match
Permissions	NavigationProperty, Property	Access permission for the property.

Name	Applies to	Description
Required	NavigationProperty, Property	If true, property is required to be supported by the service. The default is optional. See Required Properties
RequiredOnCreate	NavigationProperty, Property	If true, property is required on creation. See <i>Required Properties</i>
Unit	Property	The unit of measure for the value.

### 7.4 Property implementation requirements

The client and the implementer should understand that, regardless of the schema declaration, an implementer may choose to not implement a property. If not implemented, a representation of the property will not be present in a reply. This should not be confused with a response that indicates that a property has been implemented, but has no value (i.e. *propertyName = null*).

There are several factors that could affect the implementation choice. Implementation requirements can be defined in many documents. At a minimum, a developer should review, in order: 1. the Redfish specification, 2. this document, and 3. associated profile specifications.

### 7.5 Schema repository

The primary online source for the Swordfish schema shall be co-located on the DMTF schema site with the Redfish schema: http://redfish.dmtf.org/schemas/swordfish/v1 Developers may also download the schema as part of the Swordfish bundle from snia.org (refer to snia.org/swordfish for pointers to the bundle locations).

Implementations should refer either to the versions available on the dmtf.org site or to locally provided instances of the schema.

### 7.6 Referencing other schemas

Swordfish directly references many Redfish schemas when functionality is already defined and can be leveraged. Other Redfish schema may be added by inference or directly to implementations. Examples are available in the Swordfish mockups.

### 7.7 Swordfish online repositories

### 7.7.1 Registries

The primary online source for the Swordfish registries shall be co-located on the DMTF registry site with the Redfish registry: http://redfish.dmtf.org/registries/swordfish/v1 Developers may also download the schema as part of the Swordfish bundle from snia.org (refer to snia.org/swordfish for pointers to the bundle locations).

Implementations should refer either to the versions available on the dmtf.org site or to locally provided instances of the registries.

#### 7.7.2 Profiles

The primary online source for the Swordfish registries shall be co-located on the DMTF profile site with the Redfish profile: http://redfish.dmtf.org/profiles/swordfish/v1

Developers may also download the profiles as part of the Swordfish bundle from snia.org (refer to snia.org/swordfish for pointers to the bundle locations).

Implementations should refer either to the versions available on the dmtf.org site or to locally provided instances of the profiles.

# 8 Implementation requirements

### 8.1 Security

This document generally adheres to the security requirements defined in the Redfish Specification. It extends the Redfish security model in one important way:

Swordfish implementations shall implement TLS as per the guidance in ISO/IEC 20648 and the TLS Specification for Storage Systems.

#### 8.2 General constraints

#### 8.2.1 Redfish elements

The Swordfish service interface extends the Redfish service interface. As such, a Swordfish service is a Redfish service and all required elements of the Redfish model shall be present in a Swordfish model.

A Swordfish implementation shall conform to all requirements specified in the Redfish specifications.

Swordfish functionality shall not conflict with any previously defined Redfish functionality but it may add to or extend it, and it may add additional constraints on Redfish functionality.

Additionally, any functionality desired in a Swordfish implementation that is specified in Redfish shall follow the requirements as specified in the Redfish specification.

#### 8.2.2 Storage Events

**8.2.2.1 Overview** A Swordfish implementation should implement an event service. Redfish defines the Event Service framework, client subscription model, event delivery mechanism, as well as standard message registries. Swordfish extends the standard message registries to provide additional message registries that correspond to Swordfish-specific services and properties.

The Redfish event service publishes a list of event types supported, and maintains a list of clients that have subscribed. Each subscription maps clients, subscribed events, and the resources that generate them.

**8.2.2.2 Message Registry Selection and Management** Swordfish constrains the existing event model to provide a more consistent handling of event notifications and the related messages, in order to assure that client systems can easily and consistently parse and respond to system-level events.

#### 8.2.2.3 Required Usage

- The Resource Event Message Registry defines the underlying messaging model, and shall be used to map messages to resources for storage implementations.
- The Redfish Base Message Registry shall be used to support HTTP connection/error/protocol issues, and general errors.
- The Swordfish Message Registry shall be used as a supplement for the resource event message registry.
- If the Swordfish service implements Redfish tasks (i.e., long-running operations), the implementation shall use the messages defined in the Task Event Message Registry to report status.

#### 8.2.2.4 Recommended Usage

- Standard Messages should be used, wherever possible.
- OEM messages should be avoided. Suggestions for clarification or expansion of the existing registries are encouraged. (submissions should be sent to the SNIA Feedback Portal)

### 8.2.3 Health and HealthRollup Propagation

- **8.2.3.1 Overview** The Status object includes both a Health property, intended to reflect the health of a given resource or component in a standardized way, and a HealthRollup property, which is meant to aggregate the health of a hierarchy of subordinate or associated resources or components. Swordfish introduces some additional guidance around the proper use of these two properties.
- **8.2.3.2 Status.Health** The Redfish schema requires that Status.Health "represent the health state of the resource without considering its dependent resources." While Swordfish defines no change to that usage, implementors are encouraged to assure that the information reflected in Status.Health reflects solely the state of the reporting object. For example, a given StoragePool instance can report OK for its own Status.Health, even if a volume is reporting a Status.Health value

of Critical because it has exceeded a space quota and been taken offline, as the storage pool itself has no issues.

**8.2.3.3 Status.HealthRollup** The Redfish schema requires that Status. HealthRollup "represent the health state of the resource and its dependent resources". As a general rule, Status. HealthRollup is intended to aggregate any error conditions found in subordinate levels in a hierarchy of components or subsystems, and allow a client to traverse the hierarchy to locate the underlying source of a problem or error state. At the same time, an implementation should not blindly retain the severity of a component-level problem, when higher-level objects or systems provide additional protection against serious failure or data loss. Accordingly:

- Status. HealthRollup shall represent the general health of the reporting resource and its dependent resources, and shall not report an value of OK if the status. health value of any dependent resource reports a value other than OK;
- Status. HealthRollup should propagate a lower-level error status and its severity, particularly if the reporting resource doesn't introduce additional redundancy or error protection;
- Status. HealthRollup may report a lower level of severity than that returned by Status. Health of one of its dependent resources, provided that the ability to traverse the resource hierarchy to the root cause of a subordinate error is preserved. In particular, while a Status. Health value of Critical may be downgraded to Warning, a Warning value should not be downgraded to OK, as the ability to locate the root cause the subordinate error would be lost.

### 8.3 Discovering Swordfish resources

Each Swordfish implementation supports the following well-known URLs, as defined in Redfish. Specifically:

- /Redfish, which contains one or more version properties for the integrated Swordfish and Redfish implementation, starting with v1.
- /Redfish/v1, which addresses a ServiceRoot instance, which defines
  the Redfish default principal starting information for version 1 implementation
  of an integrated Redfish and Swordfish service. A GET operation to it shall retrieve the value of an instance of a ServiceRoot EntityType as defined in
  the ServiceRoot v1.xml file.

- /Redfish/v1/\$metadata, an OData metadata document containing descriptions of all top-level service resources and resource types used in the implementation.
   \$metadata contains a list of all the current schema instrumented in the service.
   Clients querying the \$metadata URI will get a comprehensive view of all implemented schema.
- /Redfish/v1/odata, which addresses a ServiceContainer instance, which defines OData conformant principal starting information for the same version1implementation of an integrated Redfish and Swordfish service. A GET operation shall retrieve the value of an instance of a ServiceContainer EntityContainer as defined in the ServiceRoot\_v1.xml file.

Note: Since the ServiceContainer is required to return an @odata.context value of /redfish/v1, all other elements accessed via it will be the same elements found via the ServiceRoot.

A Swordfish service is a Redfish service with extensions to support storage management. No additional service entry-points are required by Swordfish.

Both the ServiceRoot and ServiceContainer provide access to the same resource collections. The ServiceContainer additionally has a Service attribute that references the ServiceRoot resource. Regardless of starting point, the property values of the ServiceRoot instance enable navigation to all other resources exposed by the Swordfish service.

### 8.3.1 Required Collections for Storage implementations

Swordfish implementations shall include the use of either Storage or Storage-Service objects.

If an implementation contains a Storage instance, the redfish/v1/Storage collection shall be implemented, and shall contain references to all Storage objects. This collection may also contain the primary instances of Storage objects.

If an implementation contains a Storage Service instance, the redfish/v1/Storage Services collection shall be implemented, and contain references to all Storage Service objects. This collection shall serve as the primary collection to contain Storage Service instances.

### 8.4 ClassOfService requirements

Each ClassOfService shall include at least one line of service. The providing server shall assure that the line of service values of a ClassOfService collectively represent a supported choice of service.

# 8.5 HTTP status codes

#### 8.5.1 Overview

Status codes are generally defined as part of the general HTTP protocol definition. In addition, the Redfish specification calls out general usage for HTTP status codes. This section provides additional usage guidance and constraints for Swordfish implementations.

In some instances, Redfish and Swordfish expand the standard use of HTTP status codes by associating additional system status with specific status codes. In addition, error response data may be included via standardized message registry entries. The specific messaging requirements will be defined in the following sections.

In cases where Swordfish adds additional constraints or expands on the Redfish handling of a given issue, this document will include a small wording extract from the Redfish specification for additional context. For example:

Swordfish refines the requirements in the *Redfish Specification*: Redfish has no constraint on external storage functionality to require that all references to external storage functionality shall be compliant with the current release of Swordfish.

#### 8.5.2 Create

If a request to create a resource can be completed successfully without additional time, the Redfish service shall return a status code of 201, and the body of the response shall contain the JSON representation of the newly created resource.

If the create resource request has been accepted, but no information about the resource can be returned at this point, the Redfish service shall return a status code of 204. The payload of the response shall be empty, but the Location header shall contain the resource URI. The client will be required to poll the appropriate resource to determine both when and if the operation is complete.

Swordfish refines the requirements in of the *Redfish Specification* (see "Data modification requests overview" and "Asynchronous operations").

If a request to create a resource cannot be completed without additional time, the implementation shall:

- Populate an initial object. It shall contain, at a minimum, a valid URI, required properties (e.g., ID, name), and Status. State;
- Set Status. State of the partially populated resource to "Creating";
- Return the appropriate status code, based on the following guidance:
  - If a Task Service has been implemented, the Redfish service shall return a status code of 202, with the Location header set to the URI of the Task Monitor. Once the provider has returned a Task Monitor to the client, the Client can then query the provided task URI to track the task completion status. Upon task completion, a GET against the task monitor may return a status code of 201, and the body of the message shall contain the created resource, provided the task monitor URI remains valid. Refer to the Redfish Task Manager documentation for the lifecycle of the task monitor URI.
  - If a Task Service has not been implemented, the Redfish service shall return a status code of 201, and the body of the response shall contain the URI of the skeletal resource created as part of accepting the request. The client will be required to poll the URI provided to determine when the operation is complete.
- Update Status. State for the object, once the create operation completes.

### 8.5.3 Update, Replace, Delete

If a request to modify or delete a resource can be completed without additional time, the Redfish service shall return a status code of 200, and the body of the response shall contain the JSON representation of the modified (or deleted) resource.

If the resource modification or deletion request has been accepted, but no information about the resource can be returned at this point, the Redfish service shall return a status code of 204. The payload of the response shall be empty. The client will be required to poll the appropriate collection to determine both when and if the operation is complete.

If a request to modify a resource cannot be completed without additional time, the implementation shall:

- Set Status. State of the partially populated resource to "Updating" or "Deleting", as appropriate;
- Return the appropriate status code, based on the following guidance:
- If a Task Service has been implemented, the Redfish service shall return a status code of 202, with the Location header set to the URI of the Task Monitor. Once the provider has returned a Task Monitor to the client, the Client can then query the provided task URI to track the task completion status. Upon task completion, a GET against the task monitor may return a status code of 201, and the body of the message shall contain the created resource, provided the task monitor URI remains valid. Refer to the Redfish Task Manager documentation for the lifecycle of the task monitor URI.
- If a Task Service has not been implemented, the Redfish service shall return a status code of 200, and the body of the response shall contain the URI of the skeletal resource created as part of accepting the request. The client will be required to poll the URI provided to determine when the operation is complete.
- For an update or replace request, the implementation shall update Status. State for the resource, once the modify operation completes.

#### 8.5.4 Actions

Swordfish supports the approach to Actions in the *Redfish Specification*:

Actions are Redfish operations that do not easily map to RESTful interface semantics. These types of operations may not directly affect properties in the Redfish Resources.

Swordfish refines the requirements in the *Redfish Specification*: Services shall support the POST method to send actions to Resources.

If a Task Service has been implemented, the Redfish service shall return a status code of 202, with the Location header set to the URI of the Task Monitor. Once the provider has returned a Task Monitor to the client, the Client can then query the provided task URI to track the task completion status. Once the task has completed successfully, a GET against the task monitor shall return the created object.

If a Task Service has not been implemented, the Redfish service shall return a status code of 200, and the body of the response shall contain the URI of the skeletal resource created as part of accepting the request. The client will be required to poll the URI provided to determine when the operation is complete. When processing actions, the handling of HTTP status codes is slightly different than that seen when processing CREATE or MODIFY requests. The HTTP status code is used to reflect the acceptance and formatting of the request. The outcome of any requested processing is reflected in the body of the returned message and its associated Error response structure. For example, a properly formatted request to execute a system reset may return an HTTP status code of 200 (OK), to reflect that the request has been received, was validly formatted, and has been accepted for processing, while the reset of the system may not complete successfully. The Error response structure would contain further detail of the success of failure of the system reset. The implementation must check both the HTTP status code and the underlying Error response message structure to confirm the successful execution of the action.

# 9 Swordfish type definitions

#### 9.1 Overview

The following sections define the schema and type definitions that make up a Sword-fish implementation. Each data type or entity within the schema includes a description that defines its implementation requirements and their interaction.

### 9.2 Introduction

### 9.3 Universal properties

The properties summarized in Table 9 are defined for inclusion in every Redfish schema, and therefore may be encountered in any response payload. They are documented here to avoid repetition in the property tables. Note that several of these properties are payload annotations, but appear here because they are required for all Redfish and Swordfish Resources.

#### 9.3.0.1 Properties

Table 9: Universal properties

Prope		Attri	
rty	Type	butes	Notes
@od ata.c ontex t	strin g (URI)	read -only	The value of this property shall be the context URL that describes the resource according to OData-Protocol and shall be of the form defined in the Redfish specification.
@od ata.e tag	strin g	read -only	The value of this property shall be a string that is defined by the ETag HTTP header definition in RFC7232.
@od ata.i d	strin g (URI)	read -only requi red	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.

Prope		Attri	
rty	Туре	butes	Notes
@od ata.t ype	strin g	read -only requi red	The value of this property shall be a URI fragment that specifies the type of the resource and it shall be of the form defined in the Redfish specification.
Des cript ion	strin g	read -only	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
**Id	strin g	read -only requi red	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Nam e	strin g	read -only requi red	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	objec t		The manufacturer- or provider-specific extension moniker that divides the Oem object into sections.

# 9.4 Frequently used properties

In addition, the properties summarized in Table 10 are frequently defined in Redfish schemas. Their definition and usage is the same throughout the Redfish data model.

# 9.4.0.1 Properties

Table 10: Frequent properties

Prope		Attri	
rty	Type	butes	Notes
**Act ions {}	objec t		The Redfish actions available for this Resource.

Prope		Attri	
rty	Туре	butes	Notes
Lin ks {}	objec t		The links associated with the Resource, as defined by that Resource's schema definition.  All associated reference properties defined for a Resource are nested under the Links property.  Find all directly referenced, or subordinate, Resource properties from the root of the Resource.
Rel atedI tem [ {	array		An array of links. Each link points to a Resource or part of a Resource as defined by that Resource's schema. This representation is not intended to be a strong linking methodology like other references. Instead, it shows a relationship between elements or subelements in disparate parts of the service. For example, fans might be in one area of the system and processors in another. The relationship between the two might not be obvious. This property can show that one is related to the other. In this example, it might indicate that a specific fan cools a specific processor.
<b>@o</b> data. id	strin g (URI)	read -only	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.

# 9.5 Common Swordfish Objects

The following structures are included in multiple Swordfish schema, and therefore may be encountered in any Response payload. They are documented here to avoid repetition in the Swordfish Specification tables for each schema.

## 9.5.1 Capacity

**9.5.1.1 Description** This composition may be used to represent storage capacity. The sum of the values in Data, Metadata, and Snapshot shall be equal to the total capacity for the data store.

**9.5.1.2 Properties** The properties defined for the Capacity schema are summarized in Table 11.

Table 11: Capacity properties

		Attribu	
Property	Туре	tes	Notes
Data {}	object		The value shall be capacity information relating to provisioned user data. For property details, see CapacityInfo.
IsThinProvisioned	boolean	read-o nly (null)	If the value is false, the capacity shall be fully allocated. The default value shall be false.
Metadata {}	object		The value shall be capacity information relating to provisioned system (non-user accessible) data. For property details, see CapacityInfo.
Snapshot {}	object		The value shall be capacity information relating to provisioned snapshot or backup data. For property details, see CapacityInfo.

## 9.5.2 CapacityInfo

**9.5.2.1 Description** This composition may be used to represent the utilization of storage capacity.

**9.5.2.2 Properties** The properties defined for the CapacityInfo schema are summarized in Table 12.

Table 12: CapacityInfo properties

Property	Type	Attribu tes	Notes
AllocatedBytes	integer (By)	read-w rite(null)	The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.
ConsumedBytes	integer (By)	read-o nly (null)	The value shall be the number of logical bytes currently consumed in this data store for this data type.
GuaranteedBytes	integer (By)	read-w rite(null)	The value shall be the number of bytes the storage system guarantees can be allocated in this data store for this data type.
ProvisionedBytes	integer (By)	read-w rite(null)	The value shall be the maximum number of bytes that can be allocated in this data store for this data type.

#### 9.5.3 Identifier

**9.5.3.1 Description** This type shall contain any additional identifiers for a resource.

**9.5.3.2 Properties** The properties defined for the Identifier schema are summarized in Table 13.

Table 13: Identifier properties

		Attribu	
Property	Туре	tes	Notes
DurableName (v1.1+)	string	read-o nly (null)	This property shall contain the world-wide unique identifier for the resource. The string shall be in the Identifier.DurableName Format property value format.
<b>DurableNameFormat</b> (v1.1+)	string (enum)	read-o nly (null)	This property shall represent the format of the DurableName property. For the possible property values, see DurableNameFormat in Property details.

## 9.5.3.3 Property details

**9.5.3.3.1 DurableNameFormat** The defined property values are listed in Table 14. This property shall represent the format of the DurableName property.

 Table 14: DurableNameFormat property values

string	Description
EUI	This durable name shall contain the hexadecimal representation of the IEEE-defined 64-bit Extended Unique Identifier (EUI), as defined in the IEEE's Guidelines for 64-bit Global Identifier (EUI-64) Specification. The DurableName property shall follow the regular expression pattern ^ ([0-9A-Fa-f]{2}[:-]){7}([0-9A-Fa-f]{2})\$, where the most significant octet is first.
FC_WWN	This durable name shall contain a hexadecimal representation of the World-Wide Name (WWN format, as defined in the T11 Fibre Channel Physical and Signaling Interface Specification. The DurableName property shall follow the regular expression pattern $^([0-9A-Fa-f]{2}[:-]){7}([0-9A-Fa-f]{2})$ , where the most significant octet is first.
GCXLID (v1.15+)	This durable name shall be in the globally unique CXL logical device identifier (GCXLID). The DurableName property shall follow the regular expression pattern ^ ([0-9A-Fa-f]{2}-){7}[0-9A-Fa-f]{2}:([0-9A-Fa-f]{4})\$, where the first eight hyphen-delimited octets contain the PCIe serial number, where the most significant octet is first, and the remaining 16-bit field contains the CXL Logical Device Identifier, with the most significant byte first.
iQN	This durable name shall be in the iSCSI Qualified Name (iQN) format, as defined in RFC3720 and RFC3721.

string	Description
MACAddress (v1.14+)	This durable name shall be a media access control address (MAC address), which is a unique identifier assigned to a network interface controller (NIC) for use as a network address. This value should not be used if a more specific type of identifier is available. The DurableName property shall follow the regular expression pattern ^ ([0-9A-Fa-f]{2}[:-]) {5} ([0-9A-Fa-f]{2}) \$, where the most significant octet is first.
NAA	This durable name shall contain a hexadecimal representation of the Name Address Authority structure, as defined in the T11 Fibre Channel Framing and Signaling - 3 (FC-FS-3) specification. The DurableName property shall follow the regular expression pattern $((0-9A-Fa-f)\{2\})\{8\})\{1,2\}$ , where the most significant octet is first.
NGUID (v1.10+)	This durable name shall be in the Namespace Globally Unique Identifier (NGUID), as defined in the NVN Express Specification. The DurableName property shall follow the regula expression pattern  ^([0-9A-Fa-f]{2}){16}\$, where the most significant octet is first.
NQN (v1.6+)	This durable name shall be in the NVMe Qualified Name (NQN) format, as defined in the NVN Express over Fabric Specification.
NSID (v1.6+, deprecated v1.12)	This durable name shall be in the NVM Namespace Identifier (NSID) format, as defined in the NVN Express Specification. Deprecated in v1.12 and later. This value has been deprecated due to its non-uniqueness and NGUID should be used.

string	Description
UUID	This durable name shall contain the
	hexadecimal representation of the UUID, as
	defined by RFC4122. The DurableName
	property shall follow the regular expression
	pattern "([0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-
	9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA- F]{12})".

## 9.5.4 IOStatistics

**9.5.4.1 Description** The properties of this type shall be used to represent the IO statistics of the requested object.

**9.5.4.2 Properties** The properties defined for the IOStatistics schema are summarized in Table 15.

**Table 15:** IOStatistics properties

		A., 'I	
		Attribu	
Property	Туре	tes	Notes
NonIORequests	integer ({tot})	read-w rite(null)	The value shall represent the total count from the time of last reset or wrap of non IO requests.
NonIORequestTime	string	read-w rite (null)	The value shall be an ISO 8601 conformant duration describing the time that the resource is busy processing non IO requests from the time of last reset or wrap.
ReadHitIORequests	integer ({tot})	read-w rite(null)	The value shall represent the total count from the time of last reset or wrap of read IO requests satisfied from memory.

_	_	Attribu	
Property	Туре	tes	Notes
ReadIOKiBytes	integer (KiBy)	read-w rite(null)	The value shall represent the total number of kibibytes read from the time of last reset or wrap.
ReadIORequests	integer ({tot})	read-w rite(null)	The value shall represent the total count from the time of last reset or wrap of read IO requests satisfied from either media or memory (i.e. from a storage device or from a cache).
ReadIORequestTime	string	read-w rite (null)	The value shall be an ISO 8601 conformant duration describing the time that the resource is busy processing read requests from the time of last reset or wrap.
Write Hit I O Requests	integer ({tot})	read-w rite(null)	The value shall represent the total count from the time of last reset or wrap of write IO requests coalesced into memory.
WritelOKiBytes	integer (KiBy)	read-w rite(null)	The value shall represent the total number of kibibytes written from the time of last reset or wrap.
Write IOR equests	integer ({tot})	read-w rite(null)	The value shall represent the total count from the time of last reset or wrap of write IO requests.

		Attribu	
Property	Type	tes	Notes
WriteIORequestTime	string	read-w rite (null)	The value shall be an ISO 8601 conformant duration describing the time that the resource is busy processing write requests from the time of last reset or wrap.

## 9.5.5 IOWorkload

**9.5.5.1 Description** This structure may be used to describe an IO Workload.

**9.5.5.2 Properties** The properties defined for the IOWorkload schema are summarized in Table 16.

Table 16: IOWorkload properties

		Attribu	
Property	Туре	tes	Notes
Components [ { } ]	array (object)	* (null) *	The value shall be an array of IO workload component descriptions. For property details, see IOWorkloadComponent.

	_	Attribu	
Property	Туре	tes	Notes
Name	string	read-w	The value shall be a name
		rite (null)	of the workload. It should
			be constructed as
			OrgID:WorkloadID.
			Examples: ACME:DSS,
			ACME:DSS-REP,
			ACME:Exchange,
			ACME:OLTP,
			ACME:OLTP-REPA. An
			organization may define a
			set of well known
			workloads.

## 9.5.6 IOWorkloadComponent

**9.5.6.1 Description** This structure may be used to describe a component of an IO workload.

**9.5.6.2 Properties** The properties defined for the IOWorkloadComponent schema are summarized in Table 17.

**Table 17:** IOWorkloadComponent properties

		Attribu	
Property	Туре	tes	Notes
AveragelOBytes	integer (By)	read-w rite(null)	The value shall be the expected average I/O size.

		Attribu	
Property	Type	tes	Notes
Duration	string (s)	read-w rite(null)	The value of each entry shall be an ISO 8601 duration that shall specify the expected length of time that this component is applied to the workload. This attribute shall be specified if a schedule is specified and otherwise shall not be specified.
IOAccessPattern	string (enum)	read-w rite(null)	The enumeration literal shall be the expected access pattern. For the possible property values, see IOAccessPattern in Property details.
PercentOfData	integer (%)	read-w rite(null)	The value shall be the expected percent of the data referenced by the workload that is covered by this component.
PercentOfiOPS	integer (%)	read-w rite(null)	The value shall be the expected percent of the total IOPS for this workload that is covered by this component.
Schedule {}	object		The value shall specifies when this workload component is applied to the overall workload. For property details, see Schedule v1.2.4).

## 9.5.6.3 Property details

**9.5.6.3.1 IOAccessPattern** The defined property values are listed in Table 18. The enumeration literal shall be the expected access pattern.

Table 18: IOAccessPattern property values

string	Description
RandomReadAgain	Use of this enumeration literal shall indicate an access pattern of random reads of cached data.
RandomReadNew	Use of this enumeration literal shall indicate an access pattern of random reads of uncached data.
ReadWrite	Use of this enumeration literal shall indicate a Uniform distribution of reads and writes.
SequentialRead	Use of this enumeration literal shall indicate a sequential read pattern of access.
SequentialWrite	Use of this enumeration literal shall indicate a sequential write pattern of access.

### 9.5.7 Location

**9.5.7.1 Description** This type shall describe the location of a resource.

**9.5.7.2 Properties** The properties defined for the Location schema are summarized in Table 19.

Table 19: Location properties

		Attribu	
Property	Туре	tes	Notes
AltitudeMeters (v1.6+)	number (m)	read-w rite(null)	This property shall contain the altitude of the resource, in meter units, defined as the elevation above sea level.
<b>Contacts</b> (v1.7+) [ {	array		This property shall contain an array of contact information for an individual or organization responsible for this resource.
ContactName (v1.7+)	string	read-w rite (null)	This property shall contain the name of a person or organization to contact for information about this resource.
EmailAddress (v1.7+)	string	read-w rite (null)	This property shall contain the email address for a person or organization to contact for information about this resource.
PhoneNumber (v1.7+)	string	read-w rite (null)	This property shall contain the phone number for a person or organization to contact for information about this resource.

}]

		Attribu	
Property	Туре	tes	Notes
Info (v1.1+, deprecated v1.5)	string	read-o nly (null)	This property shall represent the location of the resource. Deprecated in v1.5 and later. This property has been deprecated in favor of the PostalAddress, Placement, and PartLocation properties.
InfoFormat (v1.1+, deprecated v1.5)	string	read-o nly (null)	This property shall represent the Info property format.  Deprecated in v1.5 and later. This property has been deprecated in favor of the PostalAddress,  Placement, and  PartLocation properties.
Latitude (v1.6+)	number (deg)	read-w rite(null)	This property shall contain the latitude of the resource specified in degree units using a decimal format and not minutes or seconds.
Longitude (v1.6+)	number (deg)	read-w rite(null)	This property shall contain the longitude of the resource specified in degree units using a decimal format and not minutes or seconds.

		Attribu	
Property	Туре	tes	Notes
Oem (v1.1+) {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
PartLocation (v1.5+) {	object		This property shall contain the part location for a resource within an enclosure. This representation shall indicate the location of a part within a location specified by the Placement property.
LocationOrdinalValue (v1.5+)	integer	read-o nly (null)	This property shall contain the number that represents the location of the part based on the LocationType. LocationOrdinalValue shall be measured based on the Orientation value starting with 0.
LocationType (v1.5+)	string (enum)	read-o nly (null)	This property shall contain the type of location of the part. For the possible property values, see LocationType in Property details.

		Attribu	
Property	Туре	tes	Notes
Orientation (v1.5+)	string (enum)	read-o nly (null)	This property shall contain the orientation for the ordering used by the LocationOrdinalValue property. For the possible property values, see Orientation in Property details.
Reference (v1.5+)	string (enum)	read-o nly (null)	This property shall contain the general location within the unit of the part. For the possible property values, see Reference in Property details.
ServiceLabel (v1.5+)	string	read-o nly (null)	This property shall contain the label assigned for service at the part location.

89

		Attribu	
Property	Туре	tes	Notes
**PartLocationContext	string	read-o nly	This property shall
(v1.16+)		(null)	contain a
			human-readable string to
			enable differentiation
			between PartLocation
			values for parts in the
			same enclosure, which
			may include hierarchical
			information of containing
			PartLocation values for
			the part. The value of this
			property shall not include
			values of the PartLocation
			properties for the part
			itself. The purpose of this
			value, in conjunction with
			the PartLocation of the
			part itself, is to allow
			clients to determine the
			physical location of the
			part without tracing
			through the PartLocation
			of multiple resources.

		Attribu	
Property	Type	tes	Notes
PhysicalAddress (v1.17+) {	object		This property shall contain a physical address for a resource. This property should be present for resources that represent physical objects that can operate without requiring physical containment by another resource. For example, a server chassis might be contained by a rack, but it might also be deployed individually, while a drive is always contained by a chassis and therefore is described by the containing resource.
<b>City</b> (v1.17+)	string	read-w rite (null)	This property shall contain the city, township, or shi (JP) location for this resource.
<b>Country</b> (v1.17+)	string	read-w rite (null)	This property shall contain the country location for this resource.
ISOCountryCode (v1.17+)	string	read-w rite (null)	This property shall contain the ISO 3166-1-defined alpha-2 or alpha-3 country code.  Pattern: ^([A-Z]{2} [A-Z]{3})\$

		Attribu	
Property	Type	tes	Notes
ISOSubdivisionCode (v1.17+)	string	read-w rite (null)	This property shall contain the ISO 3166-2-defined state, province, or territory subdivision code for this resource. Pattern:  ^[A-Z0-9]{1,3}\$
PostalCode (v1.17+)	string	read-w rite (null)	The property shall contain the postal code for this resource. The value shall conform to the RFC5139-defined requirements of the PC field.
StateOrProvince (v1.17+)	string	read-w rite (null)	This property shall contain the state, province, or territory location within the country for this resource.
StreetAddress (v1.17+)	string	read-w rite (null)	This property shall contain the street-level physical address of the resource, including identifiers such as apartment, room, or building to further locate the resource within a given street address.
} Placement (v1.3+) {	object		This property shall
1 7 0	,		contain a place within the addressed location.

		Attribu	
Property	Туре	tes	Notes
AdditionalInfo (v1.7+)	string	read-w rite (null)	This property shall contain additional information, such as Tile, Column (Post), Wall, or other designation that describes a location that cannot be conveyed with other properties defined for the Placement object.
Rack (v1.3+)	string	read-w rite (null)	This property shall contain the name of the rack within a row.
RackOffset (v1.3+)	integer	read-w rite (null)	The vertical location of the item in the rack. Rack offset units shall be measured from bottom to top, starting with 0.
RackOffsetUnits (v1.3+)	string (enum)	read-w rite(null)	This property shall contain a RackUnit enumeration literal that indicates the type of rack units in use. For the possible property values, see RackOffsetUnits in Property details.
<b>Row</b> (v1.3+)	string	read-w rite (null)	This property shall contain the name of the row.

		Attribu	
Property	Туре	tes	Notes
PostalAddress (v1.3+, deprecated v1.17) {	object		This property shall contain a postal address of the resource.  Deprecated in v1.17 and later. This object and its properties have been deprecated in favor of PhysicalAddress.
AdditionalCode (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the ADDCODE field.
AdditionalInfo (v1.7+)	string	read-w rite (null)	The value shall conform to the requirements of the LOC field as defined in RFC5139. Provides additional information.
Building (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the BLD field. Names the building
City (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the A3 field. Names a city, township, or shi (JP).
Community (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the PCN field. A postal community name.

		Attribu	
Property	Type	tes	Notes
<b>Country</b> (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the Country field.
District (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the A2 field. Names a county, parish, gun (JP), or district (IN).
Division (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the A4 field. Names a city division, borough, city district, ward, or chou (JP).
<b>Floor</b> (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the FLR field. Provides a floor designation.

Property	Type	Attribu tes	Notes
GPSCoords (v1.3+, deprecated v1.6)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the ADDCODE field. Shall contain the GPS coordinates of the location. If furnished, expressed in the [-] [nn] n.nnnnn format. For example, two comma-separated positive or negative numbers with six decimal places of precision.  Deprecated in v1.6 and later. This property has been deprecated in favor of the Longitude and Latitude properties.
HouseNumber (v1.3+)	integer	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the HNC field. The numeric portion of the house number.
HouseNumberSuffix (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the HNS field. Provides a suffix to a house number, (F, B, o 1/2).

		Attribu	
Property	Туре	tes	Notes
Landmark (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the LMK field. Identifies a landmark or vanity address.
LeadingStreetDirecti on (v1.3+)	string	read-w rite (null)	The value shall conform to the requirements of the PRD field as defined in RFC5139. Names a leading street direction, (N, W, or SE).
<b>Location</b> (v1.3+, deprecated v1.7)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the LOC field. Provides additional information. Deprecated in v1.7 and later. This property has been deprecated in favor of the AdditionalInfo property.
Name (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the NAM field. Names the occupant.
Neighborhood (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the A5 field. Names a neighborhood or block.

		Attribu	
Property	Туре	tes	Notes
PlaceType (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the PLC field. Examples include office and residence.
POBox (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the POBOX field. A post office box (PO box).
PostalCode (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the PC field. A postal code (or zipcode).
Road (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the RD field. Designates a primary road or street.
RoadBranch (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the RDB field. Shall contain a post office box (PO box) road branch.
RoadPostModifier (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the POM field. For example, Extended.

		Attribu	
Property	Туре	tes	Notes
RoadPreModifier (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the PRM field. For example, Old or New.
RoadSection (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the RDSEC field. A road section.
RoadSubBranch (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the RDSUBBR field.
Room (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the ROOM field. A name or number of a room to locate the resource within the unit.
<b>Seat</b> (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the SEAT field. A name or number of a seat, such as the desk cubicle, or workstation.
<b>Street</b> (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the A6 field. Names a street.

Property	Туре	Attribu tes	Notes
StreetSuffix (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the STS field. Names a street suffix.
Territory (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the A1 field when it names a territory, state, region, province, or prefecture within a country.
TrailingStreetSuffix v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the POD field. Names a trailing street suffix.
<b>Jnit</b> (v1.3+)	string	read-w rite (null)	The value shall conform to the RFC5139-defined requirements of the UNIT field. The name or number of a unit, such as the apartment or suite, to locate the resource.

## 9.5.7.3 Property details

**9.5.7.3.1 LocationType** The defined property values are listed in Table 20. This property shall contain the type of location of the part.

**Table 20:** LocationType property values

string	Description
Backplane (v1.12+)	This value shall indicate the part is a backplane in an enclosure.
Bay	This value shall indicate the part is located in a bay.
Connector	This value shall indicate the part is located in a connector or port.
Embedded (v1.13+)	This value shall indicate the part is embedded or otherwise permanently incorporated into a larger part or device. This value shall not be used for parts that can be removed by a user or are considered field-replaceable.
Slot	This value shall indicate the part is located in a slot.
Socket	This value shall indicate the part is located in a socket.

**9.5.7.3.2 Orientation** The defined property values are listed in Table 21. This property shall contain the orientation for the ordering used by the LocationOrdinalValue property.

Table 21: Orientation property values

string	Description
BackToFront	This value shall indicate the ordering for LocationOrdinalValue is back to front.
BottomToTop	This value shall indicate the ordering for LocationOrdinalValue is bottom to top.
FrontToBack	This value shall indicate the ordering for LocationOrdinalValue is front to back.
LeftToRight	This value shall indicate the ordering for LocationOrdinalValue is left to right.

101

string	Description
RightToLeft	This value shall indicate the ordering for LocationOrdinalValue is right to left.
TopToBottom	This value shall indicate the ordering for LocationOrdinalValue is top to bottom.

**9.5.7.3.3 RackOffsetUnits** The defined property values are listed in Table 22. This property shall contain a RackUnit enumeration literal that indicates the type of rack units in use.

**Table 22:** RackOffsetUnits property values

string	Description
EIA_310	Rack units shall conform to the EIA-310 standard.
OpenU	Rack units shall be specified in terms of the Open Compute Open Rack Specification.

**9.5.7.3.4 Reference** The defined property values are listed in Table 23. This property shall contain the general location within the unit of the part.

Table 23: Reference property values

string	Description
Bottom	This value shall indicate the part is in the bottom of the unit.
Front	This value shall indicate the part is in the front of the unit.
Left	This value shall indicate the part is on the left side of the unit.
Middle	This value shall indicate the part is in the middle of the unit.

string	Description
Rear	This value shall indicate the part is in the rear of the unit.
Right	This value shall indicate the part is on the right side of the unit.
Тор	This value shall indicate the part is in the top of the unit.

#### 9.5.8 Oem

**9.5.8.1 Description** This object represents the OEM properties. The resource values shall comply with the Redfish Specification-described requirements.

**9.5.8.2 Properties** The properties defined for the Oem schema are summarized in Table 24.

Table 24: Oem properties

		Attribu	
Property	Туре	tes	Notes
(pattern) {}	object		Property names follow regular expression pattern "^[A-Za-z0-9_]+\$"

## 9.5.9 Replicalnfo

**9.5.9.1 Description** The value shall define the characteristics of a replica.

**9.5.9.2 Properties** The properties defined for the ReplicaInfo schema are summarized in Table 25.

**Table 25:** Replicalnfo properties

		Attribu	
Property	Туре	tes	Notes
ConsistencyEnabled	boolean	read-o nly (null)	If true, consistency shall be enabled across the source and its associated target replica(s). The default value for this property is false.
ConsistencyState	string (enum)	read-o nly (null)	The ConsistencyState enumeration literal shall indicate the current state of consistency. For the possible property values, see ConsistencyState in Property details.
ConsistencyStatus	string (enum)	read-o nly (null)	The ConsistencyStatus enumeration literal shall specify the current status of consistency. Consistency may have been disabled or is experiencing an error condition. For the possible property values, see ConsistencyStatus in Property details.
ConsistencyType	string (enum)	read-o nly (null)	The ConsistencyType enumeration literal shall indicate the consistency type used by the source and its associated target group. For the possible property values, see ConsistencyType in Property details.

		Attribu	
Property	Туре	tes	Notes
DataProtectionLineOf Service (v1.1+) {	object		The value shall be a pointer to the data protection line of service that describes this replice. See the DataProtectionLineOfS ervice schema for details on this property.
@odata.id	string	read-w rite	Link to a  DataProtectionLineOfSe rvice resource. See the Links section and the DataProtectionLineOfS ervice schema for details.
FailedCopyStopsHostI O	boolean	read-o nly (null)	If true, the storage array shall stop receiving data to the source element if copying to a remote element fails. The default value for this property is false.
PercentSynced	integer (%)	read-o nly (null)	Specifies the percent of the work completed to reach synchronization.  Shall not be instantiated if implementation is not capable of providing this information. If related to a group, then  PercentSynced shall be an average of the  PercentSynced across all members of the group.

		Attribu		
Property	Туре	tes	Notes	
**RemoteSourceReplica (v1.4+)	string	read-o nly (null)	The ReplicaFaultDomain enumeration literal shall describe the fault domain (local or remote) of the replica relationship.	
Replica {	object		Deprecated - Use Source Replica. The value shall reference the resource that is the source of this replica.	
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.	
Replica Fault Domain	string	read-o nly	The ReplicaFaultDomain	
(v1.3+)	(enum)	(null)	enumeration literal shall describe the fault domain (local or remote) of the replica relationship. For the possible property values, see ReplicaFaultDomain in Property details.	

		Attribu	
Property	Туре	tes	Notes
ReplicaPriority	string (enum)	read-o nly (null)	The enumeration literal shall specify the priority of background copy engine I/O to be managed relative to host I/O operations during a sequential background copy operation. For the possible property values, see ReplicaPriority in Property details.
Replica Progress Status	string (enum)	read-o nly (null)	The ReplicaProgressStatus enumeration literal shall specify the status of the session with respect to Replication activity. For the possible property values, see ReplicaProgressStatus in Property details.
ReplicaReadOnlyAcces s	string (enum)	read-o nly (null)	The enumeration literal shall specify whether the source, the target, or both elements are read only to the host. For the possible property values, see ReplicaReadOnlyAccess in Property details.

		Attribu	
Property	Туре	tes	Notes
**ReplicaRecoveryMode	string (enum)	read-o nly (null)	The enumeration literal shall specify whether the copy operation continues after a broken link is restored. For the possible property values, see ReplicaRecoveryMode in Property details.
ReplicaRole	string (enum)	read-o nly (null)	The ReplicaRole enumeration literal shall represent the source or target role of this replica as known to the containing resource. For the possible property values, see ReplicaRole in Property details.
ReplicaSkewBytes	integer (By)	read-o nly (null)	Applies to Adaptive mode and it describes maximum number of bytes the SyncedElement (target) can be out of sync If the number of out-of-sync bytes exceeds the skew value, ReplicaUpdateMode shall be switched to synchronous.

		Attribu	
Property	Туре	tes	Notes
ReplicaState	string (enum)	read-o nly (null)	The ReplicaState enumeration literal shall specify the state of the relationship with respect to Replication activity. For the possible property values, see ReplicaState in Property details.
ReplicaType	string (enum)	read-o nly (null)	The ReplicaType enumeration literal shall describe the intended outcome of the replication. For the possible property values, see ReplicaType in Property details.
ReplicaUpdateMode	string (enum)	read-o nly (null)	The enumeration literal shall specify whether the target elements will be updated synchronously or asynchronously. For the possible property values, see ReplicaUpdateMode in Property details.

		Attribu	
Property	Туре	tes	Notes
RequestedReplicaStat e	string (enum)	read-o nly (null)	The last requested or desired state for the relationship. The actual state of the relationship shall be represented by ReplicaState. When RequestedState reaches the requested state, this property shall be null. For the possible property values, see RequestedReplicaState in Property details.
SourceReplica (v1.2+) {	object		The value shall contain the URI to the source replica when located on a different Swordfish service instance.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
SyncMaintained	boolean	read-o nly (null)	If true, Synchronization shall be maintained. The default value for this property is false.

		Attribu	
Property	Туре	tes	Notes
**UndiscoveredElement	string (enum)	read-o nly (null)	The enumeration literal shall specify whether the source, the target, or both elements involved in a copy operation are undiscovered. An element is considered undiscovered if its object model is not known to the service performing the copy operation. For the possible property values, see Undiscovered Element in Property details.
WhenActivated	string (%)	read-o nly (null)	The value shall be an ISO 8601 conformant time of day that specifies when the point-in-time copy was taken or when the replication relationship is activated, reactivated, resumed or re-established. This property shall be null if the implementation is no capable of providing this information.

		Attribu	
Property	Туре	tes	Notes
WhenDeactivated	string (%)	read-o nly (null)	The value shall be an ISO 8601 conformant time of day that specifies when the replication relationship is deactivated. Do not instantiate this property i implementation is not capable of providing this information.
WhenEstablished	string (%)	read-o nly (null)	The value shall be an ISO 8601 conformant time of day that specifies when the replication relationship is established. Do not instantiate this property i implementation is not capable of providing this information.
WhenSuspended	string (%)	read-o nly (null)	The value shall be an ISO 8601 conformant time of day that specifies when the replication relationship is suspended Do not instantiate this property if implementation is not capable of providing this information.
WhenSynced	string	read-o nly (null)	The value shall be an ISO 8601 conformant time of day that specifies when the elements were synchronized.

112

		Attribu	
Property	Туре	tes	Notes
WhenSynchronized	string (%)	read-o nly (null)	The value shall be an ISO 8601 conformant time of day that specifies when the replication relationship is synchronized. Do not instantiate this property if implementation is not capable of providing this information.

# 9.5.9.3 Property details

**9.5.9.3.1 ConsistencyState** The defined property values are listed in Table 26. The ConsistencyState enumeration literal shall indicate the current state of consistency.

**Table 26:** ConsistencyState property values

string	Description
Consistent	This enumeration literal shall indicate that the source and target shall be consistent.
Inconsistent	This enumeration literal shall indicate that the source and target are not required to be consistent.

**9.5.9.3.2 ConsistencyStatus** The defined property values are listed in Table 27. The ConsistencyStatus enumeration literal shall specify the current status of consistency. Consistency may have been disabled or is experiencing an error condition.

Table 27: ConsistencyStatus property values

string	Description
Consistent	This enumeration literal shall indicate that the source and target are consistent.
Disabled	This enumeration literal shall indicate that the source and target have consistency disabled.
InError	This enumeration literal shall indicate that the source and target are not consistent.
InProgress	This enumeration literal shall indicate that the source and target are becoming consistent.

**9.5.9.3.3 ConsistencyType** The defined property values are listed in Table 28. The ConsistencyType enumeration literal shall indicate the consistency type used by the source and its associated target group.

**Table 28:** ConsistencyType property values

string	Description
SequentiallyConsistent	This enumeration literal shall indicate that the source and target shall be sequentially consistent.

**9.5.9.3.4 ReplicaFaultDomain** The defined property values are listed in Table 29. The ReplicaFaultDomain enumeration literal shall describe the fault domain (local or remote) of the replica relationship.

Table 29: ReplicaFaultDomain property values

string	Description
Local	This enumeration literal shall indicate that the source and target replicas are contained within a single fault domain.

string	Description
Remote	This enumeration literal shall indicate that the source and target replicas are in separate fault domains.

**9.5.9.3.5 ReplicaPriority** The defined property values are listed in Table 30. The enumeration literal shall specify the priority of background copy engine I/O to be managed relative to host I/O operations during a sequential background copy operation.

**Table 30:** ReplicaPriority property values

string	Description
High	Copy engine I/O shall have a higher priority than host I/O.
Low	Copy engine I/O shall have a lower priority than host I/O.
Same	Copy engine I/O shall have the same priority as host I/O.
Urgent	Regardless of the host I/O requests, the Copy operation shall be performed as soon as possible.

**9.5.9.3.6 ReplicaProgressStatus** The defined property values are listed in Table 31. The ReplicaProgressStatus enumeration literal shall specify the status of the session with respect to Replication activity.

**Table 31:** ReplicaProgressStatus property values

string	Description
Aborting	This enumeration literal shall indicate that replication has an abort in progress.
Completed	This enumeration literal shall indicate that the request is completed. Data flow is idle.
21 May 2024	Working Draft 114

string	Description
Detaching	This enumeration literal shall indicate that replication has a detach in progress.
Dormant	This enumeration literal shall indicate that the data flow is inactive, suspended or quiesced.
FailingBack	This enumeration literal shall indicate that replication is undoing the result of failover.
FailingOver	This enumeration literal shall indicate that replication is in the process of switching sourc and target.
Fracturing	This enumeration literal shall indicate that replication has a fracture in progress.
Initializing	This enumeration literal shall indicate that replication is in the process of establishing source/replica relationship and the data flow has not started.
Mixed	This enumeration literal shall indicate that replication status is mixed across element pairs in a replication group. Generally, the individual statuses need to be examined.
Pending	This enumeration literal shall indicate that the flow of data has stopped momentarily due to limited bandwidth or a busy system.
Preparing	This enumeration literal shall indicate that replication has preparation in progress.
RequiresActivate	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be activated before further copy operations can be issued.
RequiresDetach	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be detached before further copy operations can be issued.

string	Description
RequiresFracture	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be fractured before further copy operations can be issued.
RequiresResume	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be resumed before further copy operations can be issued.
RequiresResync	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be resynced before further copy operations can be issued.
RequiresSplit	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be split before further copy operations can be issued.
Restoring	This enumeration literal shall indicate that replication has a restore in progress.
Resyncing	This enumeration literal shall indicate that replication has resynchronization in progress.
Splitting	This enumeration literal shall indicate that replication has a split in progress.
Suspending	This enumeration literal shall indicate that replication has a copy operation in the process of being suspended.
Synchronizing	This enumeration literal shall indicate that replication has synchronization in progress.
Terminating	This enumeration literal shall indicate that the replication relationship is in the process of terminating.

**9.5.9.3.7 ReplicaReadOnlyAccess** The defined property values are listed in Table 32. The enumeration literal shall specify whether the source, the target, or both elements are read only to the host.

Table 32: ReplicaReadOnlyAccess property values

string	Description
Both	Both the source and the target elements shall be read only to the host.
ReplicaElement	The replica element shall be read-only to the host.
SourceElement	The source element shall be read-only to the host.

**9.5.9.3.8 ReplicaRecoveryMode** The defined property values are listed in Table 33. The enumeration literal shall specify whether the copy operation continues after a broken link is restored.

**Table 33:** ReplicaRecoveryMode property values

string	Description
Automatic	The copy operation shall resume automatically.
Manual	The ReplicaState shall be set to Suspended after the link is restored. It is required to issue the Resume operation to continue.

**9.5.9.3.9 ReplicaRole** The defined property values are listed in Table 34. The ReplicaRole enumeration literal shall represent the source or target role of this replica as known to the containing resource.

**Table 34:** ReplicaRole property values

string	Description
Source	This enumeration literal shall indicate a source element.
Target	This enumeration literal shall indicate target element.

**9.5.9.3.10 ReplicaState** The defined property values are listed in Table 35. The ReplicaState enumeration literal shall specify the state of the relationship with respect to Replication activity.

Table 35: ReplicaState property values

string	Description
Aborted	This enumeration literal shall indicate that the copy operation is aborted with the Abort operation. The Resync Replica operation can be used to restart the copy operation.
Broken	This enumeration literal shall indicate that the relationship is non-functional due to errors in the source, the target, the path between the two or space constraints.
Failedover	This enumeration literal shall indicate that the reads and writes are sent to the target element The source element may not be reachable.
Fractured	This enumeration literal shall indicate that the Target is split from the source. The target may not be consistent.
Inactive	This enumeration literal shall indicate that data flow has stopped, writes to source element shall not be sent to target element.
Initialized	This enumeration literal shall indicate that the link to enable replication is established and source/replica elements are associated, but the data flow has not started.

string	Description
Invalid	This enumeration literal shall indicate that the storage server is unable to determine the state of the replication relationship, for example, after the connection is restored; however, either source or target elements have an unknown status.
Mixed	This enumeration literal shall indicate the ReplicaState of GroupSynchronized. The value indicates the StorageSynchronized relationships of the elements in the group have different ReplicaState values.
Partitioned	This enumeration literal shall indicate that the state of replication relationship can not be determined, for example, due to a connection problem.
Prepared	This enumeration literal shall indicate that initialization is completed, however, the data flow has not started.
Restored	This enumeration literal shall indicate that the source element was restored from the target element.
Skewed	This enumeration literal shall indicate that the target has been modified and is no longer synchronized with the source element or the point-in-time view.
Split	This enumeration literal shall indicate that the target element was gracefully (or systematically) split from its source element – consistency shall be guaranteed.
Suspended	This enumeration literal shall indicate that the data flow between the source and target elements has stopped. Writes to source element shall be held until the relationship is Resumed.

string	Description
Synchronized	This enumeration literal shall indicate that for Mirror, Snapshot, or Clone replication, the target represents a copy of the source.
Unsynchronized	This enumeration literal shall indicate that not all the source element data has been copied to the target element.

**9.5.9.3.11 ReplicaType** The defined property values are listed in Table 36. The ReplicaType enumeration literal shall describe the intended outcome of the replication.

**Table 36:** ReplicaType property values

string	Description
Clone	This enumeration literal shall indicate that replication shall create a point in time, full copy the source.
Mirror	This enumeration literal shall indicate that replication shall create and maintain a copy of the source.
Snapshot	This enumeration literal shall indicate that replication shall create a point in time, virtual copy of the source.
TokenizedClone	This enumeration literal shall indicate that replication shall create a token based clone.

**9.5.9.3.12 ReplicaUpdateMode** The defined property values are listed in Table 37. The enumeration literal shall specify whether the target elements will be updated synchronously or asynchronously.

**Table 37:** ReplicaUpdateMode property values

string	Description
Active	This enumeration literal shall indicate Active-Active (i.e. bidirectional) synchronous updates.
Adaptive	This enumeration literal shall indicate that an implementation may switch between synchronous and asynchronous modes.
Asynchronous	This enumeration literal shall indicate Asynchronous updates.
Synchronous	This enumeration literal shall indicate Synchronous updates.

**9.5.9.3.13 RequestedReplicaState** The defined property values are listed in Table 38. The last requested or desired state for the relationship. The actual state of the relationship shall be represented by ReplicaState. When RequestedState reaches the requested state, this property shall be null.

**Table 38:** RequestedReplicaState property values

string	Description
Aborted	This enumeration literal shall indicate that the copy operation is aborted with the Abort operation. The Resync Replica operation can be used to restart the copy operation.
Broken	This enumeration literal shall indicate that the relationship is non-functional due to errors in the source, the target, the path between the two or space constraints.
Failedover	This enumeration literal shall indicate that the reads and writes are sent to the target element.  The source element may not be reachable.

122

string	Description
Fractured	This enumeration literal shall indicate that the Target is split from the source. The target may not be consistent.
Inactive	This enumeration literal shall indicate that data flow has stopped, writes to source element shall not be sent to target element.
Initialized	This enumeration literal shall indicate that the link to enable replication is established and source/replica elements are associated, but the data flow has not started.
Invalid	This enumeration literal shall indicate that the storage server is unable to determine the state of the replication relationship, for example, after the connection is restored; however, either source or target elements have an unknown status.
Mixed	This enumeration literal shall indicate the ReplicaState of GroupSynchronized. The value indicates the StorageSynchronized relationships of the elements in the group have different ReplicaState values.
Partitioned	This enumeration literal shall indicate that the state of replication relationship can not be determined, for example, due to a connection problem.
Prepared	This enumeration literal shall indicate that initialization is completed, however, the data flow has not started.
Restored	This enumeration literal shall indicate that the source element was restored from the target element.
Skewed	This enumeration literal shall indicate that the target has been modified and is no longer synchronized with the source element or the point-in-time view.

123

string	Description
Split	This enumeration literal shall indicate that the target element was gracefully (or systematically) split from its source element – consistency shall be guaranteed.
Suspended	This enumeration literal shall indicate that the data flow between the source and target elements has stopped. Writes to source element shall be held until the relationship is Resumed.
Synchronized	This enumeration literal shall indicate that for Mirror, Snapshot, or Clone replication, the target represents a copy of the source.
Unsynchronized	This enumeration literal shall indicate that not all the source element data has been copied to the target element.

**9.5.9.3.14 UndiscoveredElement** The defined property values are listed in Table 39. The enumeration literal shall specify whether the source, the target, or both elements involved in a copy operation are undiscovered. An element is considered undiscovered if its object model is not known to the service performing the copy operation.

Table 39: Undiscovered Element property values

string	Description
ReplicaElement	This enumeration literal shall indicate that the replica element is undiscovered.
SourceElement	This enumeration literal shall indicate that the source element is undiscovered.

# 9.5.10 ReplicaRequest

**9.5.10.1 Description** A ReplicaRequest shall contain information about the ReplicaSource and the ReplicaName.

**9.5.10.2 Properties** The properties defined for the ReplicaRequest schema are summarized in Table 40.

Table 40: ReplicaRequest properties

Property	Type	Attribu tes	Notes
ReplicaName (v1.1+)	string	read-w rite (null)	The value shall be the names of the replica.
ReplicaSource (v1.1+) {	object		The value shall reference a resource to be replicated.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}			

#### 9.5.11 Schedule

**9.5.11.1 Description** The properties of this type shall schedule a series of occurrences.

**9.5.11.2 Properties** The properties defined for the Schedule schema are summarized in Table 41.

Table 41: Schedule properties

Property	Туре	Attributes	Notes
@odata.id	string	read-only	Link to another Schedule resource.

#### 9.5.12 Status

**9.5.12.1 Description** This type shall contain any status or health properties of a resource.

**9.5.12.2 Properties** The properties defined for the Status schema are summarized in Table 42.

Table 42: Status properties

		Attribu	
Property	Type	tes	Notes
<b>Conditions</b> ( <i>v1.11</i> +) [ {	array		This property shall
			represent the active
			conditions requiring
			attention in this or a
			related resource that
			affects the Health or
			HealthRollup of this
			resource. The service may
			roll up multiple
			conditions originating
			from a resource, using the
			ConditionInRelat-
			edRes ource message
			from Base Message
			Registry.
			= '

		Attribu	
Property	Туре	tes	Notes
LogEntry {	object		This property shall contain a link to a resource of type LogEntry that represents the log entry created for this condition.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
} Massaga	string	road o nly	This proporty shall
Message	string	read-o nly	This property shall contain a human-readable message describing this condition.
MessageArgs [ ]	array (string)	read-o nly	This property shall contain an array of message arguments that are substituted for the arguments in the message when looked up in the message registry. It has the same semantics as the MessageArgs property in the Redfish MessageRegistry schema.
MessageId	string	read-o nly require d	This property shall contain a MessageId, as defined in the "MessageId format" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
OriginOfCondition {	object		This property shall contain a link to the resource or object that originated the condition. This property shall not be present if the condition was caused by this resource.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
Resolution (v1.14+)	string	read-o nly	This property shall contain the resolution of the condition. Services should replace the resolution defined in the message registry with a more specific resolution.
ResolutionSteps (v1.18+) [ {}]	array (object)		This property shall contain an array of recommended steps to resolve the condition. A client can stop executing the resolution steps once the condition is removed from the resource. For property details, see ResolutionStep v1.0.0).

		Attribu	
Property	Type	tes	Notes
Severity	string (enum)	read-o nly	This property shall contain the severity of the condition. Services can replace the value defined in the message registry with a value more applicable to the implementation. For the possible property values, see Severity in Property details.
Timestamp	string (date-ti me)	read-o nly	This property shall indicate the time the condition occurred.
Health	string (enum)	read-o nly (null)	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification. For the possible property values, see Health in Property details.

		Attribu	
Property	Туре	tes	Notes
HealthRollup	string (enum)	read-o nly (null)	This property shall represent the health state of the resource and its dependent resources. The values shall conform to those defined in the Redfish Specification. For the possible property values, see HealthRollup in Property details.
Oem {	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements.
<b>(pattern)</b> {} }	object		Property names follow regular expression pattern "^[A-Za-z0-9_]+\$"

		Attribu	
Property	Type	tes	Notes
State	string	read-o nly	This property shall
	(enum)	(null)	indicate whether and wh
			this component is
			available. Enabled
			indicates the resource is
			available. Disabled
			indicates the resource
			has been intentionally
			made unavailable but it
			can be enabled. Offline
			indicates the resource is
			unavailable intentionally
			and requires action to
			make it available. InTest
			indicates that the
			component is undergoing
			testing. Starting indicates
			that the resource is
			becoming available.
			Absent indicates the
			resource is physically
			unavailable. For the
			possible property values,
			see State in Property
			details.

# 9.5.12.3 Property details

**9.5.12.3.1 Health** The defined property values are listed in Table 43. This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.

**Table 43:** Health property values

string	Description
Critical	A critical condition requires immediate attention.
OK	Normal.
Warning	A condition requires attention.

**9.5.12.3.2 HealthRollup** The defined property values are listed in Table 44. This property shall represent the health state of the resource and its dependent resources. The values shall conform to those defined in the Redfish Specification.

**Table 44:** HealthRollup property values

string	Description
Critical	A critical condition requires immediate attention.
OK	Normal.
Warning	A condition requires attention.

**9.5.12.3.3 Severity** The defined property values are listed in Table 45. This property shall contain the severity of the condition. Services can replace the value defined in the message registry with a value more applicable to the implementation.

Table 45: Severity property values

string	Description
Critical	A critical condition requires immediate attention.
OK	Normal.
Warning	A condition requires attention.

**9.5.12.3.4 State** The defined property values are listed in Table 46. This property shall indicate whether and why this component is available. Enabled indicates the

resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.

**Table 46:** State property values

string	Description
Absent	This function or device is not currently present or detected. This resource represents a capability or an available location where a device can be installed.
Deferring (v1.2+)	The element does not process any commands but queues new requests.
Disabled	This function or resource is disabled.
Enabled	This function or resource is enabled.
InTest	This function or resource is undergoing testing or is in the process of capturing information for debugging.
Qualified (v1.9+)	The element quality is within the acceptable range of operation.
Quiesced (v1.2+)	The element is enabled but only processes a restricted set of commands.
StandbyOffline	This function or resource is enabled but awaits an external action to activate it.
StandbySpare	This function or resource is part of a redundancy set and awaits a failover or other external action to activate it.
Starting	This function or resource is starting.
UnavailableOffline (v1.1+)	This function or resource is present but cannot be used.
Updating (v1.2+)	The element is updating and might be unavailable or degraded.

# 9.6 Swordfish Schema Types

#### 9.6.1 CapacitySource 1.2.1

**9.6.1.1 Description** This composition may be used to represent the source and type of storage capacity. At most one of the ProvidingDrives, ProvidingVolumes, ProvidingMemoryChunks, ProvidingMemory or ProvidingPools properties may have a value. If any of ProvidingDrives, ProvidingVolumes, ProvidingMemory or ProvidingPools reference more than one resource, allocation of capacity across those resources is implementation dependent.

9.6.1.2 URIs /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySources/redfish/v1/Storage/{StorageId}}/StoragePools/{StoragePoolId}/AllocatedVolumes/{VolumeId}/CapacitySources/redfish/v1/Storage/{StorageId}}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}}/redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources/{C

# **9.6.1.3 Properties** The properties defined for the CapacitySource 1.2.1 schema are summarized in Table 47.

Table 47: CapacitySource 1.2.1 properties

		Attribu	
Property	Type	tes	Notes
<b>Actions</b> (v1.1.2+) {}	object		The Actions property shall contain the available actions for this resource.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Name	string	read-o nly require d	This property shall contain the name of this resource or array members. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
ProvidedCapacity {}	object		The value shall be the amount of space that has been provided from the ProvidingDrives, ProvidingVolumes, ProvidingMemory or ProvidingPools. For property details, see Capacity.

		Attribu	
Property	Туре	tes	Notes
ProvidedClassOfServi ce	object		The value shall reference the provided ClassOfService from the ProvidingDrives, ProvidingVolumes, ProvidingMemoryChunks ProvidingMemory or ProvidingPools. See the <i>ClassOfService</i> schema for details on this property.
@odata.id	string	read-o nly	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.
}			
Providing Drives {	object		If present, the value shall be a reference to a contributing drive or drives.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}			
<b>ProvidingMemory</b> (v1.1+) {	object		If present, the value shall be a reference to the contributing memory.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}			
ProvidingMemoryChunk s (v1.1+) {	object		If present, the value shall be a reference to the contributing memory chunks.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}			
ProvidingPools {	object		If present, the value shall be a reference to a contributing storage pool or storage pools. Contains a link to a resource.
@odata.id	string	read-o nly	Link to Collection of StoragePool. See the StoragePool schema for details.
}			
ProvidingVolumes {	object		If present, the value shall be a reference to a contributing volume or volumes. Contains a link to a resource.

		Attribu	
Property	Type	tes	Notes
@odata.id	string	read-o nly	Link to Collection of <i>Volume</i> . See the Volume schema for details.
}			

# 9.6.2 CapacitySourceCollection

9.6.2.1 URIs /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources
/redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources
/redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources
/redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources
/redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/CapacitySources
/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources
/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources
/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources

**9.6.2.2 Properties** The properties defined for the CapacitySourceCollection schema are summarized in Table 48.

Table 48: CapacitySourceCollection properties

		Attribu	
Property	Type	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		The value of each member entry shall reference a CapacitySource resource.

		Attribu		
Property	Туре	tes	Notes	
@odata.id	string	read-o nly	Link to a CapacitySource resource. See the Links section and the <i>CapacitySource</i> schema for details.	
}]				
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.	
Name	string	read-o nly	This property shall contain the name of this resource or array members. The value shall conform with the "Name" clause of the Redfish Specification.	
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.	

# 9.6.3 ClassOfService 1.2.0

**9.6.3.1 Description** This resource shall define a service option composed of one or more line of service entities. ITIL defines a service option as a choice of utility or warranty for a service.

9.6.3.2 URIs /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}
/redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/ClassesOfService/{ClassOfServiceId}

**9.6.3.3 Properties** The properties defined for the ClassOfService 1.2.0 schema are summarized in Table 49.

Table 49: ClassOfService 1.2.0 properties

		Attribu	
Property	Туре	tes	Notes
<b>Actions</b> (v1.1+) {}	object		The Actions property shall contain the available actions for this resource.
ClassOfServiceVersio n	string	read-w rite (null)	The version describing the creation or last modification of this service option specification. The string representing the version shall be in the form: M + "." + N + "." + U Where: M - The major version (in numeric form). N - The minor version (in numeric form). U - The update (e.g. errata or patch in numeric form).
DataProtectionLinesO fService (v1.1.1+) [ {	array		The value shall be a set of data protection service options. Within a class of service, one data protection service option shall be present for each replication session.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string	read-w rite	Link to a  DataProtectionLineOfSe rvice resource. See the Links section and the DataProtectionLineOfS ervice schema for details.
}]			
DataSecurityLinesOfS ervice (v1.1.1+) [ {	array		The value shall be a set o data security service options.
@odata.id	string	read-w rite	Link to a DataSecurityLineOfServ ice resource. See the Links section and the DataSecurityLineOfSer vice schema for details.
}]			
DataStorageLinesOfSe rvice (v1.1.1+) [ {	array		The value shall be a set o data protection service options.
@odata.id	string	read-w rite	Link to a  DataStorageLineOfServi ce resource. See the Link section and the  DataStorageLineOfServ ice schema for details.
}]			
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification

		Attribu	
Property	Туре	tes	Notes
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Identifier {}	object		The value shall be unique within the managed ecosystem. For property details, see Identifier v1.18.0).
IOConnectivityLinesO fService (v1.1.1+) [ {	array		The value shall be a set of IO connectivity service options. Within a class of service, at most one IO connectivity service option may be present for a value of AccessProtocol
@odata.id	string	read-w rite	Link to a IOConnectivityLineOfSe rvice resource. See the Links section and the IOConnectivityLineOfS ervice schema for details
IOPerformanceLinesOf Service (v1.1.1+) [ {	array		The value shall be a set of IO performance service options.
@odata.id	string	read-w rite	Link to a IOPerformanceLineOfSe vice resource. See the Links section and the IOPerformanceLineOfSe rvice schema for details.

		Attribu	
Property	Туре	tes	Notes
}]			
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

# 9.6.4 ClassOfServiceCollection

**9.6.4.1 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/ClassesOfService

**9.6.4.2 Properties** The properties defined for the ClassOfServiceCollection schema are summarized in Table 50.

 Table 50:
 ClassOfServiceCollection properties

Property	Туре	Attribu tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		The value of each member entry shall reference a ClassOfService or LineOfService resource.
@odata.id	string	read-o nly	Link to a LineOfService resource. See the Links section and the <i>LineOfService</i> schema for details.
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.
Name	string	read-o nly	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

# 9.6.5 ConsistencyGroup 1.1.1

**9.6.5.1 Description** A collection of volumes grouped together to ensure write order consistency across all those volumes. A management operation on a consistency group, such as configuring replication properties, applies to all the volumes within the consistency group.

**9.6.5.2 URIs** /redfish/v1/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId} /redfish/v1/StorageServices/{StorageServiceId}/ConsistencyGroups/{ConsistencyGroupId} /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/ConsistencyGroups/{ConsistencyGroupId} /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId}

**9.6.5.3 Properties** The properties defined for the ConsistencyGroup 1.1.1 schema are summarized in Table 51.

**Table 51:** ConsistencyGroup 1.1.1 properties

		Attribu	
Property	Туре	tes	Notes
Actions {	object		The Actions property shall contain the available actions for this resource.

		Attribu	
Property	Туре	tes	Notes
#ConsistencyGroup.A ssignReplicaTarget {}	object		This action shall be used to establish a replication relationship by assigning an existing consistency group to serve as a target replica for an existing source consistency group For more information, see the Actions section below.
#ConsistencyGroup.C reateReplicaTarget {}	object		This action shall be used to create a new consistency group resource to provide expanded data protection through a replica relationship with the specified source consistency group. For more information, see the Actions section below.
#ConsistencyGroup.R emoveReplicaRela- tionsh ip {}	object		This action shall be used to disable data synchronization between a source and target consistency group, remove the replication relationship, and optionally delete the target consistency group. For more information, see the Actions section below.

		Attribu	
Property	Туре	tes	Notes
#ConsistencyGroup.R esumeReplication {}	object		This action shall be used to resume the active data synchronization between a source and target consistency group, without otherwise altering the replication relationship. For more information, see the Actions section below.
#ConsistencyGroup.R everseReplicationRelat ionship {}	object		This action shall be used to reverse the replication relationship between a source and target consistency group. For more information, see the Actions section below.
#ConsistencyGroup.S plitReplication {}	object		This action shall be used to split the replication relationship and suspend data synchronization between a source and target consistency group. For more information, see the Actions section below.
#ConsistencyGroup.S uspendReplication {}	object		This action shall be used to suspend active data synchronization between a source and target consistency group, without otherwise altering the replication relationship. For more information, see the Actions section below.

		Attribu	
Property	Туре	tes	Notes
}			
ConsistencyMethod	string (enum)	read-w rite(null)	The property shall set the consistency method used by this group. For the possible property values, see ConsistencyMethod in Property details.
ConsistencyType	string (enum)	read-w rite(null)	This property shall set the consistency type used by this group. For the possible property values, see ConsistencyType in Property details.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
IsConsistent	boolean	read-o nly (null)	The value of this property shall be set to true when the consistency group is in a consistent state.
Links {	object		This property shall contain links to other resources that are related to this resource.

		Attribu	
Property	Туре	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
}			<del>-</del> 1.
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
RemoteReplicaTargets (v1.1+) []	array (string, null)	read-o nly	The value shall reference the URIs to the remote target replicas that are sourced by this replica. Remote indicates that the replica is managed by a separate Swordfish service instance.

		Attribu	
Property	Туре	tes	Notes
ReplicaInfo {}	object		This property shall describe the replication relationship between this storage group and a corresponding source storage group. For property details, see Replicalnfo v1.4.0).
ReplicaTargets [ {	array		The value shall reference the target replicas that are sourced by this replica.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
Status {}	object		The property shall contain the status of the ConsistencyGroup. For property details, see Status.
Volumes [ {	array		An array of references to volumes managed by this storage group.
@odata.id	string	read-w rite	Link to a Volume resource See the Links section and the <i>Volume</i> schema for details.

## 9.6.5.4 Actions

# 9.6.5.4.1 AssignReplicaTarget Description

This action shall be used to establish a replication relationship by assigning an existing consistency group to serve as a target replica for an existing source consistency group.

## **Action URI**

 ${\it [Base~URI~of~target~resource]/} Actions/ConsistencyGroup. Assign Replica Target$ 

## **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 52.

**Table 52:** AssignReplicaTarget action parameters

Parameter Name	Type	Attributes	Notes
ReplicaType	string (enum)	required	This parameter shall contain the type of replica relationship to be created. For the possible property values, see ReplicaType in Property details.
ReplicaUpdateMod e	string (enum)	required	This parameter shall specify the replica update mode. For the possible property values, see ReplicaUpdateM ode in Property details.

Parameter Name Type Attributes Notes  TargetConsistenc string required This parameter shall contain the Uri to the existing consistency group.				
yGroup shall contain the Uri to the existing consistency	Parameter Name	Type	Attributes	Notes
	•	string	required	shall contain the Uri to the existing consistency

# 9.6.5.4.2 CreateReplicaTarget Description

This action shall be used to create a new consistency group resource to provide expanded data protection through a replica relationship with the specified source consistency group.

#### **Action URI**

 ${\it [Base~URI~of~target~resource]/} Actions/ConsistencyGroup. CreateReplicaTarget$ 

## **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 53.

**Table 53:** CreateReplicaTarget action parameters

Parameter Name	Туре	Attributes	Notes
ConsistencyGroup Name	string	required	This parameter shall contain the Name for the target consistency
			group.

Parameter Name	Type	Attributes	Notes
ReplicaType	string (enum)	required	This parameter shall contain the type of replica relationship to be created. For the possible property values, see ReplicaType in Property details.
ReplicaUpdateMod e	string (enum)	required	This parameter shall specify the replica update mode. For the possible property values, see ReplicaUpdateM ode in Property details.
TargetStoragePoo l	string	required	This parameter shall contain the Uri to the existing StoragePool in which to create the target consistency group.

# 9.6.5.4.3 RemoveReplicaRelationship Description

This action shall be used to disable data synchronization between a source and target consistency group, remove the replication relationship, and optionally delete the target consistency group.

# **Action URI**

{Base URI of target resource}/Actions/ConsistencyGroup.RemoveReplicaRelationship

# **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 54.

**Table 54:** RemoveReplicaRelationship action parameters

Parameter Name	Type	Attributes	Notes
DeleteTargetCons istencyGroup	boolean	optional	This parameter shall indicate whether or not to delete the target consistency group as part of the operation. If not specified, the system should use its default behavior.
TargetConsistenc yGroup	string	required	This parameter shall contain the Uri to the existing target consistency group.

## 9.6.5.4.4 ResumeReplication Description

This action shall be used to resume the active data synchronization between a source and target consistency group, without otherwise altering the replication relationship.

### **Action URI**

{Base URI of target resource}/Actions/ConsistencyGroup.ResumeReplication

### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 55.

**Table 55:** ResumeReplication action parameters

Parameter Name	Туре	Attributes	Notes
TargetConsistenc yGroup	string	required	This parameter shall contain the Uri to the existing target consistency
			group.

# 9.6.5.4.5 ReverseReplicationRelationship Description

This action shall be used to reverse the replication relationship between a source and target consistency group.

### **Action URI**

{Base URI of target resource}/Actions/ConsistencyGroup.ReverseReplicationRelationship

### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 56.

**Table 56:** ReverseReplicationRelationship action parameters

Parameter Name	Type	Attributes	Notes
TargetConsistenc yGroup	string	required	This parameter shall contain the Uri to the existing target consistency
			group.

## 9.6.5.4.6 SplitReplication Description

This action shall be used to split the replication relationship and suspend data synchronization between a source and target consistency group.

#### **Action URI**

{Base URI of target resource}/Actions/ConsistencyGroup.SplitReplication

### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 57.

**Table 57:** SplitReplication action parameters

Parameter Name	Туре	Attributes	Notes
TargetConsistenc yGroup	string	required	This parameter shall contain the Uri to the existing target consistency group.

## 9.6.5.4.7 SuspendReplication Description

This action shall be used to suspend active data synchronization between a source and target consistency group, without otherwise altering the replication relationship.

### **Action URI**

{Base URI of target resource}/Actions/ConsistencyGroup.SuspendReplication

## **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 58.

**Table 58:** SuspendReplication action parameters

Parameter Name	Туре	Attributes	Notes
TargetConsistenc yGroup	string	required	This parameter shall contain the Uri to the existing target consistency
			group.

# 9.6.5.5 Property details

**9.6.5.5.1 ConsistencyMethod** The defined property values are listed in Table 59. The property shall set the consistency method used by this group.

**Table 59:** ConsistencyMethod property values

string	Description
HotStandby	Supports consistency method commonly orchestrated using application-specific code.
Other	Supports consistency method orchestrated using vendor-specific code.
VASA	Supports VMware consistency requirements, such as for VASA and VVOLs.
VDI	Supports Microsoft virtual backup device interface (VDI).
VSS	Supports Microsoft VSS.

**9.6.5.5.2 ConsistencyType** The defined property values are listed in Table 60. This property shall set the consistency type used by this group.

**Table 60:** ConsistencyType property values

string	Description
ApplicationConsistent	Orchestration exists to either flush or halt pending IO to ensure operations occur in a transactionally consistent manner.
CrashConsistent	Requested operations are either triggered or instituted without regard to pending IO.

**9.6.5.5.3 ReplicaType** The defined property values are listed in Table 61. This parameter shall contain the type of replica relationship to be created.

**Table 61:** ReplicaType property values

string	Description
Clone	This enumeration literal shall indicate that replication shall create a point in time, full copy the source.
Mirror	This enumeration literal shall indicate that replication shall create and maintain a copy of the source.
Snapshot	This enumeration literal shall indicate that replication shall create a point in time, virtual copy of the source.
TokenizedClone	This enumeration literal shall indicate that replication shall create a token based clone.

**9.6.5.5.4 ReplicaUpdateMode** The defined property values are listed in Table 62. This parameter shall specify the replica update mode.

Table 62: ReplicaUpdateMode property values

string	Description
Active	This enumeration literal shall indicate Active-Active (i.e. bidirectional) synchronous updates.
Adaptive	This enumeration literal shall indicate that an implementation may switch between synchronous and asynchronous modes.
Asynchronous	This enumeration literal shall indicate Asynchronous updates.
Synchronous	This enumeration literal shall indicate Synchronous updates.

# 9.6.6 ConsistencyGroupCollection

**9.6.6.1 URIs** /redfish/v1/Storage/{StorageId}/ConsistencyGroups/redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/ConsistencyGroups/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/ConsistencyGroups

**9.6.6.2 Properties** The properties defined for the ConsistencyGroupCollection schema are summarized in Table 63.

Table 63: ConsistencyGroupCollection properties

		Attribu	
Property	Type	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
Members [ {	array		The value of each member entry shall reference a ConsistencyGroup resource.
@odata.id	string	read-o nly	Link to a ConsistencyGroup resource. See the Links section and the ConsistencyGroup scheme for details.
}]			
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.
Name	string	read-o nly	This property shall contain the name of this resource or array membe The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

### 9.6.7 DataProtectionLineOfService 1.3.0

**9.6.7.1 Description** This service option describes a replica that protects data from loss. The requirements must be met collectively by the communication path and the replica.

**9.6.7.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/DataPro/redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/DataProtectionLinesOfService/{DataProtectionLinesOfService}

**9.6.7.3 Properties** The properties defined for the DataProtectionLineOfService 1.3.0 schema are summarized in Table 64.

Table 64: DataProtectionLineOfService 1.3.0 properties

		Attribu	
Property	Туре	tes	Notes
<b>Actions</b> (v1.2+) {	object		The Actions property shall contain the available actions for this resource.
#DataProtectionLine OfService.CreateReplic as {}	object		This action shall create an on-demand replica that conforms to the bound DataProtectionLineOfSe rvice. For more information, see the Actions section below.
}			
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.

		Attribu	Attribu	
Property	Туре	tes	Notes	
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.	
IsIsolated	boolean	read-w rite (null)	True shall indicate that the replica is in a separate fault domain from its source. The default value of this property is false.	
MinLifetime	string	read-w rite (null)	The value shall be an ISO 8601 duration that specifies the minimum required lifetime of the replica. Note: The maximum number of replicas can be determined using this value together with the replicaSchedule.	
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.	

		Attribu	
Property	Туре	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
RecoveryGeographicOb jective	string (enum)	read-w rite(null)	The value specifies the geographic scope of the failure domain. For the possible property values, see RecoveryGeographicObje ctive in Property details.
RecoveryPointObjecti veTime	string	read-w rite (null)	The value shall be an ISO 8601 duration that specifies the maximum time over which source data may be lost on failure. In the case that IsIsolated = false, failure of the domain is not a consideration.

Property	Туре	Attribu tes	Notes
RecoveryTimeObjectiv e	string (enum)	read-w rite(null)	The value shall be an enumeration that indicates the maximum time required to access an alternate replica. In the case that IsIsolated = false, failure of the domain is not a consideration. For the possible property values, see  RecoveryTimeObjective in Property details.
ReplicaAccessLocatio n {}	object		This value shall be used if the data access location of the replica is required to be at a specific location. Note 1: The location value may be granular. Note 2: A value may be required for some regulatory compliance. For property details, see Location v1.3.0).
ReplicaClassOfServic e {	object		The value shall reference the class of service that defines the required service levels of the replica. See the <i>ClassOfService</i> schema for details on this property.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string	read-w rite	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.
}			
ReplicaType	string (enum)	read-w rite(null)	The type of replica shall conform to this value. For the possible property values, see ReplicaType in Property details.
Schedule {}	object		If a replica is made periodically, the value shall define the schedule. For property details, see Schedule v1.2.4).

## 9.6.7.4 Actions

# 9.6.7.4.1 CreateReplicas Description

This action shall create an on-demand replica that conforms to the bound DataProtectionLineOfService.

## **Action URI**

{Base URI of target resource}/Actions/DataProtectionLineOfService.CreateReplicas

# **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 65.

**Table 65:** CreateReplicas action parameters

Туре	Attributes	Notes
object	required	The value shall reference the data protection line of service this operation is bound to.
string	read-only	Link to another DataProtection LineOfService resource.
array	optional	Each value shall reference a source resource and provide a name for the replica.
string	read-write (null)	The value shall be the names of the replica.
object		The value shall reference a resource to be replicated.
string (URI)	read-only	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
	object string array string object	object required  string read-only  string read-write (null)  object

Parameter Name	Туре	Attributes	Notes
}			
}]			

# 9.6.7.5 Property details

**9.6.7.5.1 RecoveryGeographicObjective** The defined property values are listed in Table 66. The value specifies the geographic scope of the failure domain.

**Table 66:** RecoveryGeographicObjective property values

string	Description
Datacenter	A facility that provides communication, power, or cooling infrastructure to a co-located set of servers, networking and storage.
Rack	A container within a datacenter that provides communication, power, or cooling to a set of components.
RackGroup	A set of racks that may share common communication, power, or cooling.
Region	A set of resources that are required to be either geographically or politically isolated from resources not in the resources.
Row	A set of adjacent racks or rackgroups that may share common communication, power, or cooling.
Server	Components of a CPU/memory complex that share the same infrastructure.

**9.6.7.5.2 RecoveryTimeObjective** The defined property values are listed in Table 67. The value shall be an enumeration that indicates the maximum time required to access an alternate replica. In the case that IsIsolated = false, failure of the domain is not a consideration.

**Table 67:** RecoveryTimeObjective property values

string	Description
Nearline	Access to a replica shall be consistent with switching access to a different path through a different front-end interconnection infrastructure. Some inconsistency may occur. A restore step may be required before recovery can commence.
Offline	Access to a replica may take a significant amount of time. No direct connection to the replica is assumed. Some inconsistency loss may occur. A restore step is likely to be required.
OnlineActive	Access to synchronous replicas shall be instantaneous.
OnlinePassive	Access to a synchronous replica shall be consistent with switching access to a different path the same front-end interconnect. A restore step shall not be required.

**9.6.7.5.3 ReplicaType** The defined property values are listed in Table 68. The type of replica shall conform to this value.

**Table 68:** ReplicaType property values

string	Description
Clone	This enumeration literal shall indicate that replication shall create a point in time, full copy the source.
Mirror	This enumeration literal shall indicate that replication shall create and maintain a copy of the source.

string	Description
Snapshot	This enumeration literal shall indicate that replication shall create a point in time, virtual copy of the source.
TokenizedClone	This enumeration literal shall indicate that replication shall create a token based clone.

## 9.6.8 DataProtectionLoSCapabilities 1.2.0

**9.6.8.1 Description** The capabilities to protect data from loss by the use of a replica. The requirements shall be met collectively by the communication path and the replica. There should be one instance associated to a class of service for each replica. Each replica independently should have a class of service that describes its characteristics.

**9.6.8.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/DataProtectionLoSCapabilities

**9.6.8.3 Properties** The properties defined for the DataProtectionLoSCapabilities 1.2.0 schema are summarized in Table 69.

**Table 69:** DataProtectionLoSCapabilities 1.2.0 properties

		Attribu	
Property	Туре	tes	Notes
<b>Actions</b> (v1.1+) {}	object		The Actions property shall contain the available actions for this resource.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Identifier {}	object		The value shall be unique within the managed ecosystem. For property details, see Identifier v1.18.0).
Links {	object		The value of this property shall contains links to other resources that are not contained in this resource.
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
SupportedReplicaOpti ons [ {	array		The collection shall contain known and supported replica Classe of Service.
@odata.id	string	read-w rite	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.

_	_	Attribu	
Property	Туре	tes	Notes
}]			
}			
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
SupportedLinesOfServ ice [ {	array		The collection shall contain known and supported DataProtectionLinesOfS ervice.
@odata.id	string	read-w rite	Link to a  DataProtectionLineOfSe  rvice resource. See the  Links section and the  DataProtectionLineOfS  ervice schema for details.

Property	Туре	Attribu tes	Notes
SupportedMinLifetime s	array (string, null)	read-w rite	The value of each entry shall be an ISO 8601 duration that specifies the minimum lifetime required for the replica.
SupportedRecoveryGeo graphicObjectives []	array (string (enum))	read-w rite(null)	The value of each entry shall specify a supported failure domain. For the possible property values, see SupportedRecoveryGeographicObjectives in Property details.
SupportedRecoveryPointObjectiveTimes []	array (string, null)	read-w rite	The value of each entry shall specify a supported ISO 8601 time interval defining the maximum source information that may be lost on failure. In the case that IsIsolated = false, failure of the domain is not a consideration.

		Attribu	
Property	Туре	tes	Notes
SupportedRecoveryTim eObjectives []	array (string (enum))	read-w rite(null)	The value of each entry shall specify an enumerated value that indicates a supported expectation for the time required to access an alternate replica. In the case that IsIsolated = false, failure of the domain is not a consideration. For the possible property values, see  SupportedRecoveryTimeObjectives in Property details.
SupportedReplicaType s []	array (string (enum))	read-w rite(null)	The value of each entry shall specify a supported replica type. For the possible property values, see SupportedReplicaTypes in Property details.
SupportsIsolated	boolean	read-w rite (null)	A value of true shall indicate that allocating a replica in a separate fault domain is supported. The default value for this property is false.

# 9.6.8.4 Property details

**9.6.8.4.1 SupportedRecoveryGeographicObjectives** The defined property values are listed in Table 70. The value of each entry shall specify a supported failure

domain.

**Table 70:** SupportedRecoveryGeographicObjectives property values

string	Description
Datacenter	A facility that provides communication, power, or cooling infrastructure to a co-located set of servers, networking and storage.
Rack	A container within a datacenter that provides communication, power, or cooling to a set of components.
RackGroup	A set of racks that may share common communication, power, or cooling.
Region	A set of resources that are required to be either geographically or politically isolated from resources not in the resources.
Row	A set of adjacent racks or rackgroups that may share common communication, power, or cooling.
Server	Components of a CPU/memory complex that share the same infrastructure.

**9.6.8.4.2 SupportedRecoveryTimeObjectives** The defined property values are listed in Table 71. The value of each entry shall specify an enumerated value that indicates a supported expectation for the time required to access an alternate replica. In the case that IsIsolated = false, failure of the domain is not a consideration.

**Table 71:** SupportedRecoveryTimeObjectives property values

string	Description
Nearline	Access to a replica shall be consistent with switching access to a different path through a different front-end interconnection infrastructure. Some inconsistency may occur. A restore step may be required before recovery can commence.
Offline	Access to a replica may take a significant amount of time. No direct connection to the replica is assumed. Some inconsistency loss may occur. A restore step is likely to be required.
OnlineActive	Access to synchronous replicas shall be instantaneous.
OnlinePassive	Access to a synchronous replica shall be consistent with switching access to a different path the same front-end interconnect. A restore step shall not be required.

**9.6.8.4.3 SupportedReplicaTypes** The defined property values are listed in Table 72. The value of each entry shall specify a supported replica type.

**Table 72:** SupportedReplicaTypes property values

Description
This enumeration literal shall indicate that replication shall create a point in time, full copy the source.
This enumeration literal shall indicate that replication shall create and maintain a copy of the source.

string	Description
Snapshot	This enumeration literal shall indicate that replication shall create a point in time, virtual copy of the source.
TokenizedClone	This enumeration literal shall indicate that replication shall create a token based clone.

# 9.6.9 DataSecurityLineOfService 1.1.1

**9.6.9.1 Description** This structure shall be used to describe data security service level requirements.

**9.6.9.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/DataSec/redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/DataSecurityLinesOfService/{DataSecurityLinesOfService}

**9.6.9.3 Properties** The properties defined for the DataSecurityLineOfService 1.1.1 schema are summarized in Table 73.

Table 73: DataSecurityLineOfService 1.1.1 properties

		Attribu	
Property	Туре	tes	Notes
<b>Actions</b> (v1.1+) {}	object		The Actions property shall contain the available actions for this resource.
AntivirusEngineProvi der	string	read-w rite (null)	The value shall specify an AntiVirus provider.
AntivirusScanPolicie s []	array (string (enum))	read-w rite(null)	The enumeration literal shall specify the policy for triggering an AntiVirus scan. For the possible property values, see Antivirus Scan Policies in Property details.

		Attribu	
Property	Туре	tes	Notes
ChannelEncryptionStr ength	string (enum)	read-w rite(null)	The enumeration literal shall specify a key size in a symmetric encryption algorithm for transport channel encryption. For the possible property values, see ChannelEncryptionStrength in Property details.
DataSanitizationPoli cy	string (enum)	read-w rite(null)	The enumeration literal shall specify the data sanitization policy. For the possible property values, see DataSanitizationPolicy in Property details.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification
HostAuthenticationTy pe	string (enum)	read-w rite(null)	The enumeration literal shall specify the authentication type for hosts (servers) or initiato endpoints. For the possible property values, see  HostAuthenticationType in Property details.

Property	Type	Attribu tes	Notes
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
MediaEncryptionStren gth	string (enum)	read-w rite(null)	The enumeration literal shall specify a key size in a symmetric encryption algorithm for media encryption. For the possible property values, see  MediaEncryptionStrengt him Property details.
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

		Attribu	
Property	Туре	tes	Notes
SecureChannelProtoco l	string (enum)	read-w rite(null)	The enumeration literal shall specify the protocol that provide encrypted communication. For the possible property values, see SecureChannelProtocol in Property details.
UserAuthenticationTy pe	string (enum)	read-w rite(null)	The enumeration literal shall specify the authentication type for users (or programs). For the possible property values, see UserAuthenticationType in Property details.

# 9.6.9.4 Property details

**9.6.9.4.1 AntivirusScanPolicies** The defined property values are listed in Table 74. The enumeration literal shall specify the policy for triggering an AntiVirus scan.

Table 74: Antivirus Scan Policies property values

Description
This enumeration literal specifies No trigger.
This enumeration literal specifies to trigger on first read.
This enumeration literal specifies to trigger on antivirus pattern file update.
This enumeration literal specifies to trigger on object rename.

179

string	Description
OnUpdate	This enumeration literal specifies to trigger on object update.

**9.6.9.4.2 ChannelEncryptionStrength** The defined property values are listed in Table 75. The enumeration literal shall specify a key size in a symmetric encryption algorithm for transport channel encryption.

**Table 75:** ChannelEncryptionStrength property values

string	Description
Bits_0	This enumeration literal specifies that there is no key.
Bits_112	This enumeration literal specifies a 3DES 112 bit key.
Bits_128	This enumeration literal specifies an AES 128 bit key.
Bits_192	This enumeration literal specifies an AES 192 bit key.
Bits_256	This enumeration literal specifies an AES 256 bit key.

**9.6.9.4.3 DataSanitizationPolicy** The defined property values are listed in Table 76. The enumeration literal shall specify the data sanitization policy.

Table 76: DataSanitizationPolicy property values

string	Description
Clear	This enumeration literal specifies to sanitize data in all user-addressable storage locations for protection against simple non-invasive data recovery techniques.

string	Description
CryptographicErase	This enumeration literal specifies to leverages the encryption of target data by enabling sanitization of the target data's encryption key. This leaves only the ciphertext remaining on the media, effectively sanitizing the data by preventing read-access. For more information, see NIST800-88 and ISO/IEC 27040.
None	This enumeration literal specifies no sanitization.

**9.6.9.4.4 HostAuthenticationType** The defined property values are listed in Table 77. The enumeration literal shall specify the authentication type for hosts (servers) or initiator endpoints.

**Table 77:** HostAuthenticationType property values

string	Description
None	This enumeration literal specifies No authentication.
Password	This enumeration literal specifies Password/shared-secret: Absent an distributed authentication infrastructure, this is what is typically done.
PKI	This enumeration literal specifies a Public Key Infrastructure. Customers with the highest assurance requirements roll PKI out to hosts and users (it is more common for hosts than users. User PKI-based authentication has significant operational complications and administrative overheads, e.g., smart cards may be involved.

Description
This enumeration literal specifies Ticket-based (e.g., Kerberos): This is the most common class of authentication infrastructure used in enterprises. Kerberos is the best known example, and Windows usage of that via Active Directory is so widely deployed as to be a de facto standard. In other areas (e.g., academia) there are comparable ticket-based systems.

**9.6.9.4.5 MediaEncryptionStrength** The defined property values are listed in Table 78. The enumeration literal shall specify a key size in a symmetric encryption algorithm for media encryption.

**Table 78:** MediaEncryptionStrength property values

string	Description
Bits_0	This enumeration literal specifies that there is no key.
Bits_112	This enumeration literal specifies a 3DES 112 bit key.
Bits_128	This enumeration literal specifies an AES 128 bit key.
Bits_192	This enumeration literal specifies an AES 192 bit key.
Bits_256	This enumeration literal specifies an AES 256 bit key.

**9.6.9.4.6 SecureChannelProtocol** The defined property values are listed in Table 79. The enumeration literal shall specify the protocol that provide encrypted communication.

**Table 79:** SecureChannelProtocol property values

string	Description
IPsec	This enumeration literal specifies Internet Protocol Security (IPsec), as defined by IETF RFC 2401.
None	This enumeration literal specifies no encryption.
RPCSEC_GSS	This enumeration literal specifies RPC access to the Generic Security Services Application Programming Interface (GSS-API), as defined by IETF RPC 2203.
TLS	This enumeration literal specifies Transport Layer Security (TLS), as defined by IETF RFC 5246.

**9.6.9.4.7 UserAuthenticationType** The defined property values are listed in Table 80. The enumeration literal shall specify the authentication type for users (or programs).

**Table 80:** UserAuthenticationType property values

string	Description
None	This enumeration literal specifies No authentication.
Password	This enumeration literal specifies Password/shared-secret: Absent an distributed authentication infrastructure, this is what is typically done.

string	Description
PKI	This enumeration literal specifies a Public Key Infrastructure. Customers with the highest assurance requirements roll PKI out to hosts and users (it is more common for hosts than users. User PKI-based authentication has significant operational complications and administrative overheads, e.g., smart cards may be involved.
Ticket	This enumeration literal specifies Ticket-based (e.g., Kerberos): This is the most common class of authentication infrastructure used in enterprises. Kerberos is the best known example, and Windows usage of that via Active Directory is so widely deployed as to be a de facto standard. In other areas (e.g., academia) there are comparable ticket-based systems.

# 9.6.10 DataSecurityLoSCapabilities 1.2.0

**9.6.10.1 Description** This resource may be used to describe data security capabilities.

**9.6.10.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/DataSecurityLoSCapabilities

**9.6.10.3 Properties** The properties defined for the DataSecurityLoSCapabilities 1.2.0 schema are summarized in Table 81.

**Table 81:** DataSecurityLoSCapabilities 1.2.0 properties

		Attribu	
Property	Туре	tes	Notes
<b>Actions</b> (v1.1+) {}	object		The Actions property shall contain the available actions for this resource.

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Identifier {}	object		The value identifies this resource. The value shall be unique within the managed ecosystem. For property details, see Identifier v1.18.0).
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

		Attribu	
Property	Туре	tes	Notes
SupportedAntivirusEn gineProviders []	array (string, null)	read-w rite	The entry values shall specify supported AntiVirus providers.
SupportedAntivirusSc anPolicies []	array (string (enum))	read-w rite(null)	The enumeration literal shall specify supported policies that trigger an AntiVirus scan. For the possible property values, see SupportedAntivirusScan Policies in Property details.
SupportedChannelEncr yptionStrengths []	array (string (enum))	read-w rite(null)	The enumeration literal shall specify supported key sizes in a symmetric encryption algorithm (AES) for transport channel encryption. For the possible property values, see SupportedChannelEncryptionStrengths in Property details.
SupportedDataSanitiz ationPolicies []	array (string (enum))	read-w rite(null)	The enumeration literal shall specify supported data sanitization policie For the possible property values, see SupportedDataSanitizat ionPolicies in Property details.

		Attribu	
Property	Туре	tes	Notes
SupportedHostAuthent icationTypes []	array (string (enum))	read-w rite(null)	The enumeration literal shall specify supported authentication types for hosts (servers) or initiate endpoints. For the possible property values, see SupportedHostAuthentic ationTypes in Property details.
SupportedLinesOfServ ice [{	array		The collection shall contain supported DataSecurity service options.
@odata.id	string	read-w rite	Link to a DataSecurityLineOfServ ice resource. See the Links section and the DataSecurityLineOfSer vice schema for details.
}]			
SupportedMediaEncryp tionStrengths []	array (string (enum))	read-w rite(null)	The enumeration literal shall specify supported key sizes in a symmetric encryption algorithm (AES) for media encryption. For the possible property values, see SupportedMediaEncrypti onStrengths in Property details.

		Attribu	
Property	Туре	tes	Notes
SupportedSecureChann elProtocols []	array (string (enum))	read-w rite(null)	The enumeration literal shall specify supported protocols that provide encrypted communication. For the possible property values, see SupportedSecureChannel Protocols in Property details.
SupportedUserAuthent icationTypes []	array (string (enum))	read-w rite(null)	The enumeration literal shall specify supported authentication types for users (or programs). For the possible property values, see SupportedUserAuthentic ationTypes in Property details.

### 9.6.10.4 Property details

**9.6.10.4.1 SupportedAntivirusScanPolicies** The defined property values are listed in Table 82. The enumeration literal shall specify supported policies that trigger an AntiVirus scan.

**Table 82:** SupportedAntivirusScanPolicies property values

string	Description
None	This enumeration literal specifies No trigger.
OnFirstRead	This enumeration literal specifies to trigger on first read.

string	Description
OnPatternUpdate	This enumeration literal specifies to trigger on antivirus pattern file update.
OnRename	This enumeration literal specifies to trigger on object rename.
OnUpdate	This enumeration literal specifies to trigger on object update.

**9.6.10.4.2 SupportedChannelEncryptionStrengths** The defined property values are listed in Table 83. The enumeration literal shall specify supported key sizes in a symmetric encryption algorithm (AES) for transport channel encryption.

**Table 83:** SupportedChannelEncryptionStrengths property values

string	Description
Bits_0	This enumeration literal specifies that there is no key.
Bits_112	This enumeration literal specifies a 3DES 112 bit key.
Bits_128	This enumeration literal specifies an AES 128 bit key.
Bits_192	This enumeration literal specifies an AES 192 bit key.
Bits_256	This enumeration literal specifies an AES 256 bit key.

**9.6.10.4.3 SupportedDataSanitizationPolicies** The defined property values are listed in Table 84. The enumeration literal shall specify supported data sanitization policies.

 Table 84:
 Supported Data Sanitization Policies property values

string	Description
Clear	This enumeration literal specifies to sanitize data in all user-addressable storage locations for protection against simple non-invasive data recovery techniques.

string	Description
CryptographicErase	This enumeration literal specifies to leverages the encryption of target data by enabling sanitization of the target data's encryption key. This leaves only the ciphertext remaining on the media, effectively sanitizing the data by preventing read-access. For more information, see NIST800-88 and ISO/IEC 27040.
None	This enumeration literal specifies no sanitization.

**9.6.10.4.4 SupportedHostAuthenticationTypes** The defined property values are listed in Table 85. The enumeration literal shall specify supported authentication types for hosts (servers) or initiator endpoints.

**Table 85:** SupportedHostAuthenticationTypes property values

string	Description
None	This enumeration literal specifies No authentication.
Password	This enumeration literal specifies Password/shared-secret: Absent an distributed authentication infrastructure, this is what is typically done.
PKI	This enumeration literal specifies a Public Key Infrastructure. Customers with the highest assurance requirements roll PKI out to hosts and users (it is more common for hosts than users. User PKI-based authentication has significant operational complications and administrative overheads, e.g., smart cards may be involved.

string	Description
Ticket	This enumeration literal specifies Ticket-based
	(e.g., Kerberos): This is the most common class
	of authentication infrastructure used in
	enterprises. Kerberos is the best known
	example, and Windows usage of that via Active
	Directory is so widely deployed as to be a de
	facto standard. In other areas (e.g., academia)
	there are comparable ticket-based systems.

**9.6.10.4.5 SupportedMediaEncryptionStrengths** The defined property values are listed in Table 86. The enumeration literal shall specify supported key sizes in a symmetric encryption algorithm (AES) for media encryption.

**Table 86:** SupportedMediaEncryptionStrengths property values

string	Description
Bits_0	This enumeration literal specifies that there is no key.
Bits_112	This enumeration literal specifies a 3DES 112 bit key.
Bits_128	This enumeration literal specifies an AES 128 bit key.
Bits_192	This enumeration literal specifies an AES 192 bit key.
Bits_256	This enumeration literal specifies an AES 256 bit key.

**9.6.10.4.6 SupportedSecureChannelProtocols** The defined property values are listed in Table 87. The enumeration literal shall specify supported protocols that provide encrypted communication.

**Table 87:** SupportedSecureChannelProtocols property values

string	Description
IPsec	This enumeration literal specifies Internet Protocol Security (IPsec), as defined by IETF RFC 2401.
None	This enumeration literal specifies no encryption.
RPCSEC_GSS	This enumeration literal specifies RPC access to the Generic Security Services Application Programming Interface (GSS-API), as defined by IETF RPC 2203.
TLS	This enumeration literal specifies Transport Layer Security (TLS), as defined by IETF RFC 5246.

**9.6.10.4.7 SupportedUserAuthenticationTypes** The defined property values are listed in Table 88. The enumeration literal shall specify supported authentication types for users (or programs).

 Table 88:
 SupportedUserAuthenticationTypes property values

string	Description
None	This enumeration literal specifies No authentication.
Password	This enumeration literal specifies Password/shared-secret: Absent an distributed authentication infrastructure, this is what is typically done.

string	Description
PKI	This enumeration literal specifies a Public Key Infrastructure. Customers with the highest assurance requirements roll PKI out to hosts and users (it is more common for hosts than users. User PKI-based authentication has significant operational complications and administrative overheads, e.g., smart cards may be involved.
Ticket	This enumeration literal specifies Ticket-based (e.g., Kerberos): This is the most common class of authentication infrastructure used in enterprises. Kerberos is the best known example, and Windows usage of that via Active Directory is so widely deployed as to be a de facto standard. In other areas (e.g., academia) there are comparable ticket-based systems.

### 9.6.11 DataStorageLineOfService 1.3.1

**9.6.11.1 Description** This structure may be used to describe a service option covering storage provisioning and availability.

**9.6.11.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/DataStorageServices/{StorageServiceId}/LinesOfService/DataStorageLinesOfService/{DataStorageLinesOfService}

**9.6.11.3 Properties** The properties defined for the DataStorageLineOfService 1.3.1 schema are summarized in Table 89.

 Table 89:
 DataStorageLineOfService 1.3.1 properties

_	_	Attribu	
Property	Туре	tes	Notes
AccessCapabilities (v1.1+)	array (string (enum))	read-w rite(null)	Each entry specifies a required storage access capability. For the possible property values, see Access Capabilities in Property details.
<b>Actions</b> (v1.3+) {}	object		The Actions property shal contain the available actions for this resource.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
IsSpaceEfficient	boolean	read-w rite (null)	A value of true shall indicate that the storage is compressed or deduplicated. The default value for this property is false.
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe derequirements. For property details, see Oem.
ProvisioningPolicy	string (enum)	read-w rite(null)	The enumeration literal shall define the provisioning policy for storage. For the possible property values, see ProvisioningPolicy in Property details.
RecoverableCapacityS ourceCount (v1.2+)	integer	read-w rite (null)	The value is minimum required number of available capacity source resources that shall be available in the event that an equivalent capacity source resource fails. It is assumed that drives and memory components cabe replaced, repaired or otherwise added to increase an associated resource's RecoverableCapacitySourceCount.

		Attribu	
Property	Type	tes	Notes
	.,,,,,		
RecoveryTimeObjectiv	string	read-w	The enumeration literal
es	(enum)	rite(null)	specifies the time after a
			disaster that the client
			shall regain conformant
			service level access to the
			primary store, typical
			values are "immediate" o
			"offline". The expectation
			is that the services
			required to implement
			this capability are part of
			the advertising system.
			For the possible property
			values, see
			RecoveryTimeObjectives
			in Property details.

# 9.6.11.4 Property details

**9.6.11.4.1 AccessCapabilities** The defined property values are listed in Table 90. Each entry specifies a required storage access capability.

**Table 90:** AccessCapabilities property values

string	Description
Append	This enumeration literal shall indicate that the storage may be written only to append.
Execute	This value shall indicate that Execute access is allowed by the file share.
Read	This enumeration literal shall indicate that the storage may be read.
Streaming	This enumeration literal shall indicate that the storage may be read sequentially.

string	Description
Write	This enumeration literal shall indicate that the storage may be written multiple times.
WriteOnce	This enumeration literal shall indicate that the storage may be written only once.

**9.6.11.4.2 ProvisioningPolicy** The defined property values are listed in Table 91. The enumeration literal shall define the provisioning policy for storage.

**Table 91:** ProvisioningPolicy property values

string	Description
Fixed	This enumeration literal specifies storage shall be fully allocated.
Thin	This enumeration literal specifies storage may be over allocated.

**9.6.11.4.3 RecoveryTimeObjectives** The defined property values are listed in Table 92. The enumeration literal specifies the time after a disaster that the client shall regain conformant service level access to the primary store, typical values are "immediate" or "offline". The expectation is that the services required to implement this capability are part of the advertising system.

Table 92: RecoveryTimeObjectives property values

string	Description
Nearline	Access to a replica shall be consistent with
	switching access to a different path through a
	different front-end interconnection
	infrastructure. Some inconsistency may occur.
	A restore step may be required before recovery
	can commence.

string	Description
Offline	Access to a replica may take a significant amount of time. No direct connection to the replica is assumed. Some inconsistency loss may occur. A restore step is likely to be required.
OnlineActive	Access to synchronous replicas shall be instantaneous.
OnlinePassive	Access to a synchronous replica shall be consistent with switching access to a different path the same front-end interconnect. A restore step shall not be required.

### 9.6.12 DataStorageLoSCapabilities 1.2.2

**9.6.12.1 Description** Each instance of DataStorageLoSCapabilities describes capabilities of the system to support various data storage service options.

**9.6.12.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/DataStorageLoSCapabilities

**9.6.12.3 Properties** The properties defined for the DataStorageLoSCapabilities 1.2.2 schema are summarized in Table 93.

**Table 93:** DataStorageLoSCapabilities 1.2.2 properties

		Attribu	
Property	Туре	tes	Notes
<b>Actions</b> (v1.1+) {}	object		The Actions property shall contain the available actions for this resource.

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Identifier {}	object		The value shall be unique within the managed ecosystem. For property details, see Identifier v1.18.0).
MaximumRecoverableCa pacitySourceCount (v1.2+)	integer	read-w rite (null)	The maximum number of capacity source resources that can be supported for the purpose of recovery when in the event that an equivalent capacity source resource fails.
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe described requirements. For property details, see Oem.
SupportedAccessCapab ilities []	array (string (enum))	read-w rite(null)	Each entry specifies a storage access capability. For the possible property values, see SupportedAccessCapabil ities in Property details.
SupportedLinesOfServ ice [ {	array		The collection shall contain known and supported DataStorageLinesOfService.
@odata.id	string	read-w rite	Link to a  DataStorageLineOfServi ce resource. See the Links section and the  DataStorageLineOfServ ice schema for details.

		Attribu	
Property	Туре	tes	Notes
SupportedProvisionin gPolicies []	array (string (enum))	read-w rite(null)	This collection specifies supported storage allocation policies. For the possible property values, see SupportedProvisioningP olicies in Property details.
SupportedRecoveryTim eObjectives []	array (string (enum))	read-w rite(null)	This collection specifies supported expectations for time to access the primary store after recovery. For the possible property values, see SupportedRecoveryTimeObjectives in Property details.
SupportsSpaceEfficie ncy	boolean	read-w rite (null)	The value specifies whether storage compression or deduplication is supported. The default value for this property is false.

# 9.6.12.4 Property details

**9.6.12.4.1 SupportedAccessCapabilities** The defined property values are listed in Table 94. Each entry specifies a storage access capability.

**Table 94:** SupportedAccessCapabilities property values

string	Description
Append	This enumeration literal shall indicate that the storage may be written only to append.
Execute	This value shall indicate that Execute access is allowed by the file share.
Read	This enumeration literal shall indicate that the storage may be read.
Streaming	This enumeration literal shall indicate that the storage may be read sequentially.
Write	This enumeration literal shall indicate that the storage may be written multiple times.
WriteOnce	This enumeration literal shall indicate that the storage may be written only once.

**9.6.12.4.2 SupportedProvisioningPolicies** The defined property values are listed in Table 95. This collection specifies supported storage allocation policies.

**Table 95:** SupportedProvisioningPolicies property values

string	Description
Fixed	This enumeration literal specifies storage shall be fully allocated.
Thin	This enumeration literal specifies storage may be over allocated.

**9.6.12.4.3 SupportedRecoveryTimeObjectives** The defined property values are listed in Table 96. This collection specifies supported expectations for time to access the primary store after recovery.

**Table 96:** SupportedRecoveryTimeObjectives property values

string	Description
Nearline	Access to a replica shall be consistent with switching access to a different path through a different front-end interconnection infrastructure. Some inconsistency may occur. A restore step may be required before recovery can commence.
Offline	Access to a replica may take a significant amount of time. No direct connection to the replica is assumed. Some inconsistency loss may occur. A restore step is likely to be required.
OnlineActive	Access to synchronous replicas shall be instantaneous.
OnlinePassive	Access to a synchronous replica shall be consistent with switching access to a different path the same front-end interconnect. A restore step shall not be required.

# 9.6.13 FeaturesRegistry 1.2.0

**9.6.13.1 Description** This resource shall be used to represent a Feature registry for a Redfish implementation.

**9.6.13.2 Properties** The properties defined for the FeaturesRegistry 1.2.0 schema are summarized in Table 97.

**Table 97:** FeaturesRegistry 1.2.0 properties

		Attribu	
Property	Туре	tes	Notes
Actions {}	object		The Actions property shal contain the available actions for this resource.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
FeatureMappings (v1.2+) [{	array	requir ed	The pattern property shall represent the suffix to be used in the Featureld and shall be unique within this message registry. This may contain both standard and OEM-defined features.
CorrespondingProfile Definition (v1.2+)	string	read-o nly require d (null)	The value shall define a profile definition that contains the named profile declaration.
<b>Description</b> (v1.2+)	string	read-o nly require d (null)	The value shall be a detailed description of the feature.
FeatureName (v1.2+)	string	read-o nly require d (null)	The value shall be the unique name of the feature prefixed by the defining organization separated by a period (e.g. "vendor.feature").

		Attribu	
Property	Туре	tes	Notes
Resources (v1.2+) []	array (string)	read-o nly	The value shall contain ar array of resources in the service containing the set that are related to support for the specified feature. For globally applied features, implementations should not implement the Resources property for the specified feature.
Version (v1.2+)	string	read-o nly require d (null)	The value shall uniquely identify the version of the feature, using the major.minor.errata format.
}]			
Features (deprecated v1.2) [ {	array		The pattern property shal represent the suffix to be used in the Featureld and shall be unique within this message registry.  Deprecated in v1.2 and later. This property is deprecated in favor of the FeatureMappings property.
CorrespondingProfile Definition	string	read-o nly require d (null)	If present, the value shall define a profile definition that contains the named profile declaration.
Description	string	read-o nly require d (null)	The value shall be a detailed description of the feature.

		Attribu	
Property	Туре	tes	Notes
FeatureName	string	read-o nly require d (null)	The value shall be the unique name of the feature prefixed by the defining organization separated by a period (e.g. "vendor.feature").
Version	string	read-o nly require d (null)	The value shall uniquely identify the version of the feature, using the major.minor.errata format.
}]			
FeaturesUsed (v1.2+) []	array (string, null)	read-o nly require d	The property shall contain an array of all the standard feature names defined in the registry.  OEM feature names shall be defined on the OEMFeaturesUsed property.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Language	string	read-o nly require d	The value of this property shall be a string consisting of an RFC 5646 language code.

		Attribu	
Property	Туре	tes	Notes
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
OEMFeaturesUsed (v1.2+)	array (string, null)	read-o nly	The property shall contain an array of all the OEM feature names defined in the registry.
OwningEntity	string	read-o nly require d	The value of this property shall be a string that represents the publisher of this registry.
RegistryPrefix	string	read-o nly require d	The value of this property shall be the prefix used in IDs which uniquely identifies all of the Features in this registry as belonging to this registry.

		Attribu	
Property	Type	tes	Notes
RegistryVersion	string	read-o nly require d	The value of this property shall be the version of this message registry. The format of this string shall be of the format majorversion.minorvers ion.errata.

#### 9.6.14 FileShare 1.3.0

**9.6.14.1 Description** This resource shall be used to represent a shared set of files with a common directory structure.

**9.6.14.2 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemsId}/ExportedFileShares/{ExportedId}/redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemsId}/ExportedFileShares/{ExportedFileShares/{ExportedFileShares/{ExportedFileShares/{ExportedFileShares/{ExportedFileShares/{FileSystemsId}/ExportedFileShares/{FileSystemsId}/ExportedFileShares/{FileSystemsId}/ExportedFileShares/

**9.6.14.3 Properties** The properties defined for the FileShare 1.3.0 schema are summarized in Table 98.

Table 98: FileShare 1.3.0 properties

		Attribu	
Property	Туре	tes	Notes
<b>Actions</b> (v1.1+) {}	object		The Actions property shall contain the available
			actions for this resource.

		Attribu	
Property	Туре	tes	Notes
CASupported	boolean	read-w rite (null)	The value of this property shall indicate that Continuous Availability is supported. Client/Server mediated recovery from network and server failure with application transparency. This property shall be NULL unless the FileSharingProtocols property includes SMB. The default value for this property is false.
DefaultAccessCapabil ities []	array (string (enum))	read-o nly (null)	The value of this property shall be an array containing entries for the default access capabilities for the file share. Each entry shall specify a default access privilege. The types of default access can include Read, Write, and/or Execute. For the possible property values, see  DefaultAccessCapabilit ies in Property details.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
EthernetInterfaces {	object		The value shall be a link to an EthernetInterfaceColle ction with members that provide access to the file share.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
ExecuteSupport	boolean	read-o nly (null)	The value of this property shall indicate whether Execute access is supported by the file share. The default value for this property is false.
FileSharePath	string	read-o nly (null)	The value of this property shall be a path (relative to the file system root) to the exported file or directory on the file system where this file share is hosted.

		Attribu	
Property	Туре	tes	Notes
FileShareQuotaType	string (enum)	read-w rite(null)	If FileShareQuotaType is present, a value of Soft shall specify that quotas are not enforced, and a value of Hard shall specify that writes shall fail if the space consumed would exceed the value of the FileShareTotalQuotaByt es property. For the possible property values, see FileShareQuotaType in Property details.
FileShareRemainingQu otaBytes	integer (By)	read-o nly (null)	If present, the value of this property shall indicate the remaining number of bytes that may be consumed by this file share.
FileShareTotalQuotaB ytes	integer (By)	read-w rite(null)	If present, the value of this property shall indicate the maximum number of bytes that may be consumed by this file share.

Duamantu	Torre	Attribu	Natar
Property	Туре	tes	Notes
FileSharingProtocols []	array (string (enum))	read-o nly (null)	This property shall be an array containing entries for the file sharing protocols supported by this file share. Each entry shall specify a file sharing protocol supported by the file system. For the possible property values, see FileSharingProtocols in Property details.
ld	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Links {	object		The Links property, as described by the Redfish Specification, shall contain references to resources that are related to, but not contained by (subordinate to), this resource.
ClassOfService {	object		This value shall be a link to the ClassOfService for this file share. See the <i>ClassOfService</i> schema for details on this property.
@odata.id	string	read-o nly	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.

		Attribu	
Property	Туре	tes	Notes
}			
FileSystem {	object		The value shall be a link to the file system containing the file share. See the <i>FileSystem</i> schema for details on thi property.
@odata.id	string	read-o nly	Link to a FileSystem resource. See the Links section and the <i>FileSystem</i> schema for details.
}			
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
}			

Property	Туре	Attribu tes	Notes
LowSpaceWarningThres holdPercents []	array (%) (integer , null)	read-w rite	This property shall be an array containing entries for the percentages of file share capacity at which low space warning events are be issued. A LOW_SPACE_THRESHOLD _WARNING event shall be triggered each time the remaining file share capacity value becomes less than one of the values in the array. The following shall be true: Across all CapacitySources entries, percent = (SUM(AllocatedBytes) - SUM(ConsumedBytes))/SUM(AllocatedBytes).
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.

		Attribu	
Property	Type	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
RemainingCapacityPer cent (v1.1+)	integer	read-o nly (null)	If present, this value shall return {[(SUM(AllocatedBytes) - SUM(ConsumedBytes)]/S UM(AllocatedBytes)}*1 00 represented as an integer value.
ReplicationEnabled (v1.3+)	boolean	read-w rite (null)	The property shall indicate whether or not replication is enabled on the file share. This property shall be consistent with the state reflected at the storage pool level.
RootAccess	boolean	read-o nly (null)	The value of this property shall indicate whether Root access is allowed by the file share. The default value for this property is false.

		Attribu	
Property	Туре	tes	Notes
Status {}	object		This value of this property shall indicate the status of the file share. For property details, see Status.
WritePolicy	string (enum)	read-o nly (null)	The value of this property shall define how writes are replicated to the shared source. For the possible property values, see WritePolicy in Property details.

# 9.6.14.4 Property details

**9.6.14.4.1 DefaultAccessCapabilities** The defined property values are listed in Table 99. The value of this property shall be an array containing entries for the default access capabilities for the file share. Each entry shall specify a default access privilege. The types of default access can include Read, Write, and/or Execute.

**Table 99:** DefaultAccessCapabilities property values

string	Description
Append	This enumeration literal shall indicate that the storage may be written only to append.
Execute	This value shall indicate that Execute access is allowed by the file share.
Read	This enumeration literal shall indicate that the storage may be read.
Streaming	This enumeration literal shall indicate that the storage may be read sequentially.
Write	This enumeration literal shall indicate that the storage may be written multiple times.

216

string	Description
WriteOnce	This enumeration literal shall indicate that the storage may be written only once.

**9.6.14.4.2 FileShareQuotaType** The defined property values are listed in Table 100. If FileShareQuotaType is present, a value of Soft shall specify that quotas are not enforced, and a value of Hard shall specify that writes shall fail if the space consumed would exceed the value of the FileShareTotalQuotaBytes property.

**Table 100:** FileShareQuotaType property values

string	Description
Hard	This value shall indicate that quotas are enabled and enforced.
Soft	This value shall indicate that quotas are enabled but not enforced.

**9.6.14.4.3 FileSharingProtocols** The defined property values are listed in Table 101. This property shall be an array containing entries for the file sharing protocols supported by this file share. Each entry shall specify a file sharing protocol supported by the file system.

**Table 101:** FileSharingProtocols property values

string	Description
NFSv3	This value shall indicate that NFSv3, as defined in RFC 1813, is supported by the file system.
NFSv4_0	This value shall indicate that NFSv4, as defined in RFC 7530, is supported by the file system.
NFSv4_1	This value shall indicate that NFSv4.1, as defined in RFC 5661, is supported by the file system.

string	Description
SMBv2_0	This value shall indicate that Server Message Block version 2.0 is supported by the file system.
SMBv2_1	This value shall indicate that Server Message Block version 2.1 is supported by the file system.
SMBv3_0	This value shall indicate that Server Message Block version 3.0 is supported by the file system.
SMBv3_0_2	This value shall indicate that Server Message Block version 3.0.2 is supported by the file system.
SMBv3_1_1	This value shall indicate that Server Message Block version 3.1.1 is supported by the file system.

**9.6.14.4.4 WritePolicy** The defined property values are listed in Table 102. The value of this property shall define how writes are replicated to the shared source.

**Table 102:** WritePolicy property values

string	Description
Active	This enumeration literal shall indicate Active-Active (i.e. bidirectional) synchronous updates.
Adaptive	This enumeration literal shall indicate that an implementation may switch between synchronous and asynchronous modes.
Asynchronous	This enumeration literal shall indicate Asynchronous updates.
Synchronous	This enumeration literal shall indicate Synchronous updates.

### 9.6.15 FileShareCollection

**9.6.15.1 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemsId}/ExportedFileShares /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemsId}/ExportedFileShares

**9.6.15.2 Properties** The properties defined for the FileShareCollection schema are summarized in Table 103.

**Table 103:** FileShareCollection properties

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		This property shall contain references to the members of this FileSystem collection.
@odata.id	string	read-o nly	Link to a FileShare resource. See the Links section and the <i>FileShare</i> schema for details.
}]			
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.

		Attribu	
Property	Туре	tes	Notes
Name	string	read-o nly	This property shall contain the name of this resource or array membe The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

### 9.6.16 FileSystem 1.4.1

**9.6.16.1 Description** This resource shall be used to represent an instance of a hierarchical namespace of files.

**9.6.16.2 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId} /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}

**9.6.16.3 Properties** The properties defined for the FileSystem 1.4.1 schema are summarized in Table 104.

 Table 104: FileSystem 1.4.1 properties

		Attribu	
Property	Туре	tes	Notes
AccessCapabilities []	array (string (enum))	read-w rite(null)	This property shall be an array containing entries for the supported IO access capabilities. Each entry shall specify a current storage access capability. For the possible property values, see Access Capabilities in Property details.
<b>Actions</b> (v1.1+) {}	object		The Actions property sha contain the available actions for this resource.
BlockSizeBytes	integer (By)	read-o nly (null)	The value of this property shall be the block size of the file system in bytes.
Capacity {}	object		The value of this property shall be the capacity allocated to the file system in bytes. For property details, see Capacity v1.0.0).
CapacitySources [ {	array		This property shall be an array containing entries for all the capacity sources for the file system. Each entry shall provide capacity allocation information from a named resource.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string	read-w rite	Link to a CapacitySource resource. See the Links section and the <i>CapacitySource</i> schema for details.
}]			
CasePreserved	boolean	read-w rite (null)	This property shall indicate that the case of file names is preserved by the file system. A value of True shall indicate that case of file names shall by preserved.
CaseSensitive	boolean	read-w rite (null)	This property shall indicate that case sensitive file names are supported by the file system. A value of True shall indicate that file names are case sensitive.
CharacterCodeSet []	array (string (enum))	read-w rite(null)	This property shall be an array containing entries for the character sets or encodings supported by the file system. Each entry shall specify a character set encoding supported by the file system. For the possible property values, see CharacterCodeSet in Property details.

		Attribu	
Property	Туре	tes	Notes
ClusterSizeBytes	integer (By)	read-w rite(null)	This value shall specify the minimum file allocation size imposed by the file system. This minimum allocation size shall be the smallest amount of storage allocated to a file by the file system. Under stress conditions, the file system may allocate storage in amounts smaller than this value.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification
ExportedShares {	object		This property shall be an array of exported file shares of this file system. Each entry shall define a exported file share of this file system. Contains a link to a resource.
@odata.id	string	read-w rite	Link to Collection of FileShare. See the FileShare schema for details.
}			

		Attribu	
Property	Туре	tes	Notes
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Identifiers (v1.1.1+) [ { } ]	array (object)		This property shall contain a list of all known durable names for this file system. For property details, see Identifier v1.18.0).
ImportedShares (v1.0.1+)	array		The value shall be an array of imported file shares.
ImportedShare		read-w rite	
}]			
IOStatistics (v1.2+, deprecated v1.4) {}	object		The value shall represent IO statistics for this FileSystem. For property details, see IOStatistics. Deprecated in v1.4 and later. This property is deprecated in favor of the IOStatistics property in FileSystemMetrics.
Links {	object		This property shall contain links to other resources that are related to this resource.

		Attribu	
Property	Туре	tes	Notes
ClassOfService {	object		This value shall be a link to the ClassOfService for this file system. See the <i>ClassOfService</i> schema for details on this property.
@odata.id	string	read-o nly	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.
}			
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
ReplicaCollection [ {	array		This property shall be an array of links to replicas for this file system. Each entry shall be a link to a replica for this file system.
@odata.id	string	read-o nly	Link to another
			FileSystem resource.
}]			

		Attribu	
Property	Туре	tes	Notes
SpareResourceSets (v1.2+) [ {	array		Each referenced SpareResourceSet shall contain resources that may be utilized to replace the capacity provided by a failed resource having a compatible type.
@odata.id  }]  }	string	read-w rite	Link to a SpareResourceSet resource. See the Links section and the SpareResourceSet schema for details.
LowSpaceWarningThres holdPercents []	array (%) (integer , null)	read-w rite	This property shall be an array containing entries for the percentages of file system capacity at which low space warning events are be issued. LOW_SPACE_THRESHOLD _WARNING event shall be triggered each time the remaining file system capacity value becomes less than one of the values in the array. The following shall be true:  Across all  CapacitySources entries, percent =  (SUM(AllocatedBytes) -  SUM(ConsumedBytes))/SM(AllocatedBytes).

	<u> </u>	Attribu	
Property	Туре	tes	Notes
MaxFileNameLengthByt es	integer (By)	read-w rite(null)	If specified, this value shall specify the maximum length of a file name within the file system.
<b>Metrics</b> (v1.4+) {	object	* (null) *	This property shall contain a link to a resource of type FileSystemMetrics that specifies the metrics for this file system. IO metrics are reported in the IOStatistics property. See the FileSystemMetrics schema for details on this property.
@odata.id	string	read-o nly	Link to a FileSystemMetrics resource. See the Links section and the FileSystemMetrics schema for details.
} Name	string	read-o nly require d	This property shall contain the name of this resource or array member The value shall conform with the "Name" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
RecoverableCapacityS	integer	read-w	The value is the number
ourceCount (v1.2+)		rite (null)	of available capacity source resources currently available in the event that an equivalent capacity source resource fails.
RemainingCapacity {}	object		The value of this property shall be the remaining capacity allocated to the file system in bytes. For property details, see Capacity v1.0.0).
RemainingCapacityPer cent (v1.1+)	integer	read-o nly (null)	If present, this value shall return {[(SUM(AllocatedBytes) - SUM(ConsumedBytes)]/S UM(AllocatedBytes)}*1 00 represented as an integer value.

		Attribu	
Property	Туре	tes	Notes
ReplicaInfo {	object		If this file system is a replica, this value shall describe its replication attributes. This value shall not be present if this file system is not a replica. A file system may be both a source and a replica. See the StorageReplicaInfo schema for details on this property.
@odata.id	string	read-o nly	Link to a ReplicaInfo resource. See the Links section and the StorageReplicaInfo schema for details.
}			
ReplicaTargets (v1.2.1+) [ {	array		The value shall reference the target replicas that are sourced by this replica.
@odata.id }]	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.

		Attribu	
Property	Туре	tes	Notes
ReplicationEnabled (v1.3+)	boolean	read-w rite (null)	The property shall indicate whether or not replication is enabled or the file system. This property shall be consistent with the state reflected at the storage pool level.

# 9.6.16.4 Property details

**9.6.16.4.1 AccessCapabilities** The defined property values are listed in Table 105. This property shall be an array containing entries for the supported IO access capabilities. Each entry shall specify a current storage access capability.

**Table 105:** AccessCapabilities property values

string	Description
Append	This enumeration literal shall indicate that the storage may be written only to append.
Execute	This value shall indicate that Execute access is allowed by the file share.
Read	This enumeration literal shall indicate that the storage may be read.
Streaming	This enumeration literal shall indicate that the storage may be read sequentially.
Write	This enumeration literal shall indicate that the storage may be written multiple times.
WriteOnce	This enumeration literal shall indicate that the storage may be written only once.

**9.6.16.4.2 CharacterCodeSet** The defined property values are listed in Table 106. This property shall be an array containing entries for the character sets or encodings supported by the file system. Each entry shall specify a character set encoding supported by the file system.

**Table 106:** CharacterCodeSet property values

string	Description
ASCII	This value shall indicate that the ASCII character encoding is supported by the file system.
ExtendedUNIXCode	This value shall indicate that Extended Unix Code character encoding is supported by the file system.
ISO2022	This value shall indicate that ISO-2022 character encoding is supported by the file system.
ISO8859_1	This value shall indicate that ISO-8859-1 character encoding is supported by the file system.
UCS_2	This value shall indicate that the UCS-2 character encoding is supported by the file system.
Unicode	This value shall indicate that Unicode character encoding is supported by the file system.
UTF_16	This value shall indicate that the UTF-16 character encoding is supported by the file system.
UTF_8	This value shall indicate that the UTF-8 character encoding is supported by the file system.

### 9.6.17 FileSystemCollection

**9.6.17.1 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/redfish/v1/StorageServices/{StorageServiceId}/

**9.6.17.2 Properties** The properties defined for the FileSystemCollection schema are summarized in Table 107.

Table 107: FileSystemCollection properties

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		This property shall contain references to the members of this FileSystem collection.
@odata.id	string	read-o nly	Link to a FileSystem resource. See the Links section and the <i>FileSystem</i> schema for details.
}]			
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.
Name	string	read-o nly	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.

		Attribu	
Property	Type	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

#### 9.6.18 FileSystemMetrics 1.0.1

**9.6.18.1 Description** The FileSystemMetrics schema shall contain the usage and health statistics for a file system in a Redfish implementation.

**9.6.18.2 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/Metrics /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/Metrics

**9.6.18.3 Properties** The properties defined for the FileSystemMetrics 1.0.1 schema are summarized in Table 108.

Table 108: FileSystemMetrics 1.0.1 properties

		Attribu	
Property	Туре	tes	Notes
Actions {}	object		This property shall contain the available actions for this resource.

		Attribu		
Property	Туре	tes	Notes	
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.	
ld	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.	
IOStatistics {}	object		The value shall represent IO statistics for this file system. For property details, see IOStatistics.	
Name	string	read-o nly require d	This property shall contain the name of this resource or array membe The value shall conform with the "Name" clause of the Redfish Specification.	
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.	

# 9.6.19 HostedStorageServices

**9.6.19.1 URIs** /redfish/v1/Systems/{ComputerSystemId}/HostedServices

**9.6.19.2 Properties** The properties defined for the HostedStorageServices schema are summarized in Table 109.

**Table 109:** HostedStorageServices properties

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		The value of each member entry shall reference a StorageService resource.
@odata.id	string	read-o nly	Link to a StorageService resource. See the Links section and the <i>StorageService</i> schema for details.
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.

Property	Туре	Attribu tes	Notes
Name	string	read-o nly	This property shall contain the name of this resource or array members. The value shall conform with the "Name" clause of the Redfish Specification.
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

# 9.6.20 IOConnectivityLineOfService 1.2.1

**9.6.20.1 Description** An IO connectivity service option may be used to specify the characteristics of storage connectivity.

**9.6.20.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/IOConnectivityLinesOfService/{IOConnectivityLinesOfService/{IOConnectivityLinesOfService/}}

**9.6.20.3 Properties** The properties defined for the IOConnectivityLineOfService 1.2.1 schema are summarized in Table 110.

**Table 110:** IOConnectivityLineOfService 1.2.1 properties

Droporty	Time	Attribu	Notes
Property	Туре	tes	Notes
AccessProtocols []	array (string (enum))	read-w rite(null)	The Enumeration Literal shall specify the Access protocol for this service option. NOTE: If multiple protocols are specified, the corresponding MaxSupportedIOPS governs the max achieved across all protocol uses. This may be less than the sum of the individual max values which may be specified by individual Line of Service entries. For the possible property values, see AccessProtocols in Property details.
<b>Actions</b> (v1.2+) {}	object		The Actions property shall contain the available actions for this resource.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.

Property	Type	Attribu tes	Notes
MaxBytesPerSecond (v1.1+)	integer (By/s)	read-w rite(null)	The value shall be the maximum bytes per second that a connection can support.
MaxIOPS (v1.1+)	integer ([IO]/ s)	read-w rite(null)	The value shall be the maximum IOs per second that the connection shall allow for the selected access protocol.
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

### 9.6.20.4 Property details

**9.6.20.4.1 AccessProtocols** The defined property values are listed in Table 111. The Enumeration Literal shall specify the Access protocol for this service option. NOTE: If multiple protocols are specified, the corresponding MaxSupportedIOPS governs the max achieved across all protocol uses. This may be less than the sum of the individual max values, which may be specified by individual Line of Service entries.

 Table 111: AccessProtocols property values

AHCI This value shall indicate conformance to the Intel Advanced Host Controller Interface (AHCI) Specification.  CXL This value shall indicate conformance to the Compute Express Link Specification.  DisplayPort This value shall indicate conformance to the VESA DisplayPort Specification.  DVI This value shall indicate conformance to the Digital Display Working Group DVI-A, DVI-D, or DVI-I Specification.  Ethernet This value shall indicate conformance to the IEEE 802.3 Ethernet specification.  FC This value shall indicate conformance to the T11 Fibre Channel Physical and Signaling Interface Specification.  FCP This value shall indicate conformance to the T11 FC-BB-5 Specification.  FCP This value shall indicate conformance to the INCITS 481: Information Technology - Fibre Channel Protocol for SCSI.  FICON This value shall indicate conformance to the ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.  FTP This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).  GenZ This value shall indicate conformance to the Gen-Z Core Specification.  HDMI This value shall indicate conformance to the HDMI Forum HDMI Specification.	string	Description
Compute Express Link Specification.  DisplayPort This value shall indicate conformance to the VESA DisplayPort Specification.  DVI This value shall indicate conformance to the Digital Display Working Group DVI-A, DVI-D, or DVI-I Specification.  Ethernet This value shall indicate conformance to the IEEE 802.3 Ethernet specification.  FC This value shall indicate conformance to the T11 Fibre Channel Physical and Signaling Interface Specification.  FCOE This value shall indicate conformance to the T11 FC-BB-5 Specification.  FCP This value shall indicate conformance to the INCITS 481: Information Technology - Fibre Channel Protocol for SCSI.  FICON This value shall indicate conformance to the ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.  FTP This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).  GenZ This value shall indicate conformance to the Gen-Z Core Specification.	AHCI	Intel Advanced Host Controller Interface (AHCI)
VESA DisplayPort Specification.  DVI This value shall indicate conformance to the Digital Display Working Group DVI-A, DVI-D, or DVI-I Specification.  Ethernet This value shall indicate conformance to the IEEE 802.3 Ethernet specification.  FC This value shall indicate conformance to the T11 Fibre Channel Physical and Signaling Interface Specification.  FCOE This value shall indicate conformance to the T11 FC-BB-5 Specification.  FCP This value shall indicate conformance to the INCITS 481: Information Technology - Fibre Channel Protocol for SCSI.  FICON This value shall indicate conformance to the ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.  FTP This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).  GenZ This value shall indicate conformance to the Gen-Z Core Specification.	CXL	
Digital Display Working Group DVI-A, DVI-D, or DVI-I Specification.  Ethernet This value shall indicate conformance to the IEEE 802.3 Ethernet specification.  FC This value shall indicate conformance to the T11 Fibre Channel Physical and Signaling Interface Specification.  FCOE This value shall indicate conformance to the T11 FC-BB-5 Specification.  FCP This value shall indicate conformance to the INCITS 481: Information Technology - Fibre Channel Protocol for SCSI.  FICON This value shall indicate conformance to the ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.  FTP This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).  GenZ This value shall indicate conformance to the Gen-Z Core Specification.	DisplayPort	
IEEE 802.3 Ethernet specification.  FC This value shall indicate conformance to the T11 Fibre Channel Physical and Signaling Interface Specification.  FCOE This value shall indicate conformance to the T11 FC-BB-5 Specification.  FCP This value shall indicate conformance to the INCITS 481: Information Technology - Fibre Channel Protocol for SCSI.  FICON This value shall indicate conformance to the ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.  FTP This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).  GenZ This value shall indicate conformance to the Gen-Z Core Specification.  HDMI This value shall indicate conformance to the	DVI	Digital Display Working Group DVI-A, DVI-D, or
T11 Fibre Channel Physical and Signaling Interface Specification.  FCOE  This value shall indicate conformance to the T11 FC-BB-5 Specification.  FCP  This value shall indicate conformance to the INCITS 481: Information Technology - Fibre Channel Protocol for SCSI.  FICON  This value shall indicate conformance to the ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.  FTP  This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).  GenZ  This value shall indicate conformance to the Gen-Z Core Specification.  This value shall indicate conformance to the	Ethernet	
T11 FC-BB-5 Specification.  FCP This value shall indicate conformance to the INCITS 481: Information Technology - Fibre Channel Protocol for SCSI.  FICON This value shall indicate conformance to the ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.  FTP This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).  GenZ This value shall indicate conformance to the Gen-Z Core Specification.  HDMI This value shall indicate conformance to the	FC	T11 Fibre Channel Physical and Signaling
INCITS 481: Information Technology - Fibre Channel Protocol for SCSI.  FICON  This value shall indicate conformance to the ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.  FTP  This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).  GenZ  This value shall indicate conformance to the Gen-Z Core Specification.  HDMI  This value shall indicate conformance to the	FCoE	
ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.  FTP This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).  GenZ This value shall indicate conformance to the Gen-Z Core Specification.  HDMI This value shall indicate conformance to the	FCP	INCITS 481: Information Technology - Fibre
RFC114-defined File Transfer Protocol (FTP).  GenZ This value shall indicate conformance to the Gen-Z Core Specification.  HDMI This value shall indicate conformance to the	FICON	ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the
Gen-Z Core Specification.  HDMI This value shall indicate conformance to the	FTP	
	GenZ	
	НДМІ	

string	Description
НТТР	This value shall indicate conformance to the Hypertext Transport Protocol (HTTP) as defined by RFC3010 or RFC5661.
HTTPS	This value shall indicate conformance to the Hypertext Transfer Protocol Secure (HTTPS) a defined by RFC2068 or RFC2616, which uses Transport Layer Security (TLS) as defined by RFC5246 or RFC6176.
12C	This value shall indicate conformance to the NXP Semiconductors I2C-bus Specification.
InfiniBand	This value shall indicate conformance to the InfiniBand Architecture Specification-defined InfiniBand protocol.
iSCSI	This value shall indicate conformance to the IETF Internet Small Computer Systems Interface (iSCSI) Specification.
iWARP	This value shall indicate conformance to the RFC5042-defined Internet Wide Area RDMA Protocol (iWARP) that uses the transport layer mechanisms as defined by RFC5043 or RFC5044.
MultiProtocol	This value shall indicate conformance to multiple protocols.
NFSv3	This value shall indicate conformance to the RFC1813-defined Network File System (NFS) protocol.
NFSv4	Network File System (NFS) version 4.
NVLink	This value shall indicate conformance to the NVIDIA NVLink protocol.
NVMe	This value shall indicate conformance to the Non-Volatile Memory Host Controller Interface Specification.
NVMeOverFabrics	This value shall indicate conformance to the NVM Express over Fabrics Specification.

string	Description
ОЕМ	This value shall indicate conformance to an OEM-specific architecture, and the OEM section may include additional information.
PCle	This value shall indicate conformance to the PCI-SIG PCI Express Base Specification.
QPI	This value shall indicate conformance to the Intel QuickPath Interconnect (QPI) protocol.
RoCE	This value shall indicate conformance to the InfiniBand Architecture Specification-defined RDMA over Converged Ethernet Protocol.
RoCEv2	This value shall indicate conformance to the InfiniBand Architecture Specification-defined RDMA over Converged Ethernet Protocol version 2.
SAS	This value shall indicate conformance to the T10 SAS Protocol Layer Specification.
SATA	This value shall indicate conformance to the Serial ATA International Organization Serial ATA Specification.
SFTP	This value shall indicate conformance to the RFC114-defined SSH File Transfer Protocol (SFTP) that uses Transport Layer Security (TLS as defined by RFC5246 or RFC6176.
SMB	This value shall indicate conformance to the Server Message Block (SMB), or Common Internet File System (CIFS), protocol.
ТСР	This value shall indicate conformance to the IETF-defined Transmission Control Protocol (TCP). For example, RFC7414 defines the roadmap of the TCP specification.
TFTP	This value shall indicate conformance to the IETF-defined Trivial File Transfer Protocol (TFTP). For example, RFC1350 defines the core TFTP version 2 specification.

241

string	Description
UDP	This value shall indicate conformance to the IETF-defined User Datagram Protocol (UDP). For example, RFC768 defines the core UDP specification.
UHCI	This value shall indicate conformance to the Intel Universal Host Controller Interface (UHCI) Specification, Enhanced Host Controller Interface Specification, or the Extensible Host Controller Interface Specification.
UPI	This value shall indicate conformance to the Intel UltraPath Interconnect (UPI) protocol.
USB	This value shall indicate conformance to the USB Implementers Forum Universal Serial Bus Specification.
VGA	This value shall indicate conformance to the VESA SVGA Specification.

# 9.6.21 IOConnectivityLoSCapabilities 1.2.0

**9.6.21.1 Description** Each instance of IOConnectivityLoSCapabilities describes capabilities of the system to support various IO Connectivity service options.

**9.6.21.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/IOConnectivityLoSCapabilities

**9.6.21.3 Properties** The properties defined for the IOConnectivityLoSCapabilities 1.2.0 schema are summarized in Table 112.

 Table 112: IOConnectivityLoSCapabilities 1.2.0 properties

		Attribu	
Property	Туре	tes	Notes
<b>Actions</b> (v1.1+) {}	object		The Actions property shall contain the available actions for this resource.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Identifier {}	object		The value identifies this resource. The value shall be unique within the managed ecosystem. For property details, see Identifier v1.18.0).
MaxSupportedBytesPer Second	integer (By/s)	read-w rite(null)	The value shall be the maximum bytes per second that a connection can support.
MaxSupportedIOPS (v1.1+)	integer ([IO]/ s)	read-w rite(null)	The value shall be the maximum IOPS that a connection can support.

Property	Туре	Attribu tes	Notes
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
SupportedAccessProto cols []	array (string (enum))	read-w rite(null)	Access protocols supported by this service option. NOTE: SMB+NFS* requires that SMB and at least one of NFSv3 or NFXv4 are also selected, (i.e. {"SMB", "NFSv4", 'SMB+NFS'}). For the possible property values, see SupportedAccessProtoco ls in Property details.*
SupportedLinesOfServ ice [ {	array		The collection shall contain known and supported IOConnectivityLinesOfS ervice.

		Attribu	
Property	Type	tes	Notes
@odata.id	string	read-w	Link to a
		rite	IOConnectivityLineOfSe
			rvice resource. See the
			Links section and the
			IOConnectivityLineOfS
			ervice schema for details.
}]			

### 9.6.21.4 Property details

**9.6.21.4.1 SupportedAccessProtocols** The defined property values are listed in Table 113. Access protocols supported by this service option. NOTE: SMB+NFS\* requires that SMB and at least one of NFSv3 or NFXv4 are also selected, (i.e. {"SMB", "NFSv4", "SMB+NFS\*"}).

**Table 113:** SupportedAccessProtocols property values

string	Description
AHCI	This value shall indicate conformance to the Intel Advanced Host Controller Interface (AHCI) Specification.
CXL	This value shall indicate conformance to the Compute Express Link Specification.
DisplayPort	This value shall indicate conformance to the VESA DisplayPort Specification.
DVI	This value shall indicate conformance to the Digital Display Working Group DVI-A, DVI-D, or DVI-I Specification.
Ethernet	This value shall indicate conformance to the IEEE 802.3 Ethernet specification.
FC	This value shall indicate conformance to the T11 Fibre Channel Physical and Signaling Interface Specification.

string	Description		
FCoE	This value shall indicate conformance to the T11 FC-BB-5 Specification.		
FCP	This value shall indicate conformance to the INCITS 481: Information Technology - Fibre Channel Protocol for SCSI.		
FICON	This value shall indicate conformance to the ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.		
FTP	This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).		
GenZ	This value shall indicate conformance to the Gen-Z Core Specification.		
HDMI	This value shall indicate conformance to the HDMI Forum HDMI Specification.		
HTTP	This value shall indicate conformance to the Hypertext Transport Protocol (HTTP) as defined by RFC3010 or RFC5661.		
HTTPS	This value shall indicate conformance to the Hypertext Transfer Protocol Secure (HTTPS) as defined by RFC2068 or RFC2616, which uses Transport Layer Security (TLS) as defined by RFC5246 or RFC6176.		
I2C	This value shall indicate conformance to the NXP Semiconductors I2C-bus Specification.		
InfiniBand	This value shall indicate conformance to the InfiniBand Architecture Specification-defined InfiniBand protocol.		
iSCSI	This value shall indicate conformance to the IETF Internet Small Computer Systems Interface (iSCSI) Specification.		

string	Description
iWARP	This value shall indicate conformance to the RFC5042-defined Internet Wide Area RDMA Protocol (iWARP) that uses the transport layer mechanisms as defined by RFC5043 or RFC5044.
MultiProtocol	This value shall indicate conformance to multiple protocols.
NFSv3	This value shall indicate conformance to the RFC1813-defined Network File System (NFS) protocol.
NFSv4	Network File System (NFS) version 4.
NVLink	This value shall indicate conformance to the NVIDIA NVLink protocol.
NVMe	This value shall indicate conformance to the Non-Volatile Memory Host Controller Interface Specification.
NVMeOverFabrics	This value shall indicate conformance to the NVM Express over Fabrics Specification.
OEM	This value shall indicate conformance to an OEM-specific architecture, and the OEM section may include additional information.
PCIe	This value shall indicate conformance to the PCI-SIG PCI Express Base Specification.
QPI	This value shall indicate conformance to the Intel QuickPath Interconnect (QPI) protocol.
RoCE	This value shall indicate conformance to the InfiniBand Architecture Specification-defined RDMA over Converged Ethernet Protocol.
RoCEv2	This value shall indicate conformance to the InfiniBand Architecture Specification-defined RDMA over Converged Ethernet Protocol version 2.
SAS	This value shall indicate conformance to the T10 SAS Protocol Layer Specification.

string	Description
SATA	This value shall indicate conformance to the Serial ATA International Organization Serial ATA Specification.
SFTP	This value shall indicate conformance to the RFC114-defined SSH File Transfer Protocol (SFTP) that uses Transport Layer Security (TLS as defined by RFC5246 or RFC6176.
SMB	This value shall indicate conformance to the Server Message Block (SMB), or Common Internet File System (CIFS), protocol.
TCP	This value shall indicate conformance to the IETF-defined Transmission Control Protocol (TCP). For example, RFC7414 defines the roadmap of the TCP specification.
TFTP	This value shall indicate conformance to the IETF-defined Trivial File Transfer Protocol (TFTP). For example, RFC1350 defines the core TFTP version 2 specification.
UDP	This value shall indicate conformance to the IETF-defined User Datagram Protocol (UDP). For example, RFC768 defines the core UDP specification.
UHCI	This value shall indicate conformance to the Intel Universal Host Controller Interface (UHC Specification, Enhanced Host Controller Interface Specification, or the Extensible Host Controller Interface Specification.
UPI	This value shall indicate conformance to the Intel UltraPath Interconnect (UPI) protocol.
USB	This value shall indicate conformance to the USB Implementers Forum Universal Serial Bus Specification.
VGA	This value shall indicate conformance to the VESA SVGA Specification.

#### 9.6.22 IOPerformanceLineOfService 1.1.1

**9.6.22.1 Description** This structure may be used to define a service option related to IO performance.

**9.6.22.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/IOPerformanceLinesOfService/{IOPe

**9.6.22.3 Properties** The properties defined for the IOPerformanceLineOfService 1.1.1 schema are summarized in Table 114.

Table 114: IOPerformanceLineOfService 1.1.1 properties

		Attribu	
Property	Туре	tes	Notes
<b>Actions</b> (v1.1+) {}	object		The Actions property shall contain the available actions for this resource.
AverageIOOperationLa tencyMicroseconds	integer (us)	read-w rite(null)	The value shall be the expected average IO latency in microseconds calculated over sample periods (see SamplePeriodSeconds).
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.

Droporty	Tuno	Attribu	Notes
Property	Туре	tes	Notes
IOOperationsPerSecon dIsLimited	boolean	read-w rite (null)	If true, the system should not allow IOPS to exceed MaxIoOperationsPerSecondPerTerabyte * VolumeSize. Otherwise, the system shall not enforce a limit. The default value for this property is false.
IOWorkload {}	object		The value shall be a description of the expected workload. The workload provides the context in which the values of MaxIOOperationsPerSecondPerTerabyte and AverageIOOperationLate ncyMicroseconds are expected to be achievable. For property details, see IOWorkload v1.0.0).
MaxIOOperationsPerSe condPerTerabyte	integer (1/s/TBy)	read-w rite(null)	The value shall be the amount of IOPS a volume of a given committed size in Terabytes can support. This IOPS density value is useful as a metric that is independent of capacity. Cost is a function of this value and the AverageIOOperationLate ncyMicroseconds.

Property	Type	Attribu tes	Notes
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
SamplePeriod	string	read-w rite (null)	The value shall be an ISO 8601 duration specifying the sampling period over which average values are calculated.

# 9.6.23 IOPerformanceLoSCapabilities 1.3.0

**9.6.23.1 Description** Each instance of IOPerformanceLoSCapabilities shall describe the capabilities of the system to support various IO performance service options.

**9.6.23.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/IOPerformanceLoSCapabilities

**9.6.23.3 Properties** The properties defined for the IOPerformanceLoSCapabilities 1.3.0 schema are summarized in Table 115.

**Table 115:** IOPerformanceLoSCapabilities 1.3.0 properties

		Attribu		
Property	Туре	tes	Notes	
<b>Actions</b> (v1.1+) {}	object		The Actions property shall contain the available actions for this resource.	
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.	
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.	
Identifier {}	object		The value shall be unique within the managed ecosystem. For property details, see Identifier v1.18.0).	
IOLimitingIsSupporte d	boolean	read-w rite (null)	If true, the system should limit IOPS to MaxIOOperationsPerSeco ndPerTerabyte * (Volume Size in Terabytes). Otherwise, the system shall not inforce a limit. The default value for this property is false.	

		Attribu	
Property	Туре	tes	Notes
MaxSamplePeriod	string (s)	read-w rite(null)	The value shall be an ISC 8601 duration specifying the maximum sampling period over which average values are calculated.
MinSamplePeriod	string (s)	read-w rite(null)	The value shall be an ISO 8601 duration specifying the minimum sampling period over which average values are calculated.
MinSupportedIoOperat ionLatencyMicrosec- onds	integer (us)	read-w rite(null)	The value shall be the minimum supported average IO latency in microseconds calculated over the SamplePeriod.
Name	string	read-o nly require d	This property shall contain the name of this resource or array members. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe direquirements. For property details, see Oem.

		Attribu	
Property	Туре	tes	Notes
SupportedIOWorkloads [{}]	array (object)	* (null) *	The value shall be a collection of supported workloads. For property details, see IOWorkload.
SupportedLinesOfServ ice [ {	array		The value shall be a collection supported IO performance service options.
@odata.id	string	read-w rite	Link to a IOPerformanceLineOfSer vice resource. See the Links section and the IOPerformanceLineOfSe rvice schema for details.
}]			

## 9.6.24 LineOfService 1.1.0

**9.6.24.1 Description** This service option is the abstract base class for other ClassOfService and concrete lines of service.

**9.6.24.2 Properties** The properties defined for the LineOfService 1.1.0 schema are summarized in Table 116.

 Table 116: LineOfService 1.1.0 properties

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

#### 9.6.25 LineOfServiceCollection

9.6.25.1 URIs /redfish/v1/StorageServices/{StorageServices/{StorageServiceld}}/ClassesOfService/{ClassOfServiceld}}/DataProperties/v1/StorageServices/{StorageServiceld}}/ClassesOfService/{ClassOfServiceld}}/DataSecurityLinesOfServicedfish/v1/StorageServices/{StorageServiceld}}/ClassesOfService/{ClassOfServiceld}}/DataStorageLinesOfServicedfish/v1/StorageServices/{StorageServiceld}}/ClassesOfService/{ClassOfServiceld}}/IOConnectivityLinesOfS/redfish/v1/StorageServices/{StorageServiceld}}/ClassesOfService/{ClassOfServiceld}}/IOPerformanceLinesOfS/redfish/v1/StorageServices/{StorageServiceld}}/LinesOfService/redfish/v1/StorageServices/{StorageServiceld}}/LinesOfService/DataSecurityLinesOfService/redfish/v1/StorageServices/{StorageServiceld}}/LinesOfService/DataStorageLinesOfService/redfish/v1/StorageServices/{StorageServiceld}}/LinesOfService/IOConnectivityLinesOfService/redfish/v1/StorageServices/{StorageServiceld}}/LinesOfService/IOConnectivityLinesOfService/redfish/v1/StorageServices/{StorageServiceld}}/LinesOfService/IOConnectivityLinesOfService/redfish/v1/StorageServices/{StorageServiceld}}/LinesOfService/IOConnectivityLinesOfService/redfish/v1/StorageServices/{StorageServiceld}}/LinesOfService/IOConnectivityLinesOfService/redfish/v1/StorageServices/{StorageServiceld}}/LinesOfService/IOConnectivityLinesOfService/redfish/v1/StorageService//LinesOfService/IOConnectivityLinesOfService/redfish/v1/StorageService//LinesOfService/IOConnectivityLinesOfService//Line

**9.6.25.2 Properties** The properties defined for the LineOfServiceCollection schema are summarized in Table 117.

Table 117: LineOfServiceCollection properties

		Attribu	
Property	Type	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		The value of each member entry shall reference a LineOfService resource.
@odata.id	string	read-o nly	Link to a LineOfService resource. See the Links section and the <i>LineOfService</i> schema for details.
}]			

Property	Туре	Attribu tes	Notes
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.
Name	string	read-o nly	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

## 9.6.26 NVMeDomain 1.2.0

**9.6.26.1 Description** Properties for the Domain.

**9.6.26.2 URIs** /redfish/v1/NVMeDomains/{NVMeDomainId}

**9.6.26.3 Properties** The properties defined for the NVMeDomain 1.2.0 schema are summarized in Table 118.

 Table 118:
 NVMeDomain 1.2.0 properties

		Attribu	
Property	Туре	tes	Notes
Actions {}	object		This property shall contain the available actions for this resource.
ANAGroupId (v1.2+)	number	read-o nly (null)	This shall contain the ANA group id which applies to all namespaces within the domain. This corresponds to the value in the ANAGroupId field in volume.
AvailableFirmwareIma ges [ {	array		A collection of available firmware images.
@odata.id	string	read-o nly	Link to a  NVMeFirmwareImage resource. See the Links section and the   NVMeFirmwareImage schema for details.
}]			
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
DomainContents (v1.2+) {	object	* (null) *	This property shall contain the members of the domain.

	Attribu	
Туре	tes	Notes
array		Contains the current controllers that are part of this domain. These can be IO, Admin, or discovery controllers.
string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
array		Contains the current namespaces that are part of this domain. These can be IO, Admin, or discovery controllers.
string	read-o nly	Link to a Volume resource See the Links section and the <i>Volume</i> schema for details.
array		The members of the domain.
string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
	array string (URI) array array	Type tes  array  string (URI) read-o nly  array  read-o nly  array

		Attribu	
Property	Туре	tes	Notes
FirmwareImages (v1.2+) [ {	array		This property shall contain an array of pointers to available firmware images.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Links {	object		This property shall contain links to resources that are related to but are not contained by or subordinate to this resource.
AssociatedDomains [ {	array		This property shall contain an array of links to resources of type NVMeDomain that represent associated domains.
@odata.id	string	read-o nly	Link to another  NVMeDomain resource.
}]			NVMEDOMAINTESOUICE.
, ,			

		Attribu	
Property	Туре	tes	Notes
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
MaximumCapacityPerEn duranceGroupBytes	integer (By)	read-o nly (null)	This property shall contain the maximum capacity per endurance group in bytes of this NVMe Domain.
MaxNamespacesSupport edPerController (v1.2+)	number	read-o nly (null)	This property shall contain the maximum number of namespace attachments supported in this NVMe Domain. If there are no limits imposed, this property should not be implemented.
Name	string	read-o nly require d	This property shall contain the name of this resource or array member The value shall conform with the "Name" clause of the Redfish Specification.

		Attribu		
Property	Туре	tes	Notes	
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.	
Status {}	object		This property shall contain any status or health properties of the resource. For property details, see Status.	
TotalDomainCapacityB ytes	integer (By)	read-o nly (null)	This property shall contain the total capacity in bytes of this NVMe Domain.	
UnallocatedDomainCap acityBytes	integer (By)	read-o nly (null)	This property shall contain the total unallocated capacity in bytes of this NVMe Domain.	

# 9.6.27 NVMeDomainCollection

**9.6.27.1 URIs** /redfish/v1/NVMeDomains

**9.6.27.2 Properties** The properties defined for the NVMeDomainCollection schema are summarized in Table 119.

 Table 119:
 NVMeDomainCollection properties

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		The value of each member entry shall reference a NVMeDomain resource.
@odata.id	string	read-o nly	Link to a NVMeDomain resource. See the Links section and the <i>NVMeDomain</i> schema for details.
}]			
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.
Name	string	read-o nly	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

## 9.6.28 NVMeFirmwareImage 1.2.0 (deprecated)

This schema has been deprecated and use in new implementations is discouraged except to retain compatibility with existing products. This schema has been deprecated in favor of the SoftwareInventory schema.

- **9.6.28.1 Description** NVMe Domain firmware image information.
- **9.6.28.2 URIs** /redfish/v1/NVMeDomains/{DomainId}/AvailableFirmwareImages/{FirmwareImageId}
- **9.6.28.3 Properties** The properties defined for the NVMeFirmwareImage 1.2.0 (deprecated) schema are summarized in Table 120.

Table 120: NVMeFirmwareImage 1.2.0 (deprecated) properties

		Attribu	
Property	Туре	tes	Notes
Actions {}	object		This property shall contain the available actions for this resource.

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
FirmwareVersion	string	read-o nly (null)	This property shall contain the firmware version of the available NVMe firmware image.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
NVMeDeviceType	string (enum)	read-o nly (null)	This property shall specify the type of NVMe device for this NVMe firmware image. For the possible property values, see NVMeDeviceType in Property details.

		Attribu	
Property	Туре	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
Vendor	string	read-o nly (null)	This property shall include the name of the manufacturer or vendor associate with this NVMe firmware image.

# 9.6.28.4 Property details

**9.6.28.4.1 NVMeDeviceType** The defined property values are listed in Table 121. This property shall specify the type of NVMe device for this NVMe firmware image.

**Table 121:** NVMeDeviceType property values

string	Description
Drive	Specifies an device type of Drive, indicating a NVMe device that presents as an NVMe SSD device.
FabricAttachArray	Specifies an NVMe device type of FabricAttachArray, indicating a NVMe device that presents an NVMe front-end that abstracts the back end storage, typically with multiple options for availability and protection.

string	Description
JBOF	Specifies an device type of JBOF, indicating a NVMe device that presents as an NVMe smart enclosure for NVMe devices, typically NVMe Drives.

# 9.6.29 SpareResourceSet 1.0.2

**9.6.29.1 Description** The values define a set of spares of a particular type.

**9.6.29.2 Properties** The properties defined for the SpareResourceSet 1.0.2 schema are summarized in Table 122.

Table 122: SpareResourceSet 1.0.2 properties

		Attribu	
Property	Type	tes	Notes
<b>Actions</b> (v1.0.1+) {}	object		The Actions property shall contain the available actions for this resource.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
Links {	object		This structure shall contain references to resources that are not contained within this resource.
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
OnHandSpares [ {	array		The type of resources in the set.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
ReplacementSpareSets [{	array		Other spare sets that can be utilized to replenish this spare set.
@odata.id	string	read-o nly	Link to another SpareResourceSet resource.
}]			
}			

Tuno		
Туре	tes	Notes
string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
object		The location where this set of spares is kept. For property details, see Location v1.5.0).
boolean	read-w rite (null)	This set shall be available online.
string	read-w rite (null)	The type of resources in the set.
string (duratio n)	read-w rite(null)	Amount of time needed to make an on-hand resource available as a spare. Pattern:  ^P(\d+D)?(T(\d+H)? +M)?(\d+(.\d+)?S)?
	object  object  boolean  string  string	object  boolean read-w rite (null) string read-w rite (null) string read-w

		Attribu	
Property	Type	tes	Notes
TimeToReplenish	string (duratio n)	read-w rite(null)	Amount of time needed to replenish consumed on-hand resources.  Pattern:  ^P(\d+D)?(T(\d+H)?(\+M)?(\\d+(.\d+)?S)?)?

### 9.6.30 StorageGroup 1.6.0

**9.6.30.1 Description** The primary purposes of the collection shall be to govern access to the storage by clients or to add service requirements for the members of the collection. Access to the collected storage by a specified set of hosts shall be made available or unavailable atomically. Requirements specified by the class of service shall be satisfied by each collected element to which they apply. The storage group may contain: block, file, or object storage; local storage system access points through which the collection is made available; and hosts, or host access points to which the collection is made available.

9.6.30.2 URIs /redfish/v1/Storage/{StorageId}/StorageGroups/{StorageGroupId}
(deprecated) /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/StorageGroups/{StorageGroupId}
(deprecated) /redfish/v1/StorageServices/{StorageServiceId}/StorageGroups/{StorageGroupId}
(deprecated) /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/StorageGroups/{StorageGroupServiceId}}
(deprecated)

**9.6.30.3 Properties** The properties defined for the StorageGroup 1.6.0 schema are summarized in Table 123.

 Table 123:
 StorageGroup 1.6.0 properties

		Attribu	
Property	Туре	tes	Notes
AccessState	string (enum)	read-w rite(null)	The value of this property shall describe the access characteristics of this storage group. All associated logical units through all aggregated ports shall share this access state. For the possible property values, see Access State in Property details.
Actions {	object		The Actions property shall contain the available actions for this resource.
#StorageGroup.Expos eVolumes {}	object		Exposes the storage of this group via the target endpoints named in the ServerEndpointGroups to the initiator endpoints named in the ClientEndpointGroups. The property VolumesAreExposed shall be set to true when this action is completed. For more information, see the Actions section below.

		Attribu	
Property	Type	tes	Notes
#StorageGroup.HideV olumes {}	object		Hide the storage of this group from the initiator endpoints named in the ClientEndpointGroups. The property VolumesAreExposed shall be set to false when this action is completed. For more information, see the Actions section below.
}			
AuthenticationMethod (v1.2+)	string (enum)	read-w rite(null)	The value of this property must be what kind of authentication that the endpoints in this StorageGroup understands. For the possible property values, see AuthenticationMethod in Property details.

		Attribu	
Property	Туре	tes	Notes
ChapInfo (v1.2+) [ {	array		The value of this property must reflect the authentication used by this specific endpoint. If this endpoint represents an initiator, and AuthenticationMethod is CHAP or MutualCHAP, the Credentials fields CHAPUsername and CHAPSecret must be used. If this endpoint represents a target endpoint and AuthenticationMethod is MutualCHAP, then MutualCHAPUsername and MutualCHAPSecret must be used.
CHAPPassword (v1.3+)	string	read-w rite (null)	The value of this property shall be the password when CHAP authentication is specified.
CHAPUser (v1.3+)	string	read-w rite (null)	The value of this property shall be the username when CHAP authentication is specified.
InitiatorCHAPPasswor d (v1.2+)	string	read-w rite (null)	The value of this property shall be the shared secret for Mutual (2-way)CHAP authentication.

273

		Attribu		
Property	Туре	tes	Notes	
InitiatorCHAPUser (v1.2+)	string	read-w rite (null)	If present, this property is the initiator CHAP username for Mutual (2-way) authentication. For example, with an iSCSI scenario, use the initiator iQN.	
TargetCHAPPassword (v1.3+)	string	read-w rite (null)	The value of this property shall be the CHAP Secret for 2-way CHAP authentication.	
TargetCHAPUser (v1.2+)	string	read-w rite (null)	The value of this property shall be the Target CHAP Username for Mutual (2-way) CHAP authentication. For example, with an iSCSI scenario, use the target iQN.	
TargetPassword (v1.2+, deprecated v1.3)	string	read-w rite (null)	The value of this property shall be the CHAP Secret for 2-way CHAP authentication.  Deprecated in v1.3 and later. This property is deprecated in favor of TargetCHAPPassword.	

}]

		Attribu	
Property	Туре	tes	Notes
ClientEndpointGroups [	array		An array of references to groups of client-side endpoints that may be used to make requests to the storage exposed by this StorageGroup. If null the implementation may allow access to the storage via any client-side endpoint. If empty, the implementation shall not allow access to the storage via any client-side endpoint.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
DHChapInfo (v1.3+) [ {	array		The value of this property must reflect the authentication used by this specific endpoint when the authentication type is specificed as DHCHAP. If this endpoint represents an initiator, and AuthenticationMethod is DHCHAP, the Credentials fields LocalDHCHAPAuthSecret and PeerDHCHAPAuthSecret must be used.
LocalDHCHAPAuthSecre t (v1.3+)	string	read-w rite (null)	This property shall be the local DHCHAP auth secret for DHCHAP authentication.
<b>PeerDHCHAPAuthSecret</b> (v1.3+)	string	read-w rite (null)	The value of this property shall be the peer DHCHAP auth secret for DHCHAP authentication.
}]			
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.

		Attribu	
Property	Туре	tes	Notes
Identifier {}	object		The value shall be unique within the managed ecosystem. For property details, see Identifier v1.18.0).
Links {	object		This property shall contain links to other resources that are related to this resource.
ChildStorageGroups [ {	array		An array of references to StorageGroups are incorporated into this StorageGroup.
@odata.id	string	read-w rite	Link to another StorageGroup resource.
ClassOfService {	object		The ClassOfService that all storage in this StorageGroup conforms to. See the <i>ClassOfService</i> schema for details on this property.
@odata.id	string	read-w rite	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.

		Attribu	
Property	Туре	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
**ParentStorageGroups [ {	array		An array of references to StorageGroups that incorporate this StorageGroup.
@odata.id	string	read-o nly	Link to another StorageGroup resource.
<pre>}] }</pre>			
MappedVolumes (v1.1+) [	array		An array of mapped volumes managed by this storage group.
AccessCapability (v1.4+)	string (enum)	read-w rite(null)	Each entry shall specify the storage access capability for this mapped volume. For the possible property values, see Access Capability in Property details.
LogicalUnitNumber	string	read-w rite (null)	If present, the value is a SCSI Logical Unit Number for the Volume.

		Attribu	
Property	Туре	tes	Notes
Volume {	object		The value shall reference a mapped Volume. See the <i>Volume</i> schema for details on this property.
@odata.id	string	read-w rite	Link to a Volume resource See the Links section and the <i>Volume</i> schema for details.
} }]			
MembersAreConsistent	boolean	read-w rite (null)	The value of this property shall be set to true if all members are in a consistent state. The default value for this property is false.
Name	string	read-o nly require d	This property shall contain the name of this resource or array members. The value shall conform with the "Name" clause of the Redfish Specification.
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe direquirements. For property details, see Oem.

	Attribu	
Туре	tes	Notes
object		This property shall describe the replication relationship between this storage group and a corresponding source storage group. See the <i>StorageReplicaInfo</i> schema for details on this property.
string	read-o nly	Link to a ReplicaInfo resource. See the Links section and the StorageReplicaInfo schema for details.
array		The value shall reference the target replicas that are sourced by this replica.
string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
	object	Type tes  object  string read-o nly  array

		Attribu	
Property	Туре	tes	Notes
ServerEndpointGroups [ {	array		An array of references to groups of server-side endpoints that may be used to make requests to the storage exposed by this storage group. If null the implementation may allow access to the storage via any server-side endpoint. If empty, the implementation shall no allow access to the storage via any server-side endpoint.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
Status {}	object		The property shall contain the status of the StorageGroup. For property details, see Status.
Volumes [ {	array		An array of references to volumes managed by this storage group.
@odata.id	string	read-w rite	Link to a Volume resource See the Links section and the <i>Volume</i> schema for details.

		Attribu	
Property	Туре	tes	Notes
}]			
VolumesAreExposed	boolean	read-w rite (null)	The value of this property shall be set to true if storage volumes are exposed to the paths defined by the client and server endpoints. The default value for this property is false.

#### 9.6.30.4 Actions

## 9.6.30.4.1 ExposeVolumes Description

Exposes the storage of this group via the target endpoints named in the ServerEndpointGroups to the initiator endpoints named in the ClientEndpointGroups. The property VolumesAreExposed shall be set to true when this action is completed.

#### **Action URI**

{Base URI of target resource}/Actions/StorageGroup.ExposeVolumes

## **Action parameters**

This action takes no parameters.

## 9.6.30.4.2 HideVolumes Description

Hide the storage of this group from the initiator endpoints named in the ClientEndpointGroups. The property VolumesAreExposed shall be set to false when this action is completed.

#### **Action URI**

{Base URI of target resource}/Actions/StorageGroup.HideVolumes

## **Action parameters**

This action takes no parameters.

### 9.6.30.5 Property details

**9.6.30.5.1 AccessCapability** The defined property values are listed in Table 124. Each entry shall specify the storage access capability for this mapped volume.

Table 124: AccessCapability property values

string	Description
Read	Endpoints are allowed to perform reads from the specified resource.
ReadWrite	Endpoints are allowed to perform reads from and writes to the specified resource.

**9.6.30.5.2 AccessState** The defined property values are listed in Table 125. The value of this property shall describe the access characteristics of this storage group. All associated logical units through all aggregated ports shall share this access state.

**Table 125:** AccessState property values

string	Description
NonOptimized	This value shall indicate each endpoint is in an active and non-optimized state.
Optimized	This value shall indicate each endpoint is in an active and optimized state.
Standby	This value shall indicate each endpoint is in a standby state.
Transitioning	This value shall indicate each endpoint is transitioning to a new state.
Unavailable	This value shall indicate each endpoint is in an unavailable state.
	·

**9.6.30.5.3 AuthenticationMethod** The defined property values are listed in Table 126. The value of this property must be what kind of authentication that the endpoints in this StorageGroup understands.

Table 126: AuthenticationMethod property values

string	Description
СНАР	iSCSI Challenge Handshake Authentication Protocol (CHAP) authentication is used. For ChapInfo, the CHAPUser and CHAPPassword properties shall be used when type CHAP is selected.
DHCHAP	Diffie-Hellman Challenge Handshake Authentication Protocol (DHCHAP) is an authentication protocol used in Fibre Channel. When MutualCHAP is selected, DHChapInfo shall be used instead of CHAPInfo, and the LocalDHCHAPAuthSecret and PeerDHCHAPAuthSecret properties shall be used.
MutualCHAP	iSCSI Mutual Challenge Handshake Authentication Protocol (CHAP) authentication is used. For ChapInfo, the InitiatorCHAPUser, InitiatorCHAPPassword, TargetCHAPUser, and TargetCHAPPassword properties shall be used when type MutualCHAP is selected.
None	No authentication is used.

# 9.6.31 StorageGroupCollection

**9.6.31.1 URIs** /redfish/v1/Storage/{StorageId}/StorageGroups/redfish/v1/Storage/{StorageId}/Volumes/{Volumes/{Volumes/{Volumes/{StorageServices/{StorageServiceId}}/StorageGroups/redfish/v1/StorageServices/{StorageServiceId}/StorageGroups/redfish/v1/StorageServices/{StorageServiceId}/StorageGroups/redfish/v1/StorageGrou

**9.6.31.2 Properties** The properties defined for the StorageGroupCollection schema are summarized in Table 127.

 Table 127:
 StorageGroupCollection properties

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		The value of each member entry shall reference a StorageGroup resource.
@odata.id	string	read-o nly	Link to a StorageGroup resource. See the Links section and the <i>StorageGroup</i> schema for details.
}]			
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.
Name	string	read-o nly	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.

		Attribu	Attribu	
Property	Type	tes	Notes	
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.	

#### 9.6.32 StoragePool 1.9.1

**9.6.32.1 Description** A container of data storage capable of providing capacity conforming to one of its supported classes of service. The storage pool does not support IO to its data storage.

**9.6.32.2 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySources/ /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/redfish/v1/Storage/{StorageId}/StoragePools/ /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/Providin /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/AllocatedPools/{StoragePoolId} /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{S /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySources /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId} /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/AllocatedPools/{AllocatedPoolId} /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySou /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/AllocatedPools/{StoragePoolId} /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/Proceeds /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/ /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId} /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedPools /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySource /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}/AllocatedPools/{StorageId}/Volumes/

/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources/{Capac

**9.6.32.3 Properties** The properties defined for the StoragePool 1.9.1 schema are summarized in Table 128.

Table 128: StoragePool 1.9.1 properties

		Attribu	
Property	Туре	tes	Notes
Actions (v1.3+) {	object		The Actions property shall contain the available actions for this resource.
#StoragePool.AddDri ves {}	object		This action shall be used to add a drive, or set of drives, to an underlying capacity source for the storage pool. For more information, see the Actions section below.
#StoragePool.Remove Drives {}	object		This action shall be used to remove a drive from the StoragePool. This action is targeted at a graceful drive removal process, such as initiating a drive cleanup and data reallocation before drive removal from the pool. The implementation may impose restrictions on the number of drives removed simultaneously. For more information, see

		Attribu	
Property	Туре	tes	Notes
#StoragePool.SetCom pressionState {}	object		This action shall be used to set the compression state of the storage pool. This may be both a highly impactful, as well as a long running operation. For more information, see the Actions section below.
#StoragePool.SetDed uplicationState {}	object		This action shall be used to set the dedupe state of the storage pool. This may be both a highly impactful, as well as a long running operation.  For more information, see the Actions section below.
#StoragePool.SetEnc ryptionState {}	object		This action shall be used to set the encryption state of the storage pool. This may be both a highly impactful, as well as a long running operation. For more information, see the Actions section below.
} AllocatedPools {	object		The value of this property shall contain a reference to the collection of storage pools allocated from this storage pool.  Contains a link to a resource.

Duanant	T	Attribu	Mataa
Property	Туре	tes	Notes
@odata.id	string	read-o nly	Link to Collection of StoragePool. See the StoragePool schema for details.
}			
AllocatedVolumes {	object		The value of this property shall contain a reference to the collection of volumes allocated from this storage pool. Contains a link to a resource.
@odata.id }	string	read-o nly	Link to Collection of <i>Volume</i> . See the Volume schema for details.
BlockSizeBytes	integer (By)	read-o nly (null)	Maximum size in bytes of the blocks which form this Volume. If the block size is variable, then the maximum block size in bytes should be specified If the block size is unknown or if a block concept is not valid (for example, with Memory), enter a 1.

		Attribu	
Property	Туре	tes	Notes
Capacity {}	object		The value of this property shall provide an information about the actual utilization of the capacity within this storage pool. For property details, see Capacity v1.0.0).
CapacitySources [ {	array		Fully or partially consumed storage from a source resource. Each entry shall provide capacity allocation data from a named source resource.
@odata.id	string	read-w rite	Link to a CapacitySource resource. See the Links section and the <i>CapacitySource</i> schema for details.
ClassesOfService {	object		This property shall contain references to all classes of service supported by this storage pool. Capacity allocated from this storage pool shall conform to one of the referenced classes of service. Contains a link to a resource.

Dranarty	Tune	Attribu	Notes
Property	Туре	tes	Notes
@odata.id	string	read-w rite	Link to Collection of LineOfService. See the LineOfService schema for details.
}			
Compressed (v1.3+, deprecated v1.6)	boolean	read-w rite (null)	This property shall contain a boolean indicator if the StoragePool is currently utilizing compression or not. Deprecated in v1.6 and later. This property has been deprecated in favor of the IsCompressed and DefaultCompressionBeha vior properties.
CompressionEnabled (v1.6+)	boolean	read-w rite (null)	The property shall indicate whether or not compression is enabled on the storage pool.
<b>Deduplicated</b> (v1.3+, deprecated v1.6)	boolean	read-w rite (null)	This property shall contain a boolean indicator if the StoragePool is currently utilizing deduplication or not. Deprecated in v1.6 and later. This property has been deprecated in favor of the IsDeduplicated and DefaultDedupeBehavior properties.

Property	Туре	Attribu tes	Notes
<b>DeduplicationEnabled</b> (v1.6+)	boolean	read-w rite (null)	The property shall indicate whether or not deduplication is enabled on the storage pool.
DefaultClassOfServic e (v1.2+) {	object		If present, this property shall reference the default class of service for entities allocated from this storage pool. If the ClassesOfService collection is not empty, then the value of this property shall be one of its entries. If not present, the default class of service of the containing StorageService entity shall be used. See the ClassOfService schema for details on this property.
@odata.id	string	read-w rite	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.

		Attribu	
Property	Туре	tes	Notes
DefaultCompressionBe havior (v1.6+)	boolean	read-w rite (null)	If implemented, this property shall indicate the default dedupe behavior applied to the child resource (E.g., volume or storage pool) created out of the storage pool if the "Compressed" property is not set on the create request.
DefaultDeduplication Behavior (v1.6+)	boolean	read-w rite (null)	If implemented, this property shall indicate the default deduplication behavior applied to the child resource (E.g., volume or storage pool) created out of the storage pool if the "Deduplicated property is not set on the create request.
DefaultEncryptionBeh avior (v1.6+)	boolean	read-w rite (null)	If implemented, this property shall indicate the default dedupe behavior applied to the child resource (E.g., volume or storage pool) created out of the storage pool if the "Encrypted" property is not set on the create request.

		Attribu	
Property	Type	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Encrypted (v1.3+, deprecated v1.6)	boolean	read-w rite (null)	This property shall contain a boolean indicator if the StoragePool is currently utilizing encryption or not. Deprecated in v1.6 and later. This property has been deprecated in favor of the IsEncrypted and DefaultEncryptionBehavior properties.
EncryptionEnabled (v1.6+)	boolean	read-w rite (null)	The property shall indicate whether or not encryption is enabled on the storage pool.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Identifier {}	object		The value identifies this resource. The value shall be unique within the managed ecosystem. For property details, see Identifier v1.18.0).

		Attribu	
Property	Туре	tes	Notes
IOStatistics (v1.2+, deprecated v1.9) {}	object		The value shall represent IO statistics for this StoragePool. For property details, see IOStatistics. Deprecated in v1.9 and later. This property has been deprecated in favor of the IOStatistics property in Metrics.
Links {	object		The Links property, as described by the Redfish Specification, shall contain references to resources that are related to, but not contained by (subordinate to), this resource.
DedicatedSpareDrives (v1.2+) [ {	array		The value of this property shall be a reference to the resources that this StoragePool is associated with and shall reference resources of type Drive. This property shall only contain references to Drive entities which are currently assigned as a dedicated spare and are able to support this StoragePool.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
DefaultClassOfServic e {	object		If present, this property shall reference the default class of service for entities allocated from this storage pool. If the ClassesOfService collection is not empty, then the value of this property shall be one of its entries. If not present, the default class of service of the containing StorageService entity shall be used. See the ClassOfService schema for details on this property.
@odata.id	string	read-w rite	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.
}			

		Attribu	
Property	Туре	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
OwningStorageResourc e (v1.4+) {	object		This shall be a pointer to the Storage resource that owns or contains this StoragePool.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
<pre>} SpareResourceSets (v1.2+) [ {</pre>	array		Each referenced SpareResourceSet shall contain resources that may be utilized to replace the capacity provided by a failed resource having a compatible type.
@odata.id	string	read-w rite	Link to a SpareResourceSet resource. See the Links section and the SpareResourceSet schema for details.

		Attribu	
Property	Туре	tes	Notes
}]			
}			
LowSpaceWarningThres holdPercents []	array (%) (integer , null)	read-w rite	Each time the following value is less than one of the values in the array the LOW_SPACE_THRESHOLD _WARNING event shall be triggered: Across all CapacitySources entries, percent = (SUM(AllocatedBytes) - SUM(ConsumedBytes))/SU
MaxBlockSizeBytes (v1.1.1+)	integer (By)	read-o nly (null)	M(Allocated Bytes).  If present, the value is the maximum block size of an allocated resource. If the block size is unknown or if a block concept is not valid (for example, with Memory), this property shall be NULL.
<b>Metrics</b> (v1.9+) {	object	* (null) *	This property shall contain a link to a resource of type StoragePoolMetrics that specifies the metrics for this storage pool. IO metrics are reported in the IOStatistics property. See the StoragePoolMetrics schema for details on this property.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string	read-o nly	Link to a
			StoragePoolMetrics
			resource. See the Links
			section and the
			StoragePoolMetrics
			schema for details.
}			
Name	string	read-o nly	This property shall
		require d	contain the name of this
			resource or array member
			The value shall conform
			with the "Name" clause of
			the Redfish Specification.
NVMeEnduranceGroupPr	object	* (null)	This property shall
operties (v1.4+) {		*	contain properties to use
			when StoragePool is used
			to describe an NVMe
			Endurance Group.
EndGrpLifetime (v1.4+) {	object	* (null)	This property shall
		*	contain any Endurance
			Group Lifetime
			properties.

		Attribu	
Property	Туре	tes	Notes
DataUnitsRead (v1.4+)	integer	read-o nly (null)	The property shall contain the total number of data units read from this endurance group. This value does not include controller reads due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.
DataUnitsWritten (v1.4+)	integer	read-o nly (null)	The property shall contain the total number of data units written from this endurance group. This value does not include controller writes due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.

	_	Attribu	
Property	Туре	tes	Notes
EnduranceEstimate (v1.4+)	integer	read-o nly (null)	This property shall contain an estimate of the total number of data bytes that may be written to the Endurance Group over the lifetime of the Endurance Group assuming a write amplication of 1. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates endurance estimates are unsupported.
ErrorInformationLogE ntryCount (v1.4+)	integer	read-o nly (null)	This property shall contain the number of error information log entries over the life of the controller for the endurance group.
HostReadCommandCour (v1.4+)	<b>nt</b> integer	read-o nly (null)	This property shall contain the number of read commands completed by all controllers in the NVM subsystem for the Endurance Group. For the NVM command set, the is the number of compare commands and read commands.

Property	Туре	Attribu tes	Notes
HostWriteCommandCoun t (v1.4+)	integer	read-o nly (null)	This property shall contain the number of write commands completed by all controllers in the NVM subsystem for the Endurance Group. For the NVM command set, the is the number of compare commands and write commands.
MediaAndDataIntegrit yErrorCount (v1.4+)	integer	read-o nly (null)	This property shall contain the number of occurences where the controller detected an unrecovered data integrity error for the Endurance Group. Errors such as uncorrectable ECC, CRC checksum failure, or LBA tag mismatch are included in this field.

Proporty	Typo	Attribu tes	Notes
Property	Туре	les —	Notes
MediaUnitsWritten (v1.4+)	integer	read-o nly (null)	The property shall contain the total number of data units written from this endurance group. This value includes host and controller writes due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.

		Attribu	
Property	Туре	tes	Notes
PercentUsed (v1.4+)	integer	read-o nly (null)	This property shall contain a vendor-specific estimate of the percent life used for the endurance group based on the actual usage and the manufacturer prediction of NVM life. A value of 100 indicates that the estimated endurance of the NVM in the Endurance Group has been consumed, but may not indicate an NVM failure. According to the NVMe and JEDEC specs, the value is allowed to exceed 100. Percentages greater than 254 shall be represented as 255.
			This course sets of all
PredictedMediaLifeLe ftPercent (v1.4+)	number (%)	read-o nly (null)	This property shall contain an indicator of the percentage of life remaining in the drive's media.
NVMeProperties (v1.6+) {	object	* (null) *	The property shall indicate the type of storage pool.

Property	Type	Attribu tes	Notes
	Турс		Notes
NVMePoolType (v1.6+)	string (enum)	read-o nly (null)	This property shall indicate whether the StoragePool is used as an EnduranceGroup or an NVMSet. For the possible property values, see NVMePoolType in Property details.
}			
<b>NVMeSetProperties</b> (v1.4+) {	object	* (null) *	This property shall contain properties to use when StoragePool is used to describe an NVMe Set.
EnduranceGroupIdenti fier (v1.4+)	string	read-o nly (null)	This property shall contain a 16-bit hex value that contains the endurance group identifier. The endurance group identifier is unique within a subsystem.  Reserved values include 0  Pattern: ^0[xX](([a-fA-F] [0-9])*)\$
OptimalWriteSizeByte s (v1.4+)	integer (By)	read-o nly (null)	This property shall contain the Optimal Write Size in Bytes for this NVMe Set.

		Attribu	
Property	Туре	tes	Notes
Random4kReadTypicalN anoSeconds (v1.4+)	integer	read-o nly (null)	This property shall contain the typical time to complete a 4k read in 100 nano-second units when the NVM Set is in a Predictable Latency Mod Deterministic Window and there is 1 outstandin command per NVM Set.
SetIdentifier (v1.4+)	string	read-o nly (null)	This property shall contain a 16-bit hex value that contains the NVMe Set group identifier. The NVM Set identifier is unique within a subsystem. Reserved values include 0. Pattern ^0[xX](([a-fA-F] [0-9])*)\$
UnallocatedNVMNamesp aceCapacityBytes (v1.4+)	integer (By)	read-o nly (null)	This property shall contain the unallocated capacity of the NVMe Set in bytes.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe direquirements. For property details, see Oem.

		Attribu	
Property	Туре	tes	Notes
PoolType (v1.6+, deprecated v1.7) []	array (string (enum))	read-o nly (null)	The property shall indicate the type of storage pool. For the possible property values, see PoolType in Property details. Deprecated in v1.7 and later. This property has been deprecated in favor of the SupportedPoolTypes property.
RecoverableCapacityS ourceCount (v1.2+)	integer	read-w rite (null)	The value is the number of available capacity source resources currently available in the event that an equivalent capacity source resource fails.
RemainingCapacityPer cent (v1.1+)	integer	read-o nly (null)	If present, this value shall return {[(SUM(AllocatedBytes) - SUM(ConsumedBytes)]/S UM(AllocatedBytes)}*1 00 represented as an integer value.
ReplicationEnabled (v1.8+)	boolean	read-w rite (null)	The property shall indicate whether or not replication is enabled on the storage pool. If enabled for pool, replication can still be disabled on individual resources (e.g., volumes) within the pool.

		Attribu	
Property	Туре	tes	Notes
Status {}	object		The property shall contain the status of the StoragePool. For property details, see Status.
SupportedPoolTypes	array	read-o nly	This collection shall
(v1.7+) []	(string (enum))	(null)	contain all the PoolType values supported by the storage pool. For the possible property values, see SupportedPoolTypes in Property details.
SupportedProvisionin	array	read-w	This collection shall
<b>gPolicies</b> (v1.3+) []	(string (enum))	rite(null)	specify all supported storage allocation policies for the Storage Pool. For the possible property values, see SupportedProvisioningP olicies in Property details.
SupportedRAIDTypes	array	read-o nly	This collection shall
(v1.3+) []	(string (enum))	(null)	contain all the RAIDType values supported by the storage pool. For the possible property values, see SupportedRAIDTypes in Property details.

## 9.6.32.4 Actions

# 9.6.32.4.1 AddDrives Description

This action shall be used to add a drive, or set of drives, to an underlying capacity source for the storage pool.

## **Action URI**

{Base URI of target resource}/Actions/StoragePool.AddDrives

## **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 129.

Table 129: AddDrives action parameters

Parameter Name	Туре	Attributes	Notes
CapacitySource {	object	optional	This parameter shall contain the target capacity source for the drive(s). This property does not need to be specified if the storage pool only contains one capacity source, or if the implementation is capable of automatically selecting the appropriate capacity source. See the CapacitySource schema for details on this property.

Parameter Name	Туре	Attributes	Notes
@odata.id	string	read-only	Link to a CapacitySource resource. See the Links section and the CapacitySourc e schema for details.
Drives [ {	array	required	This parameter shall contain the Uri to the existing drive or drives to be added to a capacity source of the storage pool. The implementation may impose restrictions on the number of drives added simultaneously.
@odata.id	string (URI)	read-only	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
			•

#### 9.6.32.4.2 RemoveDrives Description

This action shall be used to remove a drive from the StoragePool. This action is targeted at a graceful drive removal process, such as initiating a drive cleanup and data reallocation before drive removal from the pool. The implementation may impose restrictions on the number of drives removed simultaneously.

#### **Action URI**

{Base URI of target resource}/Actions/StoragePool.RemoveDrives

## **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 130.

**Table 130:** RemoveDrives action parameters

Parameter Name	Туре	Attributes	Notes
Drives [ {	array	required	This parameter shall contain the Uri to the drive o drives to be removed from the underlying capacity source.
@odata.id	string (URI)	read-only	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			

#### 9.6.32.4.3 SetCompressionState Description

This action shall be used to set the compression state of the storage pool. This may

be both a highly impactful, as well as a long running operation.

#### **Action URI**

{Base URI of target resource}/Actions/StoragePool.SetCompressionState

#### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 131.

**Table 131:** SetCompressionState action parameters

Parameter Name	Type	Attributes	Notes
Enable	boolean	required	This property shall indicate the desired compression state of the storage pool.

## 9.6.32.4.4 SetDeduplicationState Description

This action shall be used to set the dedupe state of the storage pool. This may be both a highly impactful, as well as a long running operation.

#### **Action URI**

{Base URI of target resource}/Actions/StoragePool.SetDeduplicationState

## **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 132.

Table 132: SetDeduplicationState action parameters

Parameter Name	Туре	Attributes	Notes
Enable	boolean	required	This property shall indicate the desired deduplication state of the storage pool.

## 9.6.32.4.5 SetEncryptionState Description

This action shall be used to set the encryption state of the storage pool. This may be both a highly impactful, as well as a long running operation.

#### **Action URI**

{Base URI of target resource}/Actions/StoragePool.SetEncryptionState

#### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 133.

**Table 133:** SetEncryptionState action parameters

Parameter Name	Type	Attributes	Notes
Enable	boolean	required	This property shall indicate the desired encryption state of the storage pool.

## 9.6.32.5 Property details

**9.6.32.5.1 NVMePoolType** The defined property values are listed in Table 134. This property shall indicate whether the StoragePool is used as an EnduranceGroup

or an NVMSet.

**Table 134:** NVMePoolType property values

string	Description
EnduranceGroup	This type shall be used to specify a pool of type EnduranceGroup, used by NVMe devices.
NVMSet	This type shall be used to specify a pool of type NVMSet, used by NVMe devices.

**9.6.32.5.2 PoolType** The defined property values are listed in Table 135. The property shall indicate the type of storage pool.

**Table 135:** PoolType property values

string	Description		
	Безеприон		
Block	This type shall be used to specify a pool of type block. This is used when the pool serves block		
	storage.		
File	This type shall be used to specify a pool of type file. This setting is used when the pool serves file storage.		
Object	This type shall be used to specify a pool of type object.		
Pool	This type shall be used to specify a pool of type pool. This setting is used to indicate a "pool of pools" hierarchy.		

**9.6.32.5.3 SupportedPoolTypes** The defined property values are listed in Table 136. This collection shall contain all the PoolType values supported by the storage pool.

**Table 136:** SupportedPoolTypes property values

string	Description
Block	This type shall be used to specify a pool of type block. This is used when the pool serves block storage.
File	This type shall be used to specify a pool of type file. This setting is used when the pool serves file storage.
Object	This type shall be used to specify a pool of type object.
Pool	This type shall be used to specify a pool of type pool. This setting is used to indicate a "pool of pools" hierarchy.

**9.6.32.5.4 SupportedProvisioningPolicies** The defined property values are listed in Table 137. This collection shall specify all supported storage allocation policies for the Storage Pool.

**Table 137:** SupportedProvisioningPolicies property values

string	Description
Fixed	This enumeration literal specifies storage shall be fully allocated.
Thin	This enumeration literal specifies storage may be over allocated.

**9.6.32.5.5 SupportedRAIDTypes** The defined property values are listed in Table 138. This collection shall contain all the RAIDType values supported by the storage pool.

 Table 138:
 Supported RAID Types property values

string	Description		
None	A placement policy with no redundancy at the device level.		
RAID0	A placement policy where consecutive logical blocks of data are uniformly distributed across a set of independent storage devices without offering any form of redundancy. This is commonly referred to as data striping. This form of RAID will encounter data loss with the failure of any storage device in the set.		
RAID00	A placement policy that creates a RAID 0 stripe set over two or more RAID 0 sets. This is commonly referred to as RAID 0+0. This form of data layout is not fault tolerant; if any storage device fails there will be data loss.		
RAID01	A data placement policy that creates a mirrored device (RAID 1) over a set of striped devices (RAID 0). This is commonly referred to as RAID 0+1 or RAID 0/1. Data stored using this form of RAID is able to survive a single RAID 0 data set failure without data loss.		
RAID1	A placement policy where each logical block of data is stored on more than one independent storage device. This is commonly referred to as mirroring. Data stored using this form of RAID is able to survive a single storage device failure without data loss.		
RAID10	A placement policy that creates a striped device (RAID 0) over a set of mirrored devices (RAID 1). This is commonly referred to as RAID 1/0. Data stored using this form of RAID is able to survive storage device failures in each RAID set without data loss.		

string	Description
RAID10E	A placement policy that uses a RAID 0 stripe set over two or more RAID 10 sets. This is commonly referred to as Enhanced RAID 10.  Data stored using this form of RAID is able to survive a single device failure within each nested RAID 1 set without data loss.
RAID10Triple	A placement policy that uses a striped device (RAID 0) over a set of triple mirrored devices (RAID 1Triple). This form of RAID can survive up to two failures in each triple mirror set without data loss.
RAID1E	A placement policy that uses a form of mirroring implemented over a set of independent storage devices where logical blocks are duplicated on a pair of independent storage devices so that data is uniformly distributed across the storage devices. This is commonly referred to as RAID 1 Enhanced. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID1Triple	A placement policy where each logical block of data is mirrored three times across a set of three independent storage devices. This is commonly referred to as three-way mirroring. This form of RAID can survive two device failures without data loss.

string	Description
RAID3	A placement policy using parity-based protection where logical bytes of data are uniformly distributed across a set of independent storage devices and where the parity is stored on a dedicated independent storage device. Data stored using this form of RAID is able to survive a single storage device failure without data loss. If the storage devices use rotating media, they are assumed to be rotationally synchronized, and the data stripe size should be no larger than the exported block size.
RAID4	A placement policy using parity-based protection where logical blocks of data are uniformly distributed across a set of independent storage devices and where the parity is stored on a dedicated independent storage device. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID5	A placement policy using parity-based protection for storing stripes of "n" logical blocks of data and one logical block of parity across a set of "n+1" independent storage devices where the parity and data blocks are interleaved across the storage devices. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID50	A placement policy that uses a RAID 0 stripe set over two or more RAID 5 sets of independent storage devices. Data stored using this form of RAID is able to survive a single storage device failure within each RAID 5 set without data loss.

string	Description		
RAID6	A placement policy using parity-based protection for storing stripes of "n" logical blocks of data and two logical blocks of independent parity across a set of "n+2" independent storage devices where the parity and data blocks are interleaved across the storage devices. Data stored using this form of RAID is able to survive any two independent storage device failures without data loss.		
RAID60	A placement policy that uses a RAID 0 stripe set over two or more RAID 6 sets of independent storage devices. Data stored using this form of RAID is able to survive two device failures within each RAID 6 set without data loss.		
RAID6TP	A placement policy that uses parity-based protection for storing stripes of "n" logical blocks of data and three logical blocks of independent parity across a set of "n+3" independent storage devices where the parity and data blocks are interleaved across the storage devices. This is commonly referred to as Triple Parity RAID. Data stored using this form of RAID is able to survive any three independent storage device failures without data loss.		

## 9.6.33 StoragePoolCollection

**9.6.33.1 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySources/{CapacitySources/{StoragePools/redfish/v1/Storage}} /redfish/v1/Storage/{StorageId}/StoragePools/redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/Providin/redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/AllocatedPools/redfish/v1/Storage/{StorageId}/Volume/redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/redfish/v1/StorageServices/{StorageServiceId}/StoragePools/redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySources/{CapacitySources/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources/{Ca

/redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/AllocatedPools
/redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/Pre/
/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{
/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedPools
/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySource/
/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}/AllocatedPools
/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySou

# **9.6.33.2 Properties** The properties defined for the StoragePoolCollection schema are summarized in Table 139.

Table 139: StoragePoolCollection properties

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		The value of each member entry shall reference a StoragePool resource.
@odata.id	string	read-o nly	Link to a StoragePool resource. See the Links section and the <i>StoragePool</i> schema for details.
} ]			

Property	Type	Attribu tes	Notes
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.
Name	string	read-o nly	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

#### 9.6.34 StoragePoolMetrics 1.0.1

**9.6.34.1 Description** The StoragePoolMetrics schema shall contain the usage and health statistics for a storage pool in a Redfish implementation.

**9.6.34.2 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySources/redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedPools/{AllocatedPoolId}/Metrics/redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/Providin/redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/Metrics/redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/AllocatedPools/{StoragePoolId}/Metrics/redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/ProvidingPools/{StorageId}/Provid

/redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySources/redfish/v1/StorageServices/{StorageServiceId}}/StoragePools/{StoragePoolId}/AllocatedPools/{AllocatedPools/redfish/v1/StorageServices/{StorageServiceId}}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySources/{CapacitySources/{StorageServiceId}}/StoragePools/{StoragePoolId}}/Metrics/redfish/v1/StorageServices/{StorageServiceId}}/Volumes/{VolumeId}/AllocatedPools/{StoragePoolId}}/Profish/v1/StorageServices/{StorageServiceId}}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}}/Profish/v1/Systems/{ComputerSystemId}}/Storage/{StorageId}/FileSystems/{FileSystemId}}/CapacitySources/{redfish/v1/Systems/{ComputerSystemId}}/Storage/{StorageId}}/StoragePools/{StoragePoolId}}/AllocatedPools/redfish/v1/Systems/{ComputerSystemId}}/Storage/{StorageId}}/StoragePools/{StoragePoolId}}/Metrics/redfish/v1/Systems/{ComputerSystemId}}/Storage/{StorageId}}/StoragePools/{StoragePoolId}}/Metrics/redfish/v1/Systems/{ComputerSystemId}}/Storage/{StorageId}}/Volumes/{VolumeId}/AllocatedPools/{StorageId}}/redfish/v1/Systems/{ComputerSystemId}}/Storage/{StorageId}}/Volumes/{VolumeId}/AllocatedPools/{StorageId}}/redfish/v1/Systems/{ComputerSystemId}}/Storage/{StorageId}}/Volumes/{VolumeId}/CapacitySources/{Ca

**9.6.34.3 Properties** The properties defined for the StoragePoolMetrics 1.0.1 schema are summarized in Table 140.

Table 140: StoragePoolMetrics 1.0.1 properties

		Attribu	
Б	<del>-</del>	7 1001 100	N
Property	Туре	tes	Notes
Actions {}	object		This property shall contain the available actions for this resource.
ConsistencyCheckErro rCount	number	read-o nly (null)	This property shall contain the number of consistency check errors over the lifetime of the storage pool.
CorrectableIOReadErr orCount	integer	read-o nly (null)	This property shall contain the number of the correctable read errors for the lifetime of the storage pool.
CorrectableIOWriteEr rorCount	integer	read-o nly (null)	This property shall contain the number of the correctable write errors for the lifetime of the storage pool.

		Attribu		
Property	Туре	tes	Notes	
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.	
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.	
IOStatistics {}	object		The value shall represent IO statistics for this storage pool. For property details, see IOStatistics.	
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.	
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.	

Property		Attribu	
	Туре	tes	Notes
RebuildErrorCount	number	read-o nly (null)	This property shall contain the number of rebuild errors over the lifetime of the storage pool.
StateChangeCount	number	read-o nly (null)	This property shall contain the number of state changes (changes in Status.State) for this storage pool.
UncorrectableIOReadE rrorCount	integer	read-o nly (null)	This property shall contain the number of the uncorrectable read errors for the lifetime of the storage pool.
UncorrectableIOWrite ErrorCount	integer	read-o nly (null)	This property shall contain the number of the uncorrectable write errors for the lifetime of the storage pool.

# 9.6.35 StorageReplicaInfo 1.4.0

**9.6.35.1 Description** This entity shall define the characteristics of a replica.

**9.6.35.2 Properties** The properties defined for the StorageReplicaInfo 1.4.0 schema are summarized in Table 141.

 Table 141:
 StorageReplicaInfo 1.4.0 properties

		Attribu	
Property	Туре	tes	Notes
<b>Actions</b> (v1.2+) {}	object		The Actions property shal contain the available actions for this resource.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
ld	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Name	string	read-o nly require d	This property shall contain the name of this resource or array member The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

# 9.6.36 StorageService 1.7.0

**9.6.36.1 Description** Collection of resources that the system can make available to one or more host systems. The collection can contain: block, file, or object storage; local system access points through which the collection is made available; hosts, or host access points to which the collection is made available.

**9.6.36.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/redfish/v1/Systems/{ComputerSystemId}/St

**9.6.36.3 Properties** The properties defined for the StorageService 1.7.0 schema are summarized in Table 142.

Table 142: StorageService 1.7.0 properties

		Attribu	
Property	Туре	tes	Notes
Actions {	object		The Actions property shall contain the available actions for this resource.
#StorageService.Set EncryptionKey {}	object		This defines the name of the custom action supported on this resource. For more information, see the Actions section below.
}			
ClassesOfService {	object		The value of each entry in the array shall reference a ClassOfService supported by this service. Contains a link to a resource.
@odata.id	string	read-w rite	Link to Collection of LineOfService. See the LineOfService schema for details.
}			

		Attribu	
Property	Туре	tes	Notes
ClientEndpointGroups {}	object		The value of each entry in the array shall reference an EndpointGroup.
<b>Connections</b> (v1.6+) {}	object		The value of this property shall contain references to all Connections that include this volume.
ConsistencyGroups (v1.3+) {	object		The value of each entry in the array shall reference a Consistency Group.  Contains a link to a resource.
@odata.id }	string	read-w rite	Link to Collection of ConsistencyGroup. See the ConsistencyGroup schema for details.
DataProtectionLoSCap abilities (v1.2+) {	object		The value shall reference the data protection capabilities of this service See the DataProtectionLoSCapa bilities schema for details on this property.
@odata.id	string	read-w rite	Link to a  DataProtectionLoSCapab ilities resource. See the Links section and the DataProtectionLoSCapa bilities schema for details

		Attribu	
Property	Туре	tes	Notes
DataSecurityLoSCapab ilities (v1.2+) {	object		The value shall reference the data security capabilities of this service See the DataSecurityLoSCapabilities schema for details on this property.
@odata.id	string	read-w rite	Link to a DataSecurityLoSCapabil ities resource. See the Links section and the DataSecurityLoSCapabi lities schema for details.
DataStorageLoSCapabi lities (v1.2+) {	object		The value shall reference the data storage capabilities of this service See the DataStorageLoSCapabil ities schema for details on this property.
@odata.id	string	read-w rite	Link to a DataStorageLoSCapabili ties resource. See the Links section and the DataStorageLoSCapabil ities schema for details.

	Attribu		
Property	Туре	tes	Notes
DefaultClassOfServic e (v1.2+) {	object		If present, this property shall reference the default class of service for entities allocated by this storage service. This default may be overridden by the DefaultClassOfService property values within contained StoragePools. See the ClassOfService schema for details on this property.
@odata.id	string	read-w rite	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema fo details.
} Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Drives {}	object		A collection that indicates all the drives managed by this storage service.
EndpointGroups {}	object		The value of each entry in the array shall reference an EndpointGroup.

		Attribu	
Property	Туре	tes	Notes
Endpoints {}	object		The value of each entry in the array shall reference an Endpoint managed by this service.
FileSystems {	object		An array of references to FileSystems managed by this storage service. Contains a link to a resource.
@odata.id	string	read-w rite	Link to Collection of FileSystem. See the FileSystem schema for details.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Identifier {}	object		The value identifies this resource. The value shall be unique within the managed ecosystem. For property details, see Identifier v1.18.0).
IOConnectivityLoSCap abilities (v1.2+) {	object		The value shall reference the IO connectivity capabilities of this service See the IOConnectivityLoSCapa bilities schema for details on this property.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string	read-w rite	Link to a IOConnectivityLoSCapab ilities resource. See the Links section and the IOConnectivityLoSCapa bilities schema for details
IOPerformanceLoSCapa bilities (v1.2+) {	object		The value shall reference the IO performance capabilities of this service See the IOPerformanceLoSCapabilities schema for details on this property.
@odata.id	string	read-w rite	Link to a IOPerformanceLoSCapab lities resource. See the Links section and the IOPerformanceLoSCapab ilities schema for details.
IOStatistics (v1.2+, deprecated v1.7) {}	object		The value shall represent IO statistics for this StorageService. For property details, see IOStatistics. Deprecated in v1.7 and later. This property is deprecated in favor of the IOStatistics property in StorageServiceMetrics.

		Attribu	
Property	Туре	tes	Notes
LinesOfService (v1.4+) [ {	array		The value of each entry shall reference a LineOfService collection defined for this service.
<b>@odata.id</b>	string	read-w rite	Link to Collection of LineOfService. See the LineOfService schema for details.
	a la : a a t		This property chall
Links {	object		This property shall contain links to other resources that are relate to this resource.
DataProtectionLoSCap abilities {	object		The value shall reference the data protection capabilities of this service See the DataProtectionLoSCapa bilities schema for detail on this property.
@odata.id	string	read-w rite	Link to a  DataProtectionLoSCapa ilities resource. See the Links section and the DataProtectionLoSCapa bilities schema for detai
DataSecurityLoSCapab ilities {	object		The value shall reference the data security capabilities of this service. See the DataSecurityLoSCapabilities schema for details on this property.

		Attribu	
Property	Type	tes	Notes
@odata.id	string	read-w rite	Link to a DataSecurityLoSCapabil ities resource. See the Links section and the DataSecurityLoSCapabi lities schema for details.
} DataStorageLoSCapabi lities {	object		The value shall reference the data storage capabilities of this service. See the DataStorageLoSCapabilities schema for details of this property.
@odata.id	string	read-w rite	Link to a  DataStorageLoSCapabili ties resource. See the Links section and the DataStorageLoSCapabil ities schema for details.
} DefaultClassOfServic e {	object		If present, this property shall reference the default class of service for entities allocated by this storage service. This default may be overridden by the DefaultClassOfService property values within contained StoragePools. See the ClassOfService schema for details on this property.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string	read-w rite	Link to a ClassOfService resource. See the Links section and the ClassOfService schema for details.
}			
HostingSystem {}	object		The value shall reference the ComputerSystem or StorageController that hosts this service.
IOConnectivityLoSCap abilities {	object		The value shall reference the IO connectivity capabilities of this service. See the IOConnectivityLoSCapa bilities schema for details on this property.
@odata.id	string	read-w rite	Link to a IOConnectivityLoSCapab ilities resource. See the Links section and the IOConnectivityLoSCapa bilities schema for details
IOPerformanceLoSCapa bilities {	object		The value shall reference the IO performance capabilities of this service. See the IOPerformanceLoSCapabilities schema for details on this property.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string	read-w rite	Link to a IOPerformanceLoSCapab lities resource. See the Links section and the IOPerformanceLoSCapab ilities schema for details.
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
} Metrics (v1.7+) {	object	* (null) *	This property shall contain a link to a resource of type StorageServiceMetrics that specifies the metrics for this storage service. IC metrics are reported in the IOStatistics property. See the StorageServiceMetrics schema for details on this property.

Type	toc	
	tes	Notes
string	read-o nly	Link to a StorageServiceMetrics resource. See the Links section and the StorageServiceMetrics schema for details.
string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
array		This collection shall contain the redundancy information for the storage subsystem.
string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
	string	string read-o nly require d  object

		Attribu	
Property	Туре	tes	Notes
ServerEndpointGroups {}	object		The value of each entry in the array shall reference a EndpointGroup.
SpareResourceSets (v1.2+) [ {	array		Each contained SpareResourceSet shall contain resources that may be utilized to replace the capacity provided by a failed resource having a compatible type.
@odata.id	string	read-w rite	Link to a SpareResourceSet resource. See the Links section and the SpareResourceSet schema for details.
}]			
Status {}	object		The property shall contain the status of the StorageService. For property details, see Status.
StorageGroups (deprecated v1.6) {	object		The value of each entry in the array shall reference a StorageGroup. Contains a link to a resource.  Deprecated in v1.6 and later. This property is deprecated in favor of the Connections property.
@odata.id	string	read-o nly	Link to Collection of StorageGroup. See the StorageGroup schema for details.

		Attribu	
Property	Туре	tes	Notes
}			
StoragePools {	object		An array of references to StoragePools. Contains a link to a resource.
@odata.id	string	read-o nly	Link to Collection of StoragePool. See the StoragePool schema for details.
StorageSubsystems	array		The value shall be a link
(v1.0.1+) [ {	array		to a collection of type StorageCollection having members that represent storage subsystems managed by this storage service.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
Volumes {	object		An array of references to Volumes managed by this storage service. Contains a link to a resource.
@odata.id	string	read-w rite	Link to Collection of <i>Volume</i> . See the Volume schema for details.
}			

# 9.6.36.4 Actions

# 9.6.36.4.1 SetEncryptionKey Description

This defines the name of the custom action supported on this resource.

#### **Action URI**

{Base URI of target resource}/Actions/StorageService.SetEncryptionKey

### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 143.

Table 143: SetEncryptionKey action parameters

Parameter Name	Туре	Attributes	Notes
EncryptionKey	string	optional	This defines the property name for the action.

# 9.6.36.5 Property details

#### 9.6.36.5.1 idRef

```
** st ri rea The value of this property shall be the unique identifier @o ng d-on for the resource and it shall be of the form defined in the da ta (U RI ly Redfish specification.
.i d )
```

# 9.6.37 StorageServiceCollection

**9.6.37.1 URIs** /redfish/v1/StorageServices/redfish/v1/Systems/{ComputerSystemId}/StorageServices

**9.6.37.2 Properties** The properties defined for the StorageServiceCollection schema are summarized in Table 145.

**Table 145:** StorageServiceCollection properties

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		The value of each member entry shall reference a StorageService resource.
@odata.id	string	read-o nly	Link to a StorageService resource. See the Links section and the StorageService schema for details.
}]			
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.
Name	string	read-o nly	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.

		Attribu	
Property	Type	tes	Notes
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d
			requirements. For property details, see Oem.

# 9.6.38 StorageServiceMetrics 1.0.1

**9.6.38.1 Description** The StorageServiceMetrics schema shall contain the usage and health statistics for a storage service in a Redfish implementation.

**9.6.38.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/Metrics /redfish/v1/Systems/{ComputerSystemId}/StorageServices/{StorageServiceId}/Metrics

**9.6.38.3 Properties** The properties defined for the StorageServiceMetrics 1.0.1 schema are summarized in Table 146.

**Table 146:** StorageServiceMetrics 1.0.1 properties

		Attribu	
Property	Туре	tes	Notes
Actions {}	object		This property shall contain the available actions for this resource.

		Attribu	
Property	Type	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
ld	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
IOStatistics {}	object		The value shall represent IO statistics for this storage service. For property details, see IOStatistics.
Name	string	read-o nly require d	This property shall contain the name of this resource or array membe The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

# 9.6.39 StorageSystemCollection

**9.6.39.1 URIs** /redfish/v1/StorageSystems

**9.6.39.2 Properties** The properties defined for the StorageSystemCollection schema are summarized in Table 147.

Table 147: StorageSystemCollection properties

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		The value of each member entry shall reference a ComputerSystem resource that shall have a HostingRoles entry with a value of "StorageServer".
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.

Property	Туре	Attribu tes	Notes
Name	string	read-o nly	This property shall contain the name of this resource or array members. The value shall conform with the "Name" clause of the Redfish Specification.
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

#### 9.6.40 Volume 1.10.1

**9.6.40.1 Description** This resource shall be used to represent a volume, virtual disk, logical disk, LUN, or other logical storage for a Redfish implementation.

9.6.40.2 URIs /redfish/v1/CompositionService/ResourceBlocks/{ResourceBlocks/{ResourceBlockId}}/Storage/{StorageId}}/Volumes/Indicated Provided Provided

/redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySou

/redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/redfish/v1/StorageServices/{StorageServiceId}/VolumeId}/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId}/VolumeId}/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedVolum/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySource/redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}

# **9.6.40.3 Properties** The properties defined for the Volume 1.10.1 schema are summarized in Table 148.

Table 148: Volume 1.10.1 properties

		 Attribu	
Property	Туре	tes	Notes
AccessCapabilities (v1.1+)	array (string (enum))	read-w rite(null)	Each entry shall specify a current storage access capability. For the possible property values, see AccessCapabilities in Property details.
Actions {	object		The Actions property shall contain the available actions for this resource.
#Volume.AssignRepli caTarget (v1.4+) {}	object		This action shall be used to establish a replication relationship by assigning an existing volume to serve as a target replica for an existing source volume. For more information, see the Actions section below.

		Attribu	
Property	Туре	tes	Notes
#Volume.ChangeRAIDL ayout (v1.5+) {}	object		This action shall request the system to change the RAID layout of the volume. Depending on the combination of the submitted parameters, this could be changing the RAID type, changing the span count, changing the number of drives used by the volume, or another configuration change supported by the system. Note that usage of this action while online may potentially cause data loss if the available capacity is reduced. For more information, see the Actions section below.
#Volume.CheckConsis tency {}	object		This defines the name of the custom action supported on this resource. For more information, see the Actions section below.
#Volume.CreateRepli caTarget (v1.4+) {}	object		This action shall be used to create a new volume resource to provide expanded data protection through a replica relationship with the specified source volume For more information, set the Actions section below

		Attribu	
Property	Туре	tes	Notes
#Volume.ForceEnable (v1.5+) {}	object		This action shall request the system to force the volume to enabled state regardless of data loss scenarios. For more information, see the Actions section below.
**#Volume.Initialize (v1.5+) {}	object		This defines the name of the custom action supported on this resource. If InitializeMethod is not specified in the request body, but the property InitializeMethod is specified, the property InitializeMethod value should be used. If neither is specified, the InitializeMethod should be Foreground. For more information, see the Actions section below.
#Volume.RemoveRepli caRelationship (v1.4+) {}	object		This action shall be used to disable data synchronization betwee a source and target volume, remove the replication relationship, and optionally delete th target volume. For more information, see the Actions section below.

		Attribu	
Property	Туре	tes	Notes
#Volume.ResumeRepli cation (v1.4+) {}	object		This action shall be used to resume the active data synchronization between a source and target volume, without otherwise altering the replication relationship. For more information, see the Actions section below.
#Volume.ReverseRepl icationRelationship (v1.4+) {}	object		This action shall be used to reverse the replication relationship between a source and target volume For more information, see the Actions section below.
#Volume.SplitReplic ation (v1.4+) {}	object		This action shall be used to split the replication relationship and suspend data synchronization between a source and target volume. For more information, see the Actions section below.
#Volume.SuspendRepl ication (v1.4+) {}	object		This action shall be used to suspend active data synchronization between a source and target volume, without otherwise altering the replication relationship. For more information, see the Actions section below.
}			

		Attribu	
Property	Туре	tes	Notes
AllocatedPools (v1.1+) {	object		The value of this property shall contain references to all storage pools allocated from this volume. Contains a link to a resource.
@odata.id	string	read-o nly	Link to Collection of StoragePool. See the StoragePool schema for details.
} <b>ALUA</b> (v1.10+) {	object	* (null) *	This shall identify the ALUA properties for this volume.
<b>ANAGroupId</b> ( <i>v1.10+</i> ) }	number	read-o nly (null)	This shall contain the ANA group id for this volume.
BlockSizeBytes	integer (By)	read-o nly (null)	This property shall contain size of the smallest addressable unit of the associated volume.
Capacity (v1.1+) {}	object		Information about the utilization of capacity allocated to this storage volume. For property details, see Capacity v1.0.0).
CapacityBytes	integer (By)	read-w rite(null)	This property shall contain the size in bytes of the associated volume.

		Attribu	
Property	Туре	tes	Notes
CapacitySources (v1.1+) [ {	array		Fully or partially consumed storage from a source resource. Each entry provides capacity allocation information from a named source resource.
@odata.id	string	read-w rite	Link to a CapacitySource resource. See the Links section and the <i>CapacitySource</i> schema for details.
Compressed (v1.4+)	boolean	read-w rite (null)	This property shall contain a boolean indicator if the Volume is currently utilizing compression or not.
<b>Connections</b> (v1.9+) [ {	array		The value of this property shall contain references to all Connections that include this volume.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
<b>Deduplicated</b> (v1.4+)	boolean	read-w rite (null)	This property shall contain a boolean indicator if the Volume is currently utilizing deduplication or not.

		Attribu	
Property	Туре	tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
DisplayName (v1.4+)	string	read-w rite (null)	This property shall contain a user-configurable string to name the volume.
Encrypted	boolean	read-w rite (null)	This property shall contain a boolean indicator if the Volume is currently utilizing encryption or not.
EncryptionTypes []	array (string (enum))	read-w rite	This property shall contain the types of encryption used by this Volume. For the possible property values, see EncryptionTypes in Property details.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
Identifiers [{}]	array (object)		This property shall contain a list of all known durable names for the associated volume. For property details, see Identifier v1.18.0).

		Attribu	
Property	Туре	tes	Notes
InitializeMethod (v1.6+)	string (enum)	read-o nly (null)	This property shall indicate the initialization method used for this volume. If InitializeMethod is not specified, the InitializeMethod should be Foreground. This valu reflects the most recently used Initialization Method, and may be changed using the Initialize Action. For the possible property values, see InitializeMethod in Property details.
IOPerfModeEnabled (v1.5+)	boolean	read-w rite (null)	This property shall indicate whether IO performance mode is enabled for the volume.
IOStatistics (v1.2+, deprecated v1.10) {}	object		The value shall represent IO statistics for this volume. For property details, see IOStatistics. Deprecated in v1.10 and later. This property is deprecated in favor of the IOStatistics property in VolumeMetrics.

352

		Attribu	
Property	Туре	tes	Notes
IsBootCapable (v1.7+)	boolean	read-w rite (null)	This property shall indicate whether or not the Volume contains a boot image and is capable of booting. This property may be settable by an admin or client with visibility into the contents of the volume. This property should only be set to true when VolumeUsage is either not specified, or when VolumeUsage is set to Data or SystemData.
Links {	object		The Links property, as described by the Redfish Specification, shall contain references to resources that are related to, but not contained by (subordinate to), this resource.
CacheDataVolumes (v1.6+) [ {	array		This shall be a pointer to the cache data volumes this volume serves as a cache volume. The corresponding VolumeUsage property shall be set to CacheOnly when this property is used.
@odata.id	string	read-o nly	Link to another Volume resource.
}]			

		Attribu	
Property	Туре	tes	Notes
CacheVolumeSource (v1.6+) {	object	* (null) *	This shall be a pointer to the cache volume source for this volume. The corresponding VolumeUsage property shall be set to Data when this property is used.
@odata.id	string	read-o nly	Link to another Volume resource.
ClassOfService (v1.1+) {	object		This property shall contain a reference to the ClassOfService that this storage volume conform to. See the <i>ClassOfService</i> schema for details on this property.
@odata.id	string	read-o nly	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.
ClientEndpoints (v1.4+) [ {	array		The value of this propert shall be references to the client Endpoints this volume is associated with.
@odata.id	string (URI)	read-o nly	The value of this propert shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.

		Attribu	
Property	Туре	tes	Notes
}]			
ConsistencyGroups (v1.4+) [ {	array		The value of this property shall be references to the ConsistencyGroups this volume is associated with.
@odata.id	string	read-o nly	Link to a ConsistencyGroup resource. See the Links section and the ConsistencyGroup schema for details.
}]			
Controllers (v1.9+) [ {	array		This parameter shall contain an array of the controllers (of type StorageController) associated with this volume. When the volume is of type NVMe, these may be both the physical and logical controller representations.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.

		Attribu	
Property	Туре	tes	Notes
DedicatedSpareDrives (v1.2+) [ {	array		The value of this property shall be a reference to the resources that this volume is associated with and shall reference resources of type Drive. This property shall only contain references to Drive entities which are currently assigned as a dedicated spare and are able to support this Volume.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
Drives [ {	array		The value of this property shall be a reference to the resources that this volume is associated with and shall reference resources of type Drive.
			This property shall only contain references to Drive entities which are currently members of the Volume, not hot spare Drives which are not currently a member of the volume.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
JournalingMedia (v1.5+) {	object	* (null) *	This shall be a pointer to the journaling media used for this Volume to address the write hole issue. Valid when WriteHoleProtectionPolicy property is set to "Journaling".
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

		Attribu	
Property	Туре	tes	Notes
OwningStorageResourc e (v1.5+) {	object		This shall be a pointer to the Storage resource that owns or contains this volume.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}			
OwningStorageService (v1.4+) {	object		This shall be a pointer to the StorageService that owns or contains this volume. See the StorageService schema for details on this property.
@odata.id	string	read-o nly	Link to a StorageService resource. See the Links section and the <i>StorageService</i> schema for details.
ProvidingStoragePool (v1.10+) {	object	* (null) *	This property shall contain a pointer to the StoragePool resource that provides this volume resource. See the StoragePool schema for details on this property.

358

		Attribu	
Property	Туре	tes	Notes
@odata.id	string	read-o nly	Link to a StoragePool resource. See the Links section and the StoragePool schema for details.
}			
ServerEndpoints (v1.4+) [	array		The value of this property shall be references to the server Endpoints this volume is associated with.
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
SpareResourceSets (v1.3+) [ {	array		Each referenced SpareResourceSet shall contain resources that may be utilized to replace the capacity provided by a failed resource having a compatible type.
@odata.id	string	read-w rite	Link to a SpareResourceSet resource. See the Links section and the SpareResourceSet schema for details.
}]			

	<u> </u>	Attribu	
Property	Туре	tes	Notes
StorageGroups (v1.4+) [ {	array		The value of this property shall be references to the StorageGroups this volume is associated with.
@odata.id	string	read-o nly	Link to a StorageGroup resource. See the Links section and the <i>StorageGroup</i> schema for details.
}]			
}			
LogicalUnitNumber (v1.4+)	integer	read-o nly (null)	This property shall contain host-visible LogicalUnitNumber assigned to this Volume. This property shall only be used when in a single connect configuration and no StorageGroup configuration is used.
LowSpaceWarningThres holdPercents (v1.1+) []	array (%) (integer , null)	read-w rite	Each time the following value is less than one of the values in the array the LOW_SPACE_THRESHOLD _WARNING event shall be triggered: Across all CapacitySources entries, percent = (SUM(AllocatedBytes) - SUM(ConsumedBytes))/SUM(AllocatedBytes).

		Attribu	
Property	Туре	tes	Notes
Manufacturer (v1.1+)	string	read-o nly (null)	This property shall contain a value that represents the manufacturer or implementer of the storage volume.
MaxBlockSizeBytes (v1.1+)	integer (By)	read-o nly (null)	This property shall contain size of the largest addressable unit of this storage volume.
MediaSpanCount (v1.4+)	integer	read-o nly (null)	This property shall indicate the number of media elements used per span in the secondary RAID for a hierarchical RAID type.
<b>Metrics</b> (v1.9+) {	object		This property shall contain a link to a resource of type VolumeMetrics that specifies the metrics for this volume. IO metrics are reported in the IOStatistics property. See the <i>VolumeMetrics</i> schema for details on this property.
@odata.id	string	read-o nly	Link to a VolumeMetrics resource. See the Links section and the <i>VolumeMetrics</i> schema for details.
}			

		Attribu	
Property	Туре	tes	Notes
<b>Model</b> (v1.1+)	string	read-o nly (null)	The value is assigned by the manufacturer and shall represents a specific storage volume implementation.
Name	string	read-o nly require d	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
NVMeNamespacePropert ies (v1.5+) {	object	* (null) *	This property shall contain properties to use when Volume is used to describe an NVMe Namespace.
FormattedLBASize (v1.5+)	string	read-o nly (null)	This property shall contain the LBA data size and metadata size combination that the namespace has been formatted with. This is a 4-bit data structure.
IsShareable (v1.5+)	boolean	read-w rite (null)	This property shall indicate whether the namespace is shareable.

		Attribu		
Property	Туре	tes	Notes	
LBAFormat (v1.9+) {	object	* (null) *	This property shall describe the current LBA format ID and corresponding detailed properties, such as the LBA data size and metadata size. Use the LBAFormats property to describe namespace capabilities in a collection capabilities annotation.	
LBADataSizeBytes (v1.9+)	integer	read-o nly (null)	This shall be the LBA data size reported in bytes.	
LBAFormatType (v1.9+)	string (enum)	read-o nly (null)	This shall be the LBA format type. This property is intended for capabilities instrumentation. For the possible property values, see LBAFormatType in Property details.	
LBAMetadataSizeBytes (v1.9+)	integer	read-o nly (null)	This shall be the LBA metadata size reported in bytes.	

Property	Type	Attribu tes	Notes
**RelativePerformance (v1.9+)	string (enum)	read-o nly (null)	This shall be the LBA Relative Performance type. This field indicates the relative performance of the LBA format indicated relative to other LBA formats supported by the controller. This property is intended for capabilities instrumentation. For the possible property values, see RelativePerformance in Property details.
} <b>LBAFormats</b> (v1.9+) [ {	array		This property shall describe the LBA format IDs and corresponding detailed properties, such as the LBA data size and metadata size. This property is intended for use in a collection capabilities annotation. Use the LBAFormat property on an instance of a namespace.
LBADataSizeBytes (v1.9+)	integer	read-o nly (null)	This shall be the LBA data size reported in bytes.

		Attribu	
Property	Туре	tes	Notes
LBAFormatType (v1.9+)	string (enum)	read-o nly (null)	This shall be the LBA format type. This property is intended for capabilities instrumentation. For the possible property values, see LBAFormatType in Property details.
LBAMetadataSizeBytes (v1.9+)	integer	read-o nly (null)	This shall be the LBA metadata size reported in bytes.
**RelativePerformance (v1.9+)	string (enum)	read-o nly (null)	This shall be the LBA Relative Performance type. This field indicates the relative performance of the LBA format indicated relative to other LBA formats supported by the controller. This property is intended for capabilities instrumentation. For the possible property values, see RelativePerformance in Property details.
**LBAFormatsSupported (v1.8+) []	array (string (enum))	read-o nly (null)	This shall be a list of the LBA formats supported for the namespace, or potential namespaces. For the possible property values, see LBAFormatsSupported in Property details.

		Attribu	
Property	Туре	tes	Notes
MetadataTransferredA tEndOfDataLBA (v1.5+)	boolean	read-o nly (null)	This property shall indicate whether or not the metadata is transferred at the end of the LBA creating an extended data LBA.
NamespaceFeatures (v1.5+) {	object	* (null) *	This property shall contain a set of Namespace Features.
SupportsAtomicTransa ctionSize (v1.5+)	boolean	read-o nly (null)	This property shall indicate whether or not the NVM fields for Namespace preferred write granularity (NPWG), write alignment (NPWA), deallocate granularity (NPDG), deallocate alignment (NPDA) and optimal write size (NOWS are defined for this namespace and should be used by the host for I/O optimization.
SupportsDeallocatedO rUnwrittenLBError (v1.5+)	boolean	read-o nly (null)	This property shall indicate that the controller supports deallocated or unwritten logical block error for this namespace.

		Attribu	
Property	Туре	tes	Notes
SupportsIOPerformanc eHints (v1.5+)	boolean	read-o nly (null)	This property shall indicate that the Namespace Atomic Write Unit Normal (NAWUN), Namespace Atomic Write Unit Power Fail (NAWUPF), and Namespace Atomic Compare and Write Unit (NACWU) fields are defined for this namespace and should be used by the host for this namespace instead of the controller-level properties AWUN, AWUPF and ACWU.
SupportsNGUIDReuse (v1.5+)	boolean	read-o nly (null)	This property shall indicate that the namespace supports the use of an NGUID (namespace globally unique identifier) value.
SupportsThinProvisio ning (v1.5+)	boolean	read-o nly (null)	This property shall indicate whether or not the NVMe Namespace supports thin provisioning. Specifically, the namespace capacity reported may be less than the namespace size.

		Attribu	
Property	Туре	tes	Notes
NamespaceId (v1.5+)	string	read-o nly (null)	This property shall contain the NVMe Namespace Identifier for this namespace. This property shall be a hex value. Namespace identifiers are not durable and do not have meaning outside the scope of the NVMe subsystem. NSID 0x0, 0xFFFFFFFF, 0xFFFFFFFF are special purpose values. Pattern: ^0[xX](([a-fA-F] [0-9])*)\$
NamespaceType (v1.9+)	string (enum)	read-o nly (null)	This shall identify the type of namespace. For the possible property values, see NamespaceType in Property details.
NumberLBAFormats (v1.5+)	integer (By)	read-o nly (null)	This property shall contain the number of LBA data size and metadata size combinations supported by this namespace. The value of this property is between 0 and 16. LBA formats with an index set beyond this value will not be supported.

		Attribu	Attribu	
Property	Туре	tes	Notes	
NVMeVersion (v1.5+)	string	read-o nly (null)	This property shall contain the version of the NVMe Base Specification supported.	
SupportsIOPerformanc eHints (v1.10+)	boolean	read-o nly (null)	This property shall indicate whether the namespace supports IO performance hints.	
SupportsMultipleName spaceAttachments (v1.10+)	boolean	read-o nly (null)	This property shall indicate whether the namespace may be attached to two or more controllers.	
<b>Type</b> (v1.8+)	string (enum)	read-o nly (null)	This shall identify the type of namespace. For the possible property values, see Type in Property details.	
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.	
Operations [ {	array		This property shall contain a list of all currently running on the Volume.	

		Attribu	
Property	Туре	tes	Notes
AssociatedFeaturesRe gistry {	object		This resource shall be used to represent a Feature registry for a Redfish implementation. See the <i>FeaturesRegistry</i> schema for details on this property.
@odata.id	string	read-o nly	Link to a FeaturesRegistry resource. See the Links section and the FeaturesRegistry schema for details.
}	a budan an		The same are suffered to the
Operation (v1.9+)	string (enum)	read-o nly (null)	This property shall contain the type of the operation. For the possible property values, see Operation in Property details.
<b>OperationName</b> (deprecated v1.9)	string	read-o nly (null)	The name of the operation. Deprecated in v1.9 and later. This property is deprecated in favor of the Operation property using the Operation enum.
PercentageComplete	integer	read-o nly (null)	The percentage of the operation that has been completed.
}]			

		Attribu	
Property	Туре	tes	Notes
OptimumIOSizeBytes	integer (By)	read-o nly (null)	This property shall contain the optimum IO size to use when performing IO on this volume. For logical disks this is the stripe size. For physical disks, this describes the physical sector size.
ProvisioningPolicy (v1.4+)	string (enum)	read-w rite(null)	This property shall specify the volume's supported storage allocation policy. For the possible property values, see ProvisioningPolicy in Property details.
<b>RAIDType</b> (v1.3.1+)	string (enum)	read-o nly (null)	This property shall contain the RAID type of the associated Volume. For the possible property values, see RAIDType in Property details.
ReadCachePolicy (v1.4+)	string (enum)	read-w rite(null)	This property shall contain a boolean indicator of the read cache policy for the Volume. For the possible property values, see ReadCachePolicy in Property details.

Property	Туре	Attribu tes	Notes
RecoverableCapacityS ourceCount (v1.3+)	integer	read-w rite (null)	The value is the number of available capacity source resources currently available in the event that an equivalent capacity source resource fails.
RemainingCapacityPer cent (v1.2+)	integer	read-o nly (null)	If present, this value shall return {[(SUM(AllocatedBytes) - SUM(ConsumedBytes)]/S UM(AllocatedBytes)}*1 00 represented as an integer value.
RemoteReplicaTargets (v1.8+) []	array (string, null)	read-o nly	The value shall reference the URIs to the remote target replicas that are sourced by this replica. Remote indicates that the replica is managed by a separate Swordfish service instance.
ReplicaInfo (v1.1+) {}	object		This property shall describe the replica relationship between this storage volume and a corresponding source volume. For property details, see ReplicaInfo v1.4.0).
ReplicaTargets (v1.3+) [ {	array		The value shall reference the target replicas that are sourced by this replica.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string (URI)	read-o nly	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
ReplicationEnabled (v1.9+)	boolean	read-w rite (null)	The property shall indicate whether or not replication is enabled on the volume. This property shall be consistent with the state reflected at the storage pool level.
Status {}	object		The property shall contain the status of the Volume. For property details, see Status.
StorageGroups (v1.1+, deprecated v1.9) {	object		The value of this property shall contain references to all storage groups that include this volume.  Contains a link to a resource. Deprecated in v1.9 and later. This property is deprecated in favor of the Connections property.
@odata.id	string	read-o nly	Link to Collection of StorageGroup. See the StorageGroup schema for details.

		Attribu	
Property	Туре	tes	Notes
StripSizeBytes (v1.4+)	integer (By)	read-w rite(null)	The number of consecutively addressed virtual disk blocks (bytes) mapped to consecutively addressed blocks on a single member extent of disk array. Synonym for stripe depth and chunk size.
VolumeType	string (enum)	read-o nly (null)	This property shall contain the type of the associated Volume. For the possible property values, see VolumeType in Property details.
VolumeUsage (v1.4+)	string (enum)	read-o nly (null)	This property shall contain the volume usage type for the Volume. For the possible property values, see VolumeUsage in Property details.
WriteCachePolicy (v1.4+)	string (enum)	read-w rite(null)	This property shall contain a boolean indicator of the write cache policy for the Volume. For the possible property values, see WriteCachePolicy in Property details.

Property	Туре	Attribu tes	Notes
WriteCacheState (v1.4+)	string (enum)	read-o nly (null)	This property shall contain the WriteCacheState policy setting for the Volume. For the possible property values, see WriteCacheState in Property details.
WriteHoleProtectionP olicy (v1.4+)	string (enum)	read-w rite	This property specifies the policy that is enabled to address the write hole issue on the RAID volume. If no policy is enabled at the moment, this property shall be set to "Off". For the possible property values, see WriteHoleProtectionPolicy in Property details.

### 9.6.40.4 Actions

# 9.6.40.4.1 AssignReplicaTarget (v1.4+) Description

This action shall be used to establish a replication relationship by assigning an existing volume to serve as a target replica for an existing source volume.

#### **Action URI**

{Base URI of target resource}/Actions/Volume.AssignReplicaTarget

### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 149.

**Table 149:** AssignReplicaTarget action parameters

Parameter Name	Туре	Attributes	Notes
ReplicaType	string (enum)	required	This parameter shall contain the type of replica relationship to be created (e.g., Clone, Mirror, Snap). For the possible property values, see ReplicaType in Property details.
ReplicaUpdateMod e	string (enum)	required	This parameter shall specify the replica update mode. For the possible property values, see ReplicaUpdateM ode in Property details.
TargetVolume	string	required	This parameter shall contain the Uri to the existing target volume.

# 9.6.40.4.2 ChangeRAIDLayout (v1.5+) Description

This action shall request the system to change the RAID layout of the volume. Depending on the combination of the submitted parameters, this could be changing the RAID type, changing the span count, changing the number of drives used by the volume, or another configuration change supported by the system. Note that usage of this action while online may potentially cause data loss if the available capacity is reduced.

### **Action URI**

{Base URI of target resource}/Actions/Volume.ChangeRAIDLayout

# **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 150.

**Table 150:** ChangeRAIDLayout action parameters

Parameter Name	Туре	Attributes	Notes
Drives [ {	array	optional	This parameter shall contain an array of the drives to be used by the volume.
@odata.id	string (URI)	read-only	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
}]			
MediaSpanCount	integer	optional	This parameter shall contain the requested number of media elements used per span in the secondary RAID for a hierarchical RAID type.

Parameter Name	Туре	Attributes	Notes
RAIDType	string (enum)	optional	This parameter shall contain the requested RAID type for the volume. For the possible property values, see RAIDType in Property details.
StripSizeBytes	integer	optional	This parameter shall contain the number of block (bytes) requested for the strip size.

### 9.6.40.4.3 CheckConsistency Description

This defines the name of the custom action supported on this resource.

#### **Action URI**

{Base URI of target resource}/Actions/Volume.CheckConsistency

## **Action parameters**

This action takes no parameters.

### 9.6.40.4.4 CreateReplicaTarget (v1.4+) Description

This action shall be used to create a new volume resource to provide expanded data protection through a replica relationship with the specified source volume.

#### **Action URI**

{Base URI of target resource}/Actions/Volume.CreateReplicaTarget

# **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 151.

 Table 151: CreateReplicaTarget action parameters

Parameter Name	Туре	Attributes	Notes
ReplicaType	string (enum)	required	This parameter shall contain the type of replica relationship to be created (e.g., Clone, Mirror, Snap). For the possible property values, see ReplicaType in Property details.
ReplicaUpdateMod e	string (enum)	required	This parameter shall specify the replica update mode. For the possible property values, see ReplicaUpdateM ode in Property details.
TargetStoragePoo l	string	required	This parameter shall contain the Uri to the existing StoragePool in which to create the target volume.
VolumeName	string	optional	This parameter shall contain the Name for the target volume.

# 9.6.40.4.5 ForceEnable (v1.5+) Description

This action shall request the system to force the volume to enabled state regardless of data loss scenarios.

#### **Action URI**

{Base URI of target resource}/Actions/Volume.ForceEnable

### **Action parameters**

This action takes no parameters.

## 9.6.40.4.6 Initialize (v1.5+) Description

This defines the name of the custom action supported on this resource. If Initial-izeMethod is not specified in the request body, but the property InitializeMethod is specified, the property InitializeMethod value should be used. If neither is specified, the InitializeMethod should be Foreground.

#### **Action URI**

{Base URI of target resource}/Actions/Volume.Initialize

#### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 152.

Table 152: Initialize action parameters

Parameter Name	Туре	Attributes	Notes
InitializeMethod	string (enum)	optional	This defines the property name for the action. For the possible property values, see InitializeMeth od in Property details.

Parameter Name	Type	Attributes	Notes
InitializeType	string (enum)	optional	This defines the property name for the action. For the possible property values, see InitializeType in Property details.

# 9.6.40.4.7 RemoveReplicaRelationship (v1.4+) Description

This action shall be used to disable data synchronization between a source and target volume, remove the replication relationship, and optionally delete the target volume.

#### **Action URI**

{Base URI of target resource}/Actions/Volume.RemoveReplicaRelationship

### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 153.

**Table 153:** RemoveReplicaRelationship action parameters

Parameter Name	Туре	Attributes	Notes
DeleteTargetVolu me	boolean	optional	This parameter shall indicate whether or not to delete the target volume as part of the operation. If not defined, the system should use its default behavior.

Parameter Name Type Attributes Notes  TargetVolume string required This parameter shall contain the Uri to the existing target volume.				
shall contain the Uri to the existing	Parameter Name	Туре	Attributes	Notes
	TargetVolume	string	required	shall contain the Uri to the existing

#### 9.6.40.4.8 ResumeReplication (v1.4+) Description

This action shall be used to resume the active data synchronization between a source and target volume, without otherwise altering the replication relationship.

#### **Action URI**

{Base URI of target resource}/Actions/Volume.ResumeReplication

#### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 154.

Table 154: ResumeReplication action parameters

Parameter Name	Туре	Attributes	Notes
TargetVolume	string	required	This parameter shall contain the Uri to the existing target volume.

### 9.6.40.4.9 ReverseReplicationRelationship (v1.4+) Description

This action shall be used to reverse the replication relationship between a source and target volume.

#### **Action URI**

{Base URI of target resource}/Actions/Volume.ReverseReplicationRelationship

#### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 155.

**Table 155:** ReverseReplicationRelationship action parameters

Parameter Name	Type	Attributes	Notes
TargetVolume	string	required	This parameter shall contain the Uri to the existing target volume.

### 9.6.40.4.10 SplitReplication (v1.4+) Description

This action shall be used to split the replication relationship and suspend data synchronization between a source and target volume.

#### **Action URI**

{Base URI of target resource}/Actions/Volume.SplitReplication

### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 156.

**Table 156:** SplitReplication action parameters

Parameter Name	Туре	Attributes	Notes
TargetVolume	string	required	This parameter shall contain the Uri to the existing target volume.

## 9.6.40.4.11 SuspendReplication (v1.4+) Description

This action shall be used to suspend active data synchronization between a source and target volume, without otherwise altering the replication relationship.

#### **Action URI**

{Base URI of target resource}/Actions/Volume.SuspendReplication

# **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the "target" property of the Action are summarized in Table 157.

**Table 157:** SuspendReplication action parameters

Parameter Name	Type	Attributes	Notes
TargetVolume	string	required	This parameter shall contain the Uri to the existing target volume.

# 9.6.40.5 Property details

**9.6.40.5.1 AccessCapabilities** The defined property values are listed in Table 158. Each entry shall specify a current storage access capability.

**Table 158:** AccessCapabilities property values

string	Description
Append	This enumeration literal shall indicate that the storage may be written only to append.
Execute	This value shall indicate that Execute access is allowed by the file share.
Read	This enumeration literal shall indicate that the storage may be read.
Streaming	This enumeration literal shall indicate that the storage may be read sequentially.
Write	This enumeration literal shall indicate that the storage may be written multiple times.
WriteOnce	This enumeration literal shall indicate that the storage may be written only once.
	·

**9.6.40.5.2 EncryptionTypes** The defined property values are listed in Table 159. This property shall contain the types of encryption used by this Volume.

**Table 159:** EncryptionTypes property values

string	Description
ControllerAssisted	The volume is being encrypted by the storage controller entity.
NativeDriveEncryption	The volume is utilizing the native drive encryption capabilities of the drive hardware.
SoftwareAssisted	The volume is being encrypted by software running on the system or the operating system.

**9.6.40.5.3 InitializeMethod** The defined property values are listed in Table 160. This defines the property name for the action.

Table 160: InitializeMethod property values

string	Description
Background	The volume will be available for use immediately, with data erasure and preparation to happen as background tasks.
Foreground	Data erasure and preparation tasks will complete before the volume is presented as available for use.
Skip	The volume will be available for use immediately, with no preparation.

**9.6.40.5.4 InitializeType** The defined property values are listed in Table 161. This defines the property name for the action.

**Table 161:** InitializeType property values

string	Description
Fast	The volume is prepared for use quickly, typically by erasing just the beginning and end of the space so that partitioning can be performed.
Slow	The volume is prepared for use slowly, typically by completely erasing the volume.

**9.6.40.5.5 LBAFormatsSupported** The defined property values are listed in Table 162. This shall be a list of the LBA formats supported for the namespace, or potential namespaces.

**Table 162:** LBAFormatsSupported property values

string	Description
LBAFormat0	LBAFormat0 is a required type. Indicates the LBA data size supported.
LBAFormat1	Indicates the LBA data size if supported.
LBAFormat10	Indicates the LBA data size supported if supported.
LBAFormat11	Indicates the LBA data size supported if supported.
LBAFormat12	Indicates the LBA data size supported if supported.
LBAFormat13	Indicates the LBA data size supported if supported.
LBAFormat14	Indicates the LBA data size supported if supported.
LBAFormat15	Indicates the LBA data size supported if supported.
LBAFormat2	Indicates the LBA data size supported if supported.

string	Description
LBAFormat3	Indicates the LBA data size supported if supported.
LBAFormat4	Indicates the LBA data size supported if supported.
LBAFormat5	Indicates the LBA data size supported if supported.
LBAFormat6	Indicates the LBA data size supported if supported.
LBAFormat7	Indicates the LBA data size supported if supported.
LBAFormat8	Indicates the LBA data size supported if supported.
LBAFormat9	Indicates the LBA data size supported if supported.

**9.6.40.5.6 LBAFormatType** The defined property values are listed in Table 163. This shall be the LBA format type. This property is intended for capabilities instrumentation.

**Table 163:** LBAFormatType property values

string	Description
LBAFormat0	LBAFormat0 is a required type. Indicates the LBA data size supported.
LBAFormat1	Indicates the LBA data size if supported.
LBAFormat10	Indicates the LBA data size supported if supported.
LBAFormat11	Indicates the LBA data size supported if supported.
LBAFormat12	Indicates the LBA data size supported if supported.
LBAFormat13	Indicates the LBA data size supported if supported.

string	Description
LBAFormat14	Indicates the LBA data size supported if supported.
LBAFormat15	Indicates the LBA data size supported if supported.
LBAFormat2	Indicates the LBA data size supported if supported.
LBAFormat3	Indicates the LBA data size supported if supported.
LBAFormat4	Indicates the LBA data size supported if supported.
LBAFormat5	Indicates the LBA data size supported if supported.
LBAFormat6	Indicates the LBA data size supported if supported.
LBAFormat7	Indicates the LBA data size supported if supported.
LBAFormat8	Indicates the LBA data size supported if supported.
LBAFormat9	Indicates the LBA data size supported if supported.

**9.6.40.5.7 NamespaceType** The defined property values are listed in Table 164. This shall identify the type of namespace.

**Table 164:** NamespaceType property values

string	Description
Block	The namespace is configured for use with a block storage interface.
Computational	The namespace is configured for use with a computational storage interface.
KeyValue	The namespace is configured for use with a KeyValue interface.

string	Description
ZNS	The namespace is configured for use with a zoned storage interface.

**9.6.40.5.8 Operation** The defined property values are listed in Table 165. This property shall contain the type of the operation.

Table 165: Operation property values

string	Description
ChangeRAIDType	A ChangeRAIDType operation is being performed.
ChangeStripSize (v1.10+)	A ChangeStripSize operation is being performed.
CheckConsistency	A CheckConsistency operation is being performed.
Compress	A Compress operation is being performed.
Decrypt	A Decrypt operation is being performed.
Deduplicate	A Deduplicate operation is being performed.
Delete	A Delete operation is being performed.
Encrypt	An Encrypt operation is being performed.
Format	A Format operation is being performed.
Initialize	An Initialize operation is being performed.
Rebuild	A Rebuild operation is being performed.
Replicate	A Replicate operation is being performed.
Resize	A Resize operation is being performed.

string	Description
Sanitize	A Sanitize operation is being performed.

**9.6.40.5.9 ProvisioningPolicy** The defined property values are listed in Table 166. This property shall specify the volume's supported storage allocation policy.

**Table 166:** ProvisioningPolicy property values

string	Description
Fixed	This enumeration literal specifies storage shall be fully allocated.
Thin	This enumeration literal specifies storage may be over allocated.

**9.6.40.5.10 RAIDType** The defined property values are listed in Table 167. This parameter shall contain the requested RAID type for the volume.

**Table 167:** RAIDType property values

string	Description
None (v1.4.2+)	A placement policy with no redundancy at the device level.
RAID0	A placement policy where consecutive logical blocks of data are uniformly distributed across a set of independent storage devices without offering any form of redundancy. This is commonly referred to as data striping. This form of RAID will encounter data loss with the failure of any storage device in the set.

string	Description
RAID00	A placement policy that creates a RAID 0 stripe set over two or more RAID 0 sets. This is commonly referred to as RAID 0+0. This form of data layout is not fault tolerant; if any storage device fails there will be data loss.
RAID01	A data placement policy that creates a mirrored device (RAID 1) over a set of striped devices (RAID 0). This is commonly referred to as RAID 0+1 or RAID 0/1. Data stored using this form of RAID is able to survive a single RAID 0 data set failure without data loss.
RAID1	A placement policy where each logical block of data is stored on more than one independent storage device. This is commonly referred to as mirroring. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID10	A placement policy that creates a striped device (RAID 0) over a set of mirrored devices (RAID 1). This is commonly referred to as RAID 1/0. Data stored using this form of RAID is able to survive storage device failures in each RAID 1 set without data loss.
RAID10E	A placement policy that uses a RAID 0 stripe set over two or more RAID 10 sets. This is commonly referred to as Enhanced RAID 10.  Data stored using this form of RAID is able to survive a single device failure within each nested RAID 1 set without data loss.
RAID10Triple	A placement policy that uses a striped device (RAID 0) over a set of triple mirrored devices (RAID 1Triple). This form of RAID can survive up to two failures in each triple mirror set without data loss.

string	Description
RAID1E	A placement policy that uses a form of mirroring implemented over a set of independent storage devices where logical blocks are duplicated on a pair of independen storage devices so that data is uniformly distributed across the storage devices. This is commonly referred to as RAID 1 Enhanced. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID1Triple	A placement policy where each logical block of data is mirrored three times across a set of three independent storage devices. This is commonly referred to as three-way mirroring. This form of RAID can survive two device failures without data loss.
RAID3	A placement policy using parity-based protection where logical bytes of data are uniformly distributed across a set of independent storage devices and where the parity is stored on a dedicated independent storage device. Data stored using this form of RAID is able to survive a single storage device failure without data loss. If the storage devices use rotating media, they are assumed to be rotationally synchronized, and the data stripe size should be no larger than the exported block size.
RAID4	A placement policy using parity-based protection where logical blocks of data are uniformly distributed across a set of independent storage devices and where the parity is stored on a dedicated independent storage device. Data stored using this form of RAID is able to survive a single storage device failure without data loss.

string	Description
RAID5	A placement policy using parity-based protection for storing stripes of "n" logical blocks of data and one logical block of parity across a set of "n+1" independent storage devices where the parity and data blocks are interleaved across the storage devices. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID50	A placement policy that uses a RAID 0 stripe set over two or more RAID 5 sets of independent storage devices. Data stored using this form of RAID is able to survive a single storage device failure within each RAID 5 set without data loss.
RAID6	A placement policy using parity-based protection for storing stripes of "n" logical blocks of data and two logical blocks of independent parity across a set of "n+2" independent storage devices where the parity and data blocks are interleaved across the storage devices. Data stored using this form of RAID is able to survive any two independent storage device failures without data loss.
RAID60	A placement policy that uses a RAID 0 stripe set over two or more RAID 6 sets of independent storage devices. Data stored using this form of RAID is able to survive two device failures within each RAID 6 set without data loss.

string	Description
RAID6TP	A placement policy that uses parity-based
	protection for storing stripes of "n" logical
	blocks of data and three logical blocks of
	independent parity across a set of "n+3"
	independent storage devices where the parity
	and data blocks are interleaved across the
	storage devices. This is commonly referred to
	as Triple Parity RAID. Data stored using this
	form of RAID is able to survive any three
	independent storage device failures without
	data loss.

**9.6.40.5.11 ReadCachePolicy** The defined property values are listed in Table 168. This property shall contain a boolean indicator of the read cache policy for the Volume.

Table 168: ReadCachePolicy property values

string	Description
AdaptiveReadAhead	A caching technique in which the controller dynamically determines whether to pre-fetch data anticipating future read requests, based on previous cache hit ratio.
Off	The read cache is disabled.
ReadAhead	A caching technique in which the controller pre-fetches data anticipating future read requests.

**9.6.40.5.12 RelativePerformance** The defined property values are listed in Table 169. This shall be the LBA Relative Performance type. This field indicates the relative performance of the LBA format indicated relative to other LBA formats supported by the controller. This property is intended for capabilities instrumentation.

**Table 169:** RelativePerformance property values

string	Description
Best	Best performance.
Better	Better performance.
Degraded	Degraded performance.
Good	Good performance.

**9.6.40.5.13 ReplicaType** The defined property values are listed in Table 170. This parameter shall contain the type of replica relationship to be created (e.g., Clone, Mirror, Snap).

**Table 170:** ReplicaType property values

string	Description
Clone	This enumeration literal shall indicate that replication shall create a point in time, full copy the source.
Mirror	This enumeration literal shall indicate that replication shall create and maintain a copy of the source.
Snapshot	This enumeration literal shall indicate that replication shall create a point in time, virtual copy of the source.
TokenizedClone	This enumeration literal shall indicate that replication shall create a token based clone.

**9.6.40.5.14 ReplicaUpdateMode** The defined property values are listed in Table 171. This parameter shall specify the replica update mode.

**Table 171:** ReplicaUpdateMode property values

string	Description
Active	This enumeration literal shall indicate Active-Active (i.e. bidirectional) synchronous updates.
Adaptive	This enumeration literal shall indicate that an implementation may switch between synchronous and asynchronous modes.
Asynchronous	This enumeration literal shall indicate Asynchronous updates.
Synchronous	This enumeration literal shall indicate Synchronous updates.

**9.6.40.5.15 Type** The defined property values are listed in Table 172. This shall identify the type of namespace.

**Table 172:** Type property values

string	Description
Block	The namespace is configured for use with a block storage interface.
Computational	The namespace is configured for use with a computational storage interface.
KeyValue	The namespace is configured for use with a KeyValue interface.
ZNS	The namespace is configured for use with a zoned storage interface.

**9.6.40.5.16 VolumeType** The defined property values are listed in Table 173. This property shall contain the type of the associated Volume.

**Table 173:** VolumeType property values

string	Description
Mirrored	The volume is a mirrored device.
NonRedundant	The volume is a non-redundant storage device.
RawDevice	The volume is a raw physical device without any RAID or other virtualization applied.
SpannedMirrors	The volume is a spanned set of mirrored devices.
SpannedStripesWithParity	The volume is a spanned set of devices which uses parity to retain redundant information.
StripedWithParity	The volume is a device which uses parity to retain redundant information.

**9.6.40.5.17 VolumeUsage** The defined property values are listed in Table 174. This property shall contain the volume usage type for the Volume.

**Table 174:** VolumeUsage property values

string	Description
CacheOnly	The volume shall be allocated for use as a non-consumable cache only volume.
Data	The volume shall be allocated for use as a consumable data volume.
ReplicationReserve	The volume shall be allocated for use as a non-consumable reserved volume for replication use.
SystemData	The volume shall be allocated for use as a consumable data volume reserved for system use.
SystemReserve	The volume shall be allocated for use as a non-consumable system reserved volume.

397

**9.6.40.5.18 WriteCachePolicy** The defined property values are listed in Table 175. This property shall contain a boolean indicator of the write cache policy for the Volume.

**Table 175:** WriteCachePolicy property values

string	Description
Off (v1.4.1+)	Indicates that the write cache shall be disabled.
ProtectedWriteBack	A caching technique in which the completion of a write request is signaled as soon as the data is in cache, and actual writing to non-volatile media is guaranteed to occur at a later time.
UnprotectedWriteBack	A caching technique in which the completion of a write request is signaled as soon as the data is in cache; actual writing to non-volatile media is not guaranteed to occur at a later time.
WriteThrough	A caching technique in which the completion of a write request is not signaled until data is safely stored on non-volatile media.

**9.6.40.5.19 WriteCacheState** The defined property values are listed in Table 176. This property shall contain the WriteCacheState policy setting for the Volume.

**Table 176:** WriteCacheState property values

21 May 2024

string	Description
Degraded	Indicates an issue with the cache state in which the cache space is diminished or disabled due to a failure or an outside influence such as a discharged battery.
Protected	Indicates that the cache state type in use generally protects write requests on non-volatile media.

**Working Draft** 

string	Description
Unprotected	Indicates that the cache state type in use generally does not protect write requests on non-volatile media.

**9.6.40.5.20 WriteHoleProtectionPolicy** The defined property values are listed in Table 177. This property specifies the policy that is enabled to address the write hole issue on the RAID volume. If no policy is enabled at the moment, this property shall be set to "Off".

**Table 177:** WriteHoleProtectionPolicy property values

string	Description
DistributedLog	The policy that distributes additional log (e.q. checksum of the parity) among the volume's capacity sources to address write hole issue.  Additional data is used to detect data corruption on the volume.
Journaling	The policy that uses separate block device for write-ahead logging to address write hole issue. All write operations on the RAID volume are first logged on dedicated journaling device that is not part of the volume.
Oem	The policy that is Oem specific. The mechanism details are unknown unless provided separately by the Oem.
Off	The support for addressing the write hole issue is disabled. The volume is not performing any additional activities to close the RAID write hole.

#### 9.6.41 VolumeCollection

**9.6.41.1 URIs** /redfish/v1/CompositionService/ResourceBlocks/{ResourceBlockId}/Storage/{StorageId}/Vo /redfish/v1/CompositionService/ResourceBlocks/{ResourceBlockId}/Systems/{ComputerSystemId}/Storage/{-/redfish/v1/ResourceBlocks/{ResourceBlockId}/Storage/{StorageId}/Volumes /redfish/v1/ResourceBlocks/{ResourceBlockId}/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes /redfish/v1/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId}/Volumes /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingVolume /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedVolumes /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/Providin /redfish/v1/Storage/{StorageId}/Volumes/redfish/v1/StorageServices/{StorageServiceId}/ConsistencyGroups /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySources /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/AllocatedVolumes /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySou /redfish/v1/StorageServices/{StorageServiceId}/Volumes/redfish/v1/StorageServices/{StorageServiceId}/Volumes/redfish/v1/StorageServices/{StorageServiceId}/Volumes/redfish/v1/StorageServices/ /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId}/Volume /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/ /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedVolum /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySource /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes

# **9.6.41.2 Properties** The properties defined for the VolumeCollection schema are summarized in Table 178.

Table 178: VolumeCollection properties

Property	Туре	Attribu tes	Notes
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Members [ {	array		The value of each member entry shall reference a Volume resource.

		Attribu	
Property	Туре	tes	Notes
@odata.id	string	read-o nly	Link to a Volume resource See the Links section and the <i>Volume</i> schema for details.
}]			
Members@odata.nextL ink	string (URI)	read-o nly	The value of this property shall be a URI to a resource, with the same @odata.type, containing the next set of partial members.
Name	string	read-o nly	This property shall contain the name of this resource or array member. The value shall conform with the "Name" clause of the Redfish Specification.
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.

# 9.6.42 VolumeMetrics 1.1.1

**9.6.42.1 Description** The VolumeMetrics schema shall contain the usage and health statistics for a volume in a Redfish implementation.

**9.6.42.2 URIs** /redfish/v1/CompositionService/ResourceBlocks/{ResourceBlockId}/Storage/{StorageId}/Vo /redfish/v1/CompositionService/ResourceBlocks/{ResourceBlockId}/Systems/{ComputerSystemId}/Storage/{-/redfish/v1/ResourceBlocks/{ResourceBlockId}/Storage/{StorageId}/Volumes/{VolumeId}/Metrics /redfish/v1/ResourceBlocks/{ResourceBlockId}/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{ /redfish/v1/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId}/Volumes/{VolumeId}/Metrics /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingVolume /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedVolumes/{VolumeId}/Metrics /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/Providin /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/Metrics/redfish/v1/StorageServices/{StorageServiceId}/ /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySources /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/AllocatedVolumes/{VolumeId}/ /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySou /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/Pr /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/Metrics fish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId}/Volume /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/ /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedVolum /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySource /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}/Metrics

**9.6.42.3 Properties** The properties defined for the VolumeMetrics 1.1.1 schema are summarized in Table 179.

**Table 179:** VolumeMetrics 1.1.1 properties

		Attribu	
Property	Туре	tes	Notes
Actions {}	object		This property shall contain the available actions for this resource.
ConsistencyCheckCoun t (v1.1+)	number	read-o nly (null)	This property shall contain the number of consistency checks completed over the lifetime of the volume.

		Attribu	
Property	Туре	tes	Notes
ConsistencyCheckErro rCount	number	read-o nly (null)	This property shall contain the number of consistency check errors over the lifetime of the volume.
CorrectableIOReadErr orCount	integer	read-o nly (null)	This property shall contain the number of the correctable read errors for the lifetime of the volume.
CorrectableIOWriteEr rorCount	integer	read-o nly (null)	This property shall contain the number of the correctable write errors for the lifetime of the volume.
Description	string	read-o nly (null)	This property shall contain the description of this resource. The value shall conform with the "Description" clause of the Redfish Specification.
Id	string	read-o nly require d	This property shall contain the identifier for this resource. The value shall conform with the "Id" clause of the Redfish Specification.
IOStatistics (v1.1+) {}	object		The value shall represent IO statistics for this volume. For property details, see IOStatistics.

		Attribu	
Property	Туре	tes	Notes
Name	string	read-o nly require d	This property shall contain the name of this resource or array member The value shall conform with the "Name" clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-describe d requirements. For property details, see Oem.
RebuildErrorCount	number	read-o nly (null)	This property shall contain the number of rebuild errors over the lifetime of the volume.
StateChangeCount	number	read-o nly (null)	This property shall contain the number of state changes (changes in Status.State) for this volume.
UncorrectableIOReadE rrorCount	integer	read-o nly (null)	This property shall contain the number of the uncorrectable read errors for the lifetime of the volume.

		Attribu	
Property	Туре	tes	Notes
UncorrectableIOWrite ErrorCount	integer	read-o nly (null)	This property shall contain the number of the uncorrectable write errors for the lifetime of the volume.

# **Annex A: Bibliography**

#### A.1 Overview

The following referenced documents provide important support for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

### A.2 Informational references

The informational references are summarized in Table A.1.

Tag	Title (Version)	Author	URL
Errors	Swordfish Scalable Storage Management Error Handling Guide	SNIA	<a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/ssmi/swordfish&gt;</a>
Metri cs	Swordfish Metrics White Paper	SNIA	<a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/s/smi/swordfish</a>
NVMe	Swordfish NVMe Model Overview and Mapping Guide	SNIA	<a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/s/smi/swordfish</a>
Profi les	Swordfish Profile Bundle	SNIA	<a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/s/smi/swordfish</a>
Profi les	Swordfish Profile Bundle	SNIA	<a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/s/smi/swordfish</a>
Prope rties	Swordfish Property Guide	SNIA	<a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/s/smi/swordfish</a>
Schem a	Swordfish Schema and Registries Bundle	SNIA	<a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/s/smi/swordfish</a>
Templ ates	Swordfish Templates Bundle	SNIA	<a href="https://www.snia.org/forums/s/smi/swordfish">https://www.snia.org/forums/s/smi/swordfish</a>

Title (Version)	Author	URL
TLS Specification for Storage Systems	SNIA	<a href="https://www.snia.org/tech_activities/standards/curr_s">https://www.snia.org/tech_activities/standards/curr_s</a> tandards/tls>
Swordfish Scalable Storage Management API User's Guide	SNIA	<a href="https://www.snia.org/forums/s/smi/swordfish">https://www.snia.org/forums/s/smi/swordfish&gt;</a>
	TLS Specification for Storage Systems Swordfish Scalable Storage Management API	TLS Specification for SNIA Storage Systems  Swordfish Scalable SNIA Storage Management API

Table A.1: Informational References