



# Swordfish NVMe Model Overview and Mapping Guide

Version: 1.2.4

**Abstract:** The Swordfish NVMe Model Overview and Mapping Guide defines the model to manage NVMe and NVMeoF storage systems with Redfish and Swordfish. It provides the detailed mapping information between the NVMe, NVMeoF specifications and the Redfish and Swordfish specifications.

## Working Draft

*Publication of this Working Draft for review and comment has been approved by the Scalable Storage Management Technical Work Group. This draft represents a 'best effort' attempt by the Scalable Storage Management Technical Work Group to reach preliminary consensus, and it may be updated, replaced, or made obsolete at any time. This document should not be used as reference material or cited as other than a 'work in progress.' Suggestions for revision should be directed to <http://www.snia.org/feedback>.*

*Last Updated: 12 April 2022*

## Contents

USAGE . . . . .	15
DISCLAIMER . . . . .	16
Current Revision . . . . .	16
Contact SNIA . . . . .	16
FEEDBACK AND INTERPRETATIONS . . . . .	16
INTENDED AUDIENCE . . . . .	17
VERSIONING POLICY . . . . .	17
Revision History . . . . .	17
About SNIA . . . . .	18
Acknowledgements . . . . .	19
<b>1 Abstract</b>	<b>20</b>
<b>2 Scope</b>	<b>21</b>
2.1 Document Goals . . . . .	21
2.2 Audience Assumptions . . . . .	21
<b>3 Normative References</b>	<b>22</b>
3.1 Overview . . . . .	22
3.2 Approved references . . . . .	22
3.3 References under development . . . . .	24
3.4 Other references . . . . .	24
<b>4 NVMe Model Overview</b>	<b>25</b>
4.1 Introduction . . . . .	25
4.1.1 Fundamental Model Design Assertions . . . . .	25
4.2 Overall NVMe Subsystem Model . . . . .	26
4.2.1 Major NVM Objects Mapped to RF/SF . . . . .	26
4.2.2 Unmapped objects . . . . .	27
4.2.3 NVM Subsystem Model . . . . .	27
4.2.4 NVMe-oF Subsystem Model . . . . .	28
<b>5 Example Instances</b>	<b>30</b>
5.1 Introduction . . . . .	30
5.2 Simple SSD . . . . .	30
5.2.1 Overview . . . . .	30
5.2.2 Explanation of Object use . . . . .	31
5.2.3 Redfish / Swordfish Object Representation . . . . .	31

---

5.2.4	Mockup . . . . .	31
5.3	Complex SSD . . . . .	32
5.3.1	Overview . . . . .	32
5.3.2	Explanation of Object use . . . . .	32
5.3.3	Redfish / Swordfish Object Representation . . . . .	33
5.4	Simple SSD with IP (NVMe-oF) Attach . . . . .	33
5.4.1	Overview . . . . .	33
5.4.2	Explanation of Object use . . . . .	34
5.4.3	Redfish / Swordfish Object Representation . . . . .	34
5.4.4	Mockup . . . . .	35
5.5	JBOF . . . . .	35
5.5.1	Overview . . . . .	35
5.5.2	Explanation of Object use . . . . .	36
5.5.3	Redfish / Swordfish Object Representation . . . . .	37
5.5.4	Mockup . . . . .	37
5.6	EBOF . . . . .	37
5.6.1	Overview . . . . .	37
5.6.2	Explanation of Object use . . . . .	38
5.6.3	Redfish / Swordfish Object Representation . . . . .	38
5.6.4	Mockup . . . . .	39
5.7	Opaque Array / NVMe Front End Device . . . . .	40
5.7.1	Overview . . . . .	40
5.7.2	Explanation of Object use . . . . .	40
5.7.3	Redfish / Swordfish Object Representation . . . . .	41
5.7.4	Mockup . . . . .	41
5.8	Subsystem (Fabric) Model - NVMe-oF: Fabric Attach Subsystem . . . . .	41
5.8.1	Overview . . . . .	41
5.8.2	Explanation of Object use . . . . .	42
5.8.3	Redfish / Swordfish Object Representation . . . . .	42
5.8.4	Mockup . . . . .	43
5.9	NVMe Domains . . . . .	43
5.9.1	Overview . . . . .	43
5.9.2	Explanation of Object use . . . . .	44
5.9.3	Mockup . . . . .	44
<b>6</b>	<b>Property Mapping</b>	<b>45</b>
6.1	Introduction . . . . .	45
6.2	Property Mapping Template . . . . .	45

---

6.3	NVM subsystem . . . . .	47
6.3.1	Mockup . . . . .	47
6.3.2	Property Mapping . . . . .	48
6.4	NVM Controllers . . . . .	70
6.4.1	Admin Controller . . . . .	71
6.4.2	Discovery Controller . . . . .	108
6.4.3	IO Controller . . . . .	141
6.5	Namespace . . . . .	202
6.5.1	Mockup . . . . .	202
6.5.2	Property Mapping . . . . .	203
6.6	Endurance Group . . . . .	252
6.6.1	Mockup . . . . .	252
6.6.2	Property Mapping . . . . .	253
6.7	NVM Set . . . . .	281
6.7.1	Mockup . . . . .	281
6.7.2	Property Mapping . . . . .	282
6.8	Drive . . . . .	310
6.8.1	Mockup . . . . .	310
6.8.2	Property Mapping . . . . .	311
<b>7</b>	<b>Other Feature Mapping</b>	<b>345</b>
7.1	Introduction . . . . .	345
7.2	Firmware Update . . . . .	345
7.2.1	Firmware update for NVMe Drives . . . . .	345
	<b>Appendix A: Objects without a direct mapping to the NVMe model</b>	<b>348</b>
A.1:	Overview . . . . .	348
A.2:	Related Use Cases . . . . .	349
	<b>Annex B: Bibliography</b>	<b>350</b>
B.1	Overview . . . . .	350
B.2	Informational references . . . . .	350

## List of Tables

1	Revision History . . . . .	18
2	Contributors . . . . .	19
3	Approved normative references . . . . .	22
4	Property Mapping Template and Example . . . . .	46
5	Actions.#StorageController.SetEncryptionKey mapping . . . . .	48
6	Controllers mapping . . . . .	49
7	Description mapping . . . . .	50
8	Drives mapping . . . . .	51
9	Identifiers mapping . . . . .	52
10	Identifiers.DurableNameFormat mapping . . . . .	53
11	Identifiers.DurableName mapping . . . . .	54
12	Links.Enclosures mapping . . . . .	55
13	Links.Enclosures@odata.count mapping . . . . .	57
14	Links.Enclosures mapping . . . . .	58
15	Links.SimpleStorage mapping . . . . .	59
16	Name mapping . . . . .	59
17	Status.State mapping . . . . .	62
18	Status.Health mapping . . . . .	64
19	Status.HealthRollup mapping . . . . .	66
20	StorageControllers mapping . . . . .	68
21	StorageGroups mapping . . . . .	69
22	Volumes mapping . . . . .	70
23	Assembly mapping . . . . .	72
24	Assembly mapping . . . . .	73
25	CacheSummary mapping . . . . .	74
26	ControllerRates mapping . . . . .	75
27	Description mapping . . . . .	76
28	FirmwareVersion mapping . . . . .	77
29	Identifiers mapping . . . . .	78
30	Identifiers.DurableName mapping . . . . .	79
31	Identifiers.DurableNameFormat mapping . . . . .	80
32	Links.AttachedVolumes mapping . . . . .	81
33	Links.NetworkDeviceFunctions mapping . . . . .	82
34	Location mapping . . . . .	83
35	Manufacturer mapping . . . . .	84
36	Model mapping . . . . .	85

37	Name mapping . . . . .	86
38	NVMeControllerProperties.ControllerType mapping . . . . .	87
39	NVMeControllerProperties.NVMeVersion mapping . . . . .	88
40	NVMeControllerProperties.NVMeControllerAttributes.ReportsNamespaceGranularity mapping . . . . .	89
41	NVMeControllerProperties.NVMeControllerAttributes. SupportsSQAsociations mapping . . . . .	91
42	NVMeControllerProperties.NVMeControllerAttributes. SupportsTrafficBasedKeepAlive mapping . . . . .	92
43	NVMeControllerProperties.NVMeControllerAttributes. SupportsExceedingPowerOfNonOperationalState mapping . . . . .	94
44	NVMeControllerProperties.NVMeControllerAttributes. Supports128BitHostId mapping . . . . .	96
45	NVMeControllerProperties.ANCharacteristics mapping . . . . .	97
46	NNVMeControllerProperties.ANCharacteristics mapping . . . . .	98
47	NVMeControllerProperties.NVMeSMARTCriticalWarnings. OverallSystemDegraded mapping . . . . .	99
48	NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed mapping . . . . .	100
49	SKU mapping . . . . .	101
50	SpeedGbps mapping . . . . .	102
51	Status.Health mapping . . . . .	103
52	Status.State mapping . . . . .	104
53	SupportedControllerProtocols mapping . . . . .	106
54	SupportedDeviceProtocols mapping . . . . .	107
55	Assembly mapping . . . . .	109
56	Assembly mapping . . . . .	111
57	CacheSummary mapping . . . . .	112
58	ControllerRates mapping . . . . .	113
59	Description mapping . . . . .	114
60	FirmwareVersion mapping . . . . .	115
61	Identifiers mapping . . . . .	115
62	Identifiers.DurableName mapping . . . . .	116
63	Identifiers.DurableNameFormat mapping . . . . .	117
64	Links.AttachedVolumes mapping . . . . .	117
65	Links.Endpoints mapping . . . . .	119
66	Links.Connections mapping . . . . .	120
67	Links.NetworkDeviceFunctions mapping . . . . .	120

68	Location mapping	121
69	Manufacturer mapping	122
70	Model mapping	123
71	Name mapping	124
72	NVMeControllerProperties.ControllerType mapping	125
73	NVMeControllerProperties.NVMeVersion mapping	126
74	NVMeControllerProperties.NVMeControllerAttributes. SupportsTraf- ficBasedKeepAlive mapping	127
75	NVMeControllerProperties.NVMeControllerAttributes. SupportsEx- ceedingPowerOfNonOperationalState mapping	129
76	NVMeControllerProperties.NVMeControllerAttributes. Sup- ports128BitHostId mapping	131
77	NVMeControllerProperties.ANACHaracteristics mapping	132
78	NVMeControllerProperties.NVMeSMARTCriticalWarnings. OverallSub- systemDegraded mapping	133
79	NVMeControllerProperties.NVMeSMARTCriticalWarnings. SpareCa- pacityWornOut mapping	134
80	NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed mapping	135
81	Status.Health mapping	136
82	Status.State mapping	137
83	SupportedControllerProtocols mapping	139
84	SupportedDeviceProtocols mapping	140
85	Assembly mapping	143
86	Assembly mapping	145
87	CacheSummary mapping	146
88	ControllerRates mapping	147
89	Description mapping	148
90	FirmwareVersion mapping	149
91	Identifiers mapping	149
92	Identifiers.DurableName mapping	150
93	Identifiers.DurableNameFormat mapping	151
94	Links.AttachedVolumes mapping	152
95	Links.Endpoints mapping	153
96	Links.Connections mapping	154
97	Links.NetworkDeviceFunctions mapping	154
98	Location mapping	155
99	Manufacturer mapping	156

100	Model mapping . . . . .	157
101	Name mapping . . . . .	157
102	NVMeControllerProperties.ControllerType mapping . . . . .	159
103	NVMeControllerProperties.NVMeVersion mapping . . . . .	160
104	NVMeControllerProperties.NVMeControllerAttributes.ReportsUUIDList mapping . . . . .	161
105	NVMeControllerProperties.NVMeControllerAttributes. SupportsSQAs- sociations mapping . . . . .	162
106	NVMeControllerProperties.NVMeControllerAttributes. Report- sNamespaceGranularity mapping . . . . .	163
107	NVMeControllerProperties.NVMeControllerAttributes. Report- sNamespaceGranularity mapping . . . . .	165
108	NVMeControllerProperties.NVMeControllerAttributes. TrafficBased- KeepAlive mapping . . . . .	167
109	NVMeControllerProperties.NVMeControllerAttributes. SupportsPre- dictableLatencyMode mapping . . . . .	170
110	NVMeControllerProperties.NVMeControllerAttributes. Support- sEnduranceGroups mapping . . . . .	171
111	NVMeControllerProperties.NVMeControllerAttributes. SupportsRead- RecoveryLevels mapping . . . . .	173
112	NVMeControllerProperties.NVMeControllerAttributes. SupportsNVM- Sets mapping . . . . .	174
113	NVMeControllerProperties.NVMeControllerAttributes. SupportsEx- ceedingPowerOfNonOperationalState mapping . . . . .	176
114	NVMeControllerProperties.NVMeControllerAttributes. Sup- ports128BitHostId mapping . . . . .	178
115	NVMeControllerProperties.ANACCharacteristics mapping . . . . .	179
116	NNVMeControllerProperties.ANACCharacteristics mapping . . . . .	180
117	NNVMeControllerProperties.ANACCharacteristics.AccessState mapping	181
118	NNVMeControllerProperties.ANACCharacteristics.Volume mapping . .	182
119	NNVMeControllerProperties.NVMeSMARTCriticalWarnings.PRMunreliable mapping . . . . .	184
120	NVMeControllerProperties.NVMeSMARTCriticalWarnings. PowerBack- upFailed mapping . . . . .	186
121	NVMeControllerProperties.NVMeSMARTCriticalWarnings.MediaInReadOnly mapping . . . . .	187
122	NVMeControllerProperties.NVMeSMARTCriticalWarnings. OverallSub- systemDegraded mapping . . . . .	188



123	NVMeControllerProperties.NVMeSMARTCriticalWarnings. SpareCapacityWornOut mapping . . . . .	189
124	PCIeInterface.PCIeType mapping . . . . .	190
125	PCIeInterface.MaxPCIeType mapping . . . . .	191
126	PCIeInterface.LanesInUse mapping . . . . .	192
127	PCIeInterface.LanesInUse mapping . . . . .	193
128	Ports mapping . . . . .	194
129	SKU mapping . . . . .	195
130	SpeedGbps mapping . . . . .	196
131	Status.State mapping . . . . .	197
132	Status.Health mapping . . . . .	199
133	SupportedControllerProtocols mapping . . . . .	200
134	SupportedDeviceProtocols mapping . . . . .	201
135	BlockSizeBytes mapping . . . . .	204
136	Capacity.Data.ConsumedBytes mapping . . . . .	205
137	Capacity.Data.ProvisionedBytes mapping . . . . .	206
138	Capacity.Data.AllocatedBytes mapping . . . . .	207
139	Capacity.Metadata.AllocatedBytes mapping . . . . .	209
140	CapacitySources mapping . . . . .	210
141	Description mapping . . . . .	211
142	DisplayName mapping . . . . .	212
143	Identifiers mapping . . . . .	213
144	Identifiers.DurableName mapping . . . . .	214
145	Identifiers.DurableNameFormat mapping . . . . .	215
146	InitializeMethod mapping . . . . .	216
147	Links.Drives mapping . . . . .	217
148	LogicalUnitNumber mapping . . . . .	218
149	MaxBlockSizeBytes mapping . . . . .	219
150	Name mapping . . . . .	220
151	NVMeNamespaceProperties.NamespaceId mapping . . . . .	222
152	NVMeNamespaceProperties.IsShareable mapping . . . . .	224
153	NVMeNamespaceProperties.NamespaceFeatures. SupportsThinProvisioning mapping . . . . .	225
154	NVMeNamespaceProperties.NamespaceFeatures. SupportsDeallocatedOrUnwrittenLbError mapping . . . . .	227
155	NVMeNamespaceProperties.NamespaceFeatures.SupportsNGUIDReuse mapping . . . . .	229

156	NVMeNamespaceProperties.NamespaceFeatures. SupportsAtomicTransactionSize mapping . . . . .	231
157	NVMeNamespaceProperties.NamespaceFeatures. SupportsIOPerformanceHints mapping . . . . .	234
158	158: NVMeNamespaceProperties.NumberLBAFormats mapping . . . . .	237
159	NVMeNamespaceProperties.FormattedLBASize mapping . . . . .	239
160	NVMeNamespaceProperties.MetadataTransferredAtEndOfDataLBA mapping . . . . .	241
161	NVMeNamespaceProperties.NVMeVersion mapping . . . . .	242
162	OptimumIOSizeBytes mapping . . . . .	243
163	OptimumIOSizeBytes mapping . . . . .	244
164	Status.State mapping . . . . .	245
165	Status.Health mapping . . . . .	247
166	Status.HealthRollup mapping . . . . .	249
167	StorageGroups mapping . . . . .	250
168	WriteCachePolicy mapping . . . . .	251
169	AllocatedPools mapping . . . . .	254
170	Capacity.Data.AllocatedBytes mapping . . . . .	255
171	Capacity.Data.ConsumedBytes mapping . . . . .	256
172	CapacitySources mapping . . . . .	257
173	CapacitySources@odata.count mapping . . . . .	258
174	Description mapping . . . . .	259
175	Links.OwningStorageResource mapping . . . . .	260
176	Name mapping . . . . .	261
177	NVMeProperties.NVMePoolType . . . . .	262
178	NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent mapping . . . . .	263
179	NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed mapping . . . . .	264
180	NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate mapping . . . . .	265
181	NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead mapping . . . . .	266
182	NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten mapping . . . . .	267
183	NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten mapping . . . . .	268

184	NVMeEnduranceGroupProperties.EndGrpLifetime. HostReadCommandCount mapping . . . . .	269
185	NVMeEnduranceGroupProperties.EndGrpLifetime. HostWriteCommandCount mapping . . . . .	270
186	NVMeEnduranceGroupProperties.EndGrpLifetime. MediaAndDataIntegrityErrorCount mapping . . . . .	271
187	NVMeEnduranceGroupProperties.EndGrpLifetime. ErrorInformationLogEntryCount mapping . . . . .	272
188	NVMeSetProperties.SetIdentifier . . . . .	273
189	NVMeSetProperties.OptimalWriteSizeBytes mapping . . . . .	274
190	NVMeSetProperties.EnduranceGroupIdentifier mapping . . . . .	275
191	NVMeSetProperties.Random4kReadTypicalNanoSeconds mapping . . . . .	276
192	Status.Health mapping . . . . .	278
193	Status.State mapping . . . . .	279
194	AllocatedVolumes mapping . . . . .	282
195	Capacity.Data.AllocatedBytes mapping . . . . .	283
196	Capacity.Data.ConsumedBytes mapping . . . . .	284
197	CapacitySources mapping . . . . .	285
198	CapacitySources@odata.count mapping . . . . .	286
199	Description mapping . . . . .	287
200	Links.OwningStorageResource mapping . . . . .	288
201	Name mapping . . . . .	289
202	NVMeProperties.NVMePoolType . . . . .	290
203	NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent mapping . . . . .	291
204	NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed mapping . . . . .	292
205	NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate mapping . . . . .	293
206	NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead mapping . . . . .	294
207	NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten mapping . . . . .	295
208	NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten mapping . . . . .	296
209	NVMeEnduranceGroupProperties.EndGrpLifetime. HostReadCommandCount mapping . . . . .	297

210	NVMeEnduranceGroupProperties.EndGrpLifetime. HostWriteCommandCount mapping . . . . .	298
211	NVMeEnduranceGroupProperties.EndGrpLifetime. MediaAndDataIntegrityErrorCount mapping . . . . .	299
212	NVMeEnduranceGroupProperties.EndGrpLifetime. ErrorInformationLogEntryCount mapping . . . . .	300
213	NVMeSetProperties.SetIdentifier . . . . .	301
214	NVMeSetProperties.OptimalWriteSizeBytes mapping . . . . .	302
215	NVMeSetProperties.EnduranceGroupIdentifier mapping . . . . .	303
216	NVMeSetProperties.Random4kReadTypicalNanoSeconds mapping . . . . .	304
217	NVMeSetProperties.Random4kReadTypicalNanoSeconds mapping . . . . .	306
218	Status.State mapping . . . . .	307
219	Status.Health mapping . . . . .	309
220	Actions.#Drive.Reset mapping . . . . .	312
221	Actions.#Drive.SecureErase mapping . . . . .	314
222	Assembly.BinaryDataURI mapping . . . . .	315
223	BlockSizeBytes mapping . . . . .	317
224	CapableSpeedGpbs mapping . . . . .	317
225	CapacityBytes for single namespace mapping . . . . .	318
226	CapacityBytes for single namespace mapping . . . . .	320
227	Description mapping . . . . .	320
228	EncryptionAbility mapping . . . . .	321
229	EncryptionStatus mapping . . . . .	322
230	FailurePredicted mapping . . . . .	322
231	Identifiers mapping . . . . .	324
232	Identifiers.DurableNameFormat mapping . . . . .	325
233	Identifiers.DurableName mapping . . . . .	326
234	IndicatorLED mapping . . . . .	327
235	Links.Volume mapping . . . . .	327
236	Links.Volumes@odata.count mapping . . . . .	328
237	Location mapping . . . . .	329
238	LocationIndicatorActive mapping . . . . .	329
239	Manufacturer mapping . . . . .	330
240	MediaType mapping . . . . .	331
241	Model mapping . . . . .	332
242	Multipath mapping . . . . .	332
243	Name mapping . . . . .	333
244	NegotiatedSpeedGbps mapping . . . . .	334

---

245	PhysicalLocation.Info mapping . . . . .	335
246	PhysicalLocation.InfoFormat mapping . . . . .	335
247	PhysicalLocation.PartLocation mapping . . . . .	336
248	PredictedMediaLifetimeLeftPercent mapping . . . . .	337
249	Protocol mapping . . . . .	337
250	Revision mapping . . . . .	338
251	RotationSpeedRPM mapping . . . . .	339
252	SKU mapping . . . . .	339
253	SerialNumber mapping . . . . .	340
254	Status.State mapping . . . . .	341
255	Status.Health mapping . . . . .	342
256	StatusIndicator mapping . . . . .	343
257	WriteCacheEnabled mapping . . . . .	344
258	Additional parameters . . . . .	346

## List of Figures

1	Subsystem model . . . . .	28
2	NVMe-oF Subsystem Model . . . . .	29
3	Simple SSD instance diagram . . . . .	30
4	Simple SSD mockup example . . . . .	31
5	Complex SSD Model . . . . .	32
6	Complex SSD Model . . . . .	33
7	Simple IP-attached SSD . . . . .	34
8	Simple IP-attached SSD mockup . . . . .	35
9	JBOF configuration controller object . . . . .	36
10	Full JBOF system . . . . .	36
11	JBOF system instance . . . . .	37
12	Full EBOF system . . . . .	38
13	EBOF system instance . . . . .	39
14	Opaque array example . . . . .	40
15	Sample opaque system instance . . . . .	41
16	NVMe-OF subsystem example . . . . .	42
17	NVMe-OF system instance . . . . .	43
18	NVMeDomain example . . . . .	44

## USAGE

Copyright (c) 2020 - 2022 SNIA. All rights reserved. All other trademarks or registered trademarks are the property of their respective owners.

The SNIA hereby grants permission for individuals to use this document for personal use only, and for corporations and other business entities to use this document for internal use only (including internal copying, distribution, and display) provided that:

1. Any text, diagram, chart, table or definition reproduced must be reproduced in its entirety with no alteration, and,
2. Any document, printed or electronic, in which material from this document (or any portion hereof) is reproduced must acknowledge the SNIA copyright on that material, and must credit the SNIA for granting permission for its reuse.

Other than as explicitly provided above, you may not make any commercial use of this document, or any portion thereof, or distribute this document to third parties. All rights not explicitly granted are expressly reserved to SNIA.

Permission to use this document for purposes other than those enumerated above may be requested by emailing [tcmd@snia.org](mailto:tcmd@snia.org). Please include the identity of the requesting individual and/or company and a brief description of the purpose, nature, and scope of the requested use.

All code fragments, scripts, data tables, and sample code in this SNIA document are made available under the following license:

BSD 3-Clause Software License

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of The Storage Networking Industry Association (SNIA) nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## **DISCLAIMER**

The information contained in this publication is subject to change without notice. The SNIA makes no warranty of any kind with regard to this publication, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The SNIA shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use.

Suggestions for revisions should be directed to <http://www.snia.org/feedback/>.

## **Current Revision**

SNIA is actively engaged in expanding and refining the Swordfish documentation. The most current revision can be found on the SNIA web site at [https://www.snia.org/tech\\_activities/standards/curr\\_standards/swordfish](https://www.snia.org/tech_activities/standards/curr_standards/swordfish).

## **Contact SNIA**

Current SNIA practice is to make updates and other information available through their web site at <http://www.snia.org>.

## **FEEDBACK AND INTERPRETATIONS**

Requests for interpretation, suggestions for improvement and addenda, or defect reports are welcome. They should be sent via the SNIA Feedback Portal at



<http://www.snia.org/feedback/> or by mail to the Storage Networking Industry Association, 4360 ArrowsWest Drive, Colorado Springs, Colorado 80907, U.S.A.

## **INTENDED AUDIENCE**

This document is intended for use by individuals and companies engaged in storage management.

## **VERSIONING POLICY**

This document is versioned material. Versioned material shall have a three-level revision identifier, comprised of a version number ‘v’, a release number ‘r’ and an errata number ‘e’. Future publications of this document are subject to specific constraints on the scope of change that is permissible from one revision to the next and the degree of interoperability and backward compatibility that should be assumed between products designed to this standard. This versioning policy applies to all SNIA Swordfish versioned materials.

**Version Number:** Versioned material having version number ‘v’ shall be backwards compatible with all of revisions of that material that have the same version number ‘v’. There is no assurance of interoperability or backward compatibility between revisions of a versioned material with different version numbers.

**Release Number:** Versioned material with a version number ‘v’ and release number ‘r’ shall be backwards compatible with previous revisions of the material with the same version number, and a lower release number. A minor revision represents a technical change to existing content or an adjustment to the scope of the versioned material. Each minor revision causes the release number to be increased by one.

**Errata Number:** Versioned material having version number ‘v’, a release number ‘r’, and an errata number ‘e’ should be backwards compatible with previous revisions of the material with the same version number and release number (“errata versions”). An errata revision of versioned material is limited to minor corrections or clarifications of existing versioned material. An errata revision may be backwards incompatible, if the incompatibility is necessary for correct operation of implementations of the versioned material.

## **Revision History**

Revisions to this document are summarized in Table 1.

**Table 1:** Revision History

Date	Rev	Notes
18 August 2020	1.2.1	Initial Release
31 October 2020	1.2.1c	Released as SNIA Approved Publication
2 March 2021	1.2.2	Added detailed mapping information to match information in NVMe drive profiles for many new referenced properties, and included guidance for mandatory/recommended implementation as reflected in the profiles.  Added sections for firmware update, with details for NVMe Drive implementation requirements.  Added cross-references to User's Guide NVMe-specific use cases.  Errata fixes – correct diagram, correct table headers.
30 August 2021	1.2.3	Update Mapping Guide with new mapping guidance, corresponding to the Swordfish NVMe Front End profile.
5 December 2021	1.2.3	Release as SNIA Approved Publication
12 April 2022	1.2.4	Release as SNIA Working Draft. Errata fixes throughout. Added section for EBOF configuration, and additions to appendix A to correspond to EBOF, JBOF, and NVMe-oF configurations.

## About SNIA

The Storage Networking Industry Association (SNIA) is a non-profit organization made up of member companies spanning information technology. A globally recognized and trusted authority, SNIA's mission is to lead the storage industry in developing and promoting vendor-neutral architectures, standards and educational services that

facilitate the efficient management, movement and security of information.

## Acknowledgements

The SNIA Scalable Storage Management Technical Work Group, which developed and reviewed this work in progress, would like to recognize the significant contributions made by the members listed in 2.

**Table 2:** Contributors

Member	Representatives (* – prior employer)
Broadcom Inc.	Richelle Ahlvers*
Cisco Systems, Inc.	Krishnakumar Gowravaram
Dell Inc.	David Black Jim Pendergraft Michael Raineri
Hewlett Packard Enterprise	Curtis Ballard Jeff Hilland Chris Lionetti
Intel Corporation	Richelle Ahlvers Rajalaxmi Angadi Phil Cayton Slawek Putyrski
Kioxia	Mark Carlson
Lenovo	Keith Campbell
NetApp, Inc.	Don Deel Fred Knight
Samsung Corporation	Lu Fan Bill Martin Tom Rainey
VMware, Inc.	Murali Rajagopal

## **1 Abstract**

The Swordfish NVMe Model Overview and Mapping Guide defines the model to manage NVMe and NVMe-oF storage systems with Redfish and Swordfish. It provides the detailed mapping information between the NVMe, NVMe-oF specifications and the Redfish and Swordfish specifications.

## **2 Scope**

### **2.1 Document Goals**

This document describes how both the NVMe Subsystem model and the NVMe-oF fabric system model should be mapped consistently to Redfish and Swordfish constructs for implementations to be managed within Redfish and Swordfish management environments.

This model and mapping information does not describe or assert any specific implementation recommendation technologies.

This document also provides the mapping information for properties recommended to be implemented in Redfish/Swordfish for NVMe and NVMe-oF devices and the corresponding reference information from the NVMe and NVMe-oF specifications.

### **2.2 Audience Assumptions**

This document assumes that the reader of this document is familiar with NVMe and NVMe-oF technologies and concepts. It also assumes the reader has knowledge of the Redfish and Swordfish concepts.

## 3 Normative References

### 3.1 Overview

The documents listed in Table 3 are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

### 3.2 Approved references

**Table 3:** Approved normative references

Tag	Title (Version)	Author	URL
ISO-8601	Data elements and interchange formats – Information interchange – Representation of dates and times – Part 1: Basic rules	ISO / IEC	<a href="http://www.iso.org/iso/home/store/catalogue_ics/catalogue_detail_ics.htm?csnumber=70907">http://www.iso.org/iso/home/store/catalogue_ics/catalogue_detail_ics.htm?csnumber=70907</a>

Tag	Title (Version)	Author	URL
ISO-Direct	ISO/IEC Directives, Part 2 Principles and rules for the structure and drafting of ISO and IEC documents (Eighth Edition, 2018)	ISO / IEC	<a href="https://www.iso.org/sites/directives/current/part2/index.xhtml">https://www.iso.org/sites/directives/current/part2/index.xhtml</a>
Redfish	Redfish Scalable Platforms Management API Specification (v1.11.0)	DMTF	<a href="http://www.dmtf.org/sites/default/files/standards/documents/DSP0266_1.4.0.pdf">http://www.dmtf.org/sites/default/files/standards/documents/DSP0266_1.4.0.pdf</a>
Swordfish	Swordfish Scalable Storage Management API Specification (v1.2.1)	SNIA	<a href="https://www.snia.org/tech_activities/standards/current_standards/swordfish">https://www.snia.org/tech_activities/standards/current_standards/swordfish</a>
NVMe	NVMe Spec v1.4a	NVM Express	<a href="https://nvmexpress.org/wp-content/uploads/NVM-Express-1_4a-2020.03.09-Ratified.pdf">https://nvmexpress.org/wp-content/uploads/NVM-Express-1_4a-2020.03.09-Ratified.pdf</a>
NVMe-oF	NVMe-oF Spec v1.1	NVM Express	<a href="https://nvmexpress.org/wp-content/uploads/NVMe-over-Fabrics-1.1-2019.10.22-Ratified.pdf">https://nvmexpress.org/wp-content/uploads/NVMe-over-Fabrics-1.1-2019.10.22-Ratified.pdf</a>

### **3.3 References under development**

None defined in this document.

### **3.4 Other references**

None defined in this document.



## 4 NVMe Model Overview

### 4.1 Introduction

In order to manage NVMe and NVMe-oF devices and systems in a large scale environment, a higher level management ecosystem is needed. The Redfish/Swordfish management specifications are designed to manage multi-system environments, including multiple types of fabrics, covering not only multiple technologies, but also inclusive of system management, storage management and fabric management, making it the ideal ecosystem in which to add not only the integration of NVMe devices for system and storage management, but NVMe-oF for fabric management.

This document describes how both the NVMe Subsystem model and the NVMe-oF fabric system model should be mapped consistently to Redfish and Swordfish constructs for implementations to be managed within Redfish and Swordfish management environments. This model and mapping information does not describe or assert any specific implementation recommendation technologies.

Similar implementations will have similar Redfish and Swordfish constructs. Mockups are used to show static examples of sample representations. Requirements and recommendations for implementations are provided separately through the Swordfish NVMe and NVMe-oF profiles. The profiles use the Redfish interoperability profile schema to specify the required, recommended and optional properties and schema for specific configurations and functionality that correspond to classes of implementations.

#### 4.1.1 Fundamental Model Design Assertions

- There shall be a unified model across all types of NVMe devices.
- There shall not be a different model for “drives” vs other types of NVMe devices
- The model will cover an appropriate level of abstraction for all types of NVMe devices based on modeling and mockups reflected in the documented permutations (e.g., from simple drives through to complex fabric virtual systems)
  - Simple NVMe drives; complex NVMe drives; JBOFs/EBOFs; Arrays/RBOFs
- The logical model for NVMe-oF shall leverage the NVMe Subsystem model
- Logical subsystems, controllers, and namespaces are the same objects with the same relationships as in the NVMe Subsystem Model. Unneeded objects are not instantiated (e.g., Endurance Groups, sets)

- The NVMe native model should map to the existing Redfish and Swordfish constructs when and where possible
  - Mapping future NVMe / NVMe-oF functionality should follow this principle when and where possible (e.g., firmware update mapping to the RF update service)

## 4.2 Overall NVMe Subsystem Model

Key Tenets:

- Model reflects a unified view of all NVMe device types.
- Devices will instantiate an appropriate subset of the model
- The model diagrams do not reflect all available schema elements.
- Model leverages and coarsely maps to existing (Redfish and) Swordfish storage model

### 4.2.1 Major NVM Objects Mapped to RF/SF

**4.2.1.1 NVM Subsystem** An NVM subsystem includes one or more controllers, zero or more namespaces, and one or more ports. Examples of NVM subsystems include Enterprise and Client systems that utilize PCI Express based solid state drives and/or fabric connectivity.

**4.2.1.2 NVM Controller (IO, Admin and Discovery)** The interface between a host and an NVM subsystem

Admin controller: controller that exposes capabilities that allow a host to manage an NVM subsystem

Discovery: controller that exposes capabilities that allow a host to retrieve a Discovery Log Page

I/O: controller that implements I/O queues and is intended to be used to access a non-volatile memory storage medium

**4.2.1.3 Namespace** A quantity of non-volatile memory that may be formatted into logical blocks. When formatted, a namespace of size n is a collection of logical blocks with logical block addresses from 0 to (n-1).

**4.2.1.4 Endurance Group** A portion of NVM in the NVM subsystem whose endurance is managed as a group

**4.2.1.5 NVM Set** An NVM Set is a collection of NVM that is separate (logically and potentially physically) from NVM in other NVM Sets.

**4.2.1.6 NVM Domain** A domain is the smallest indivisible unit that shares state (e.g., power state, capacity information). Domain members can be NVM controllers, endurance groups, sets or namespaces.

## 4.2.2 Unmapped objects


There are a number of objects that are required for the proper integration of NVMe support within Redfish and Swordfish, but which are not supported by an entity that can be mapped directly from the various NVM Specifications. Information about these related but un-mapped objects are defined elsewhere in the documentation provided with each Swordfish release.

They are summarized in Appendix A.

## 4.2.3 NVM Subsystem Model

The following diagram reflects the high level mapping of the key NVM objects into Redfish / Swordfish schema objects. These largely follow existing relationships used by the Swordfish storage specification for non-NVMe implementations as well, which provides a great deal of consistency for storage clients, as well as for implementations such as NVMe arrays that may be delivering solutions that combine NVMe and other technologies.

This model covers a wide range of instantiations ranging from individual SSDs, to multi-rack storage systems. All of these can be represented by this NVM Subsystem model, shown in Figure 1.

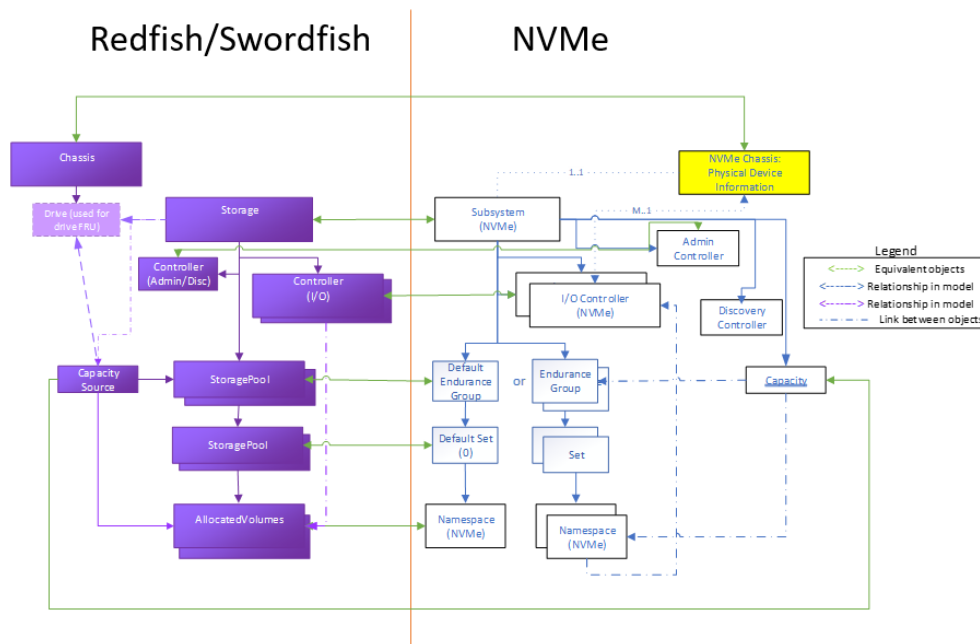


**Figure 1:** Subsystem model

#### 4.2.4 NVMe-oF Subsystem Model

Figure 2 shows the high level mapping of the key NVMe-oF objects to Redfish / Swordfish schema objects. Following the tenets described in the model overview section, these extend the mapping used in the NVM Subsystem for the logical versions of the objects.

This model also includes the use of the Redfish Fabric model to cover the connectivity aspects of the fabric.

The grey shaded portion of this diagram reflects the logical / exported portion of the NVMe-oF environment represented in Redfish / Swordfish.

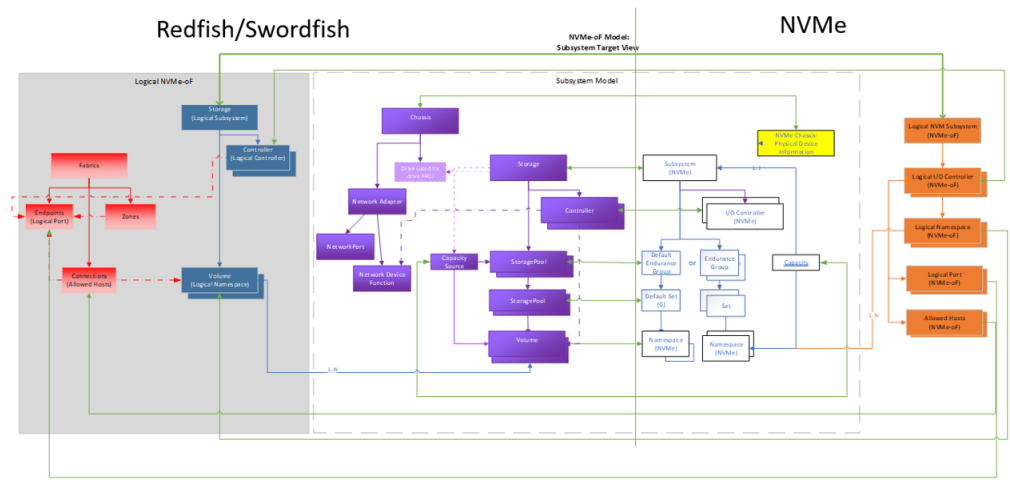

**Figure 2:** NVMe-oF Subsystem Model

## 5 Example Instances

### 5.1 Introduction


This section of the document provides a series of example usages of the model that represent common instantiations of NVMe devices, and how those devices may use the various NVMe, and correspondingly, Redfish and Swordfish objects and schema. This section will not provide comprehensive representations of all potential device types; rather, a representation of several common device types, in order to provide an illustration of the application of the model for those that are unfamiliar with either the NVMe or Redfish / Swordfish ecosystems.

Further, the following sections describe the examples and do not attempt to cover all potential permutations for alternate representations of each device class or possible implementations.

### 5.2 Simple SSD

#### 5.2.1 Overview

Figure 3 shows a sample representation of a simple NVMe SSD, with a PCIe interface. It is implemented with no endurance group or NVM set functionality; it has only a single namespace capability, and a single IO controller.

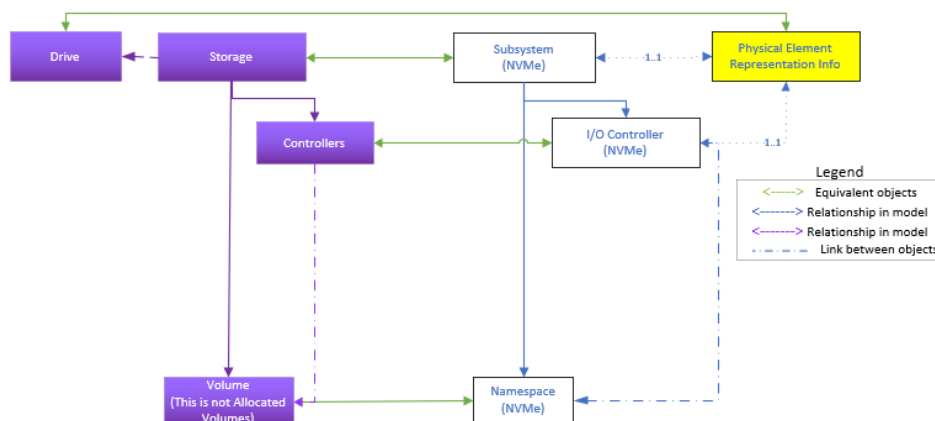

**Figure 3:** Simple SSD instance diagram

### 5.2.2 Explanation of Object use

Simple SSDs are SSDs that do not use Endurance Groups or sets. Correspondingly, they only use Storage, Controllers, Volumes (Namespaces), and the Drive schema to represent the fundamental components.


Many SSD implementations support exactly one namespace. These are described by this model, and the mockups reflect this configuration.

This model can also support extensions to cover dual-ported configurations, as well as support for multiple IO controllers per port.

### 5.2.3 Redfish / Swordfish Object Representation

Figure 4 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

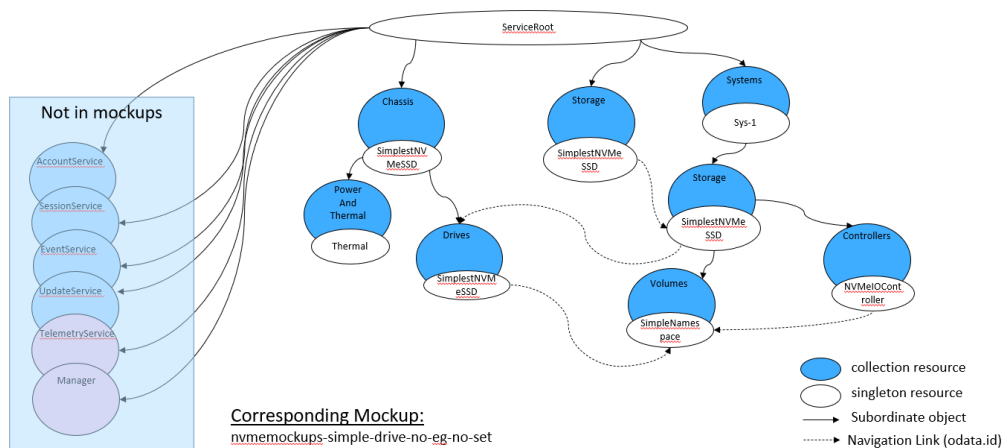

**Figure 4:** Simple SSD mockup example

### 5.2.4 Mockup

A corresponding mockup for this configuration can be found at <http://swordfishmockups.com/simple-ssd-mockups>.






### 5.3.3 Redfish / Swordfish Object Representation

Figure 6 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

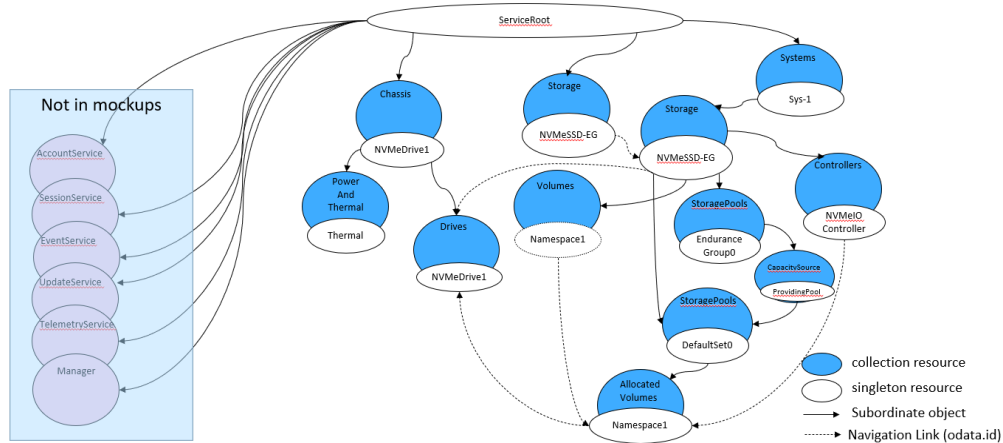


**Figure 6:** Complex SSD Model

**5.3.3.1 Mockup** A corresponding mockup for this configuration can be found at <http://swordfishmockups.com/simple-ssd-eg-set-mockups>.

## 5.4 Simple SSD with IP (NVMe-oF) Attach

### 5.4.1 Overview

This example reflects an IP-attached drive configuration, with a single ethernet port configured, as illustrated in Figure 7. It includes a drive configured with a default endurance group and NVM Set, and is instantiated in the Storage Collection off the Service Root. The network configuration is modeled in the Chassis.

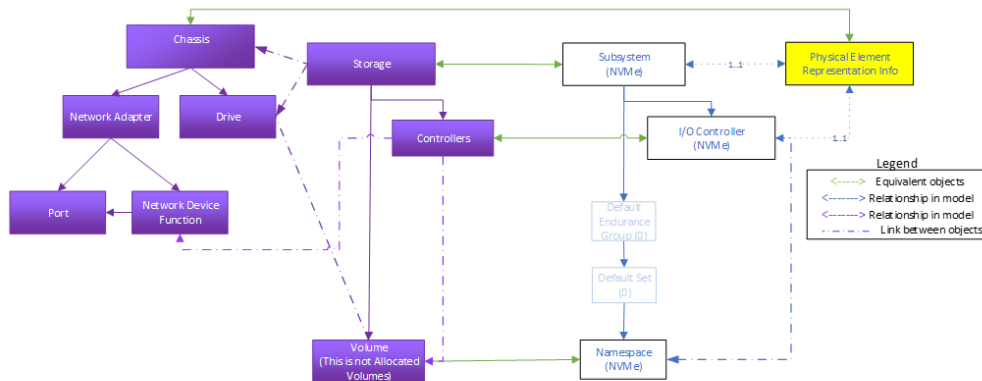

**Figure 7:** Simple IP-attached SSD

#### 5.4.2 Explanation of Object use

Simple SSDs with IP attach are also SSDs that do not use Endurance Groups or sets, but that have IP-based network interfaces. Correspondingly, they only use Storage, Controllers, Volumes (Namespaces), and the Drive schema to represent the fundamental components. In addition, they use the Redfish Network Adapter, Port and Network Device Function to model the configuration of the IP interface port(s).


As with the Simple SSD configuration, Many SSD with IP-attach implementations support exactly one namespace. These are described by this model, and the mockups reflect this configuration.

This model can also support extensions to cover multi-ported configurations, as well as support for multiple IO controllers per port.

#### 5.4.3 Redfish / Swordfish Object Representation

Figure 8 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

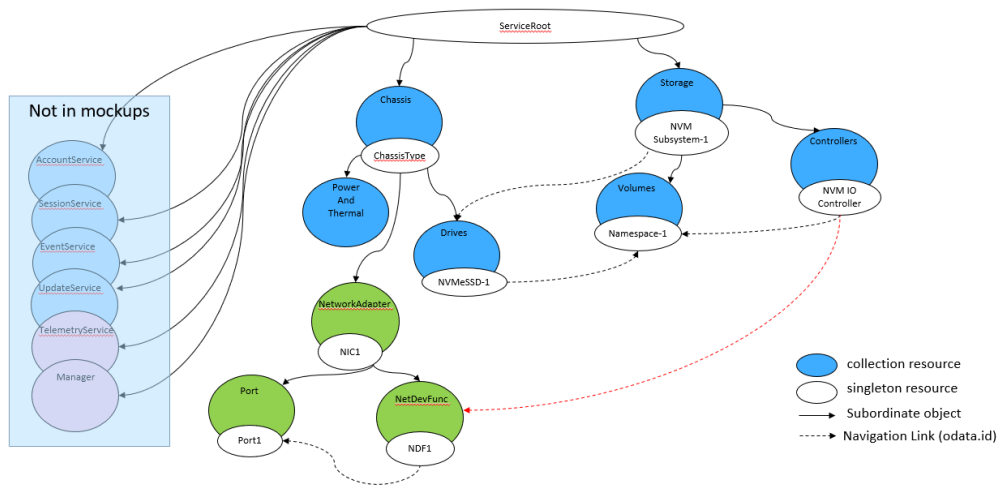

**Figure 8:** Simple IP-attached SSD mockup

#### 5.4.4 Mockup


A corresponding mockup for this configuration can be found at <http://swordfishmockups.com/ethernet-attach-drive-mockups>.

### 5.5 JBOF

#### 5.5.1 Overview


This example covers a representation of a JBOF (“just a bunch of flash”) enclosure and contained drives. This mockup reflects a PCIe front-end attach configuration with a set of drives.

Figure 9 shows only the controller object representation for this JBOF configuration. This includes the admin controller function for enclosure management.

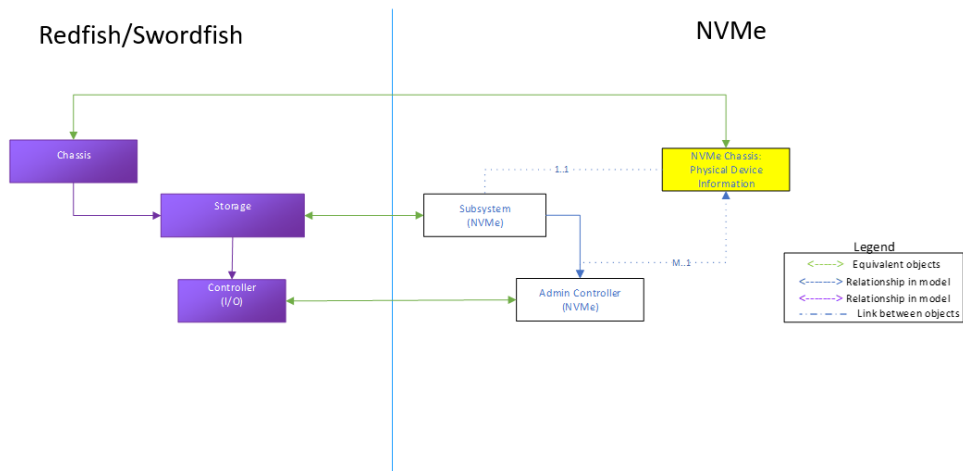

**Figure 9:** JBOF configuration controller object

Figure 10 shows the combined object representations for the JBOF system, with both the JBOF controller and NVMe drives (using the Simple SSD style drives) represented in the system. Note that the full mockup represented has 7 drives, while this diagram only represents two for the sake of visual clarity.

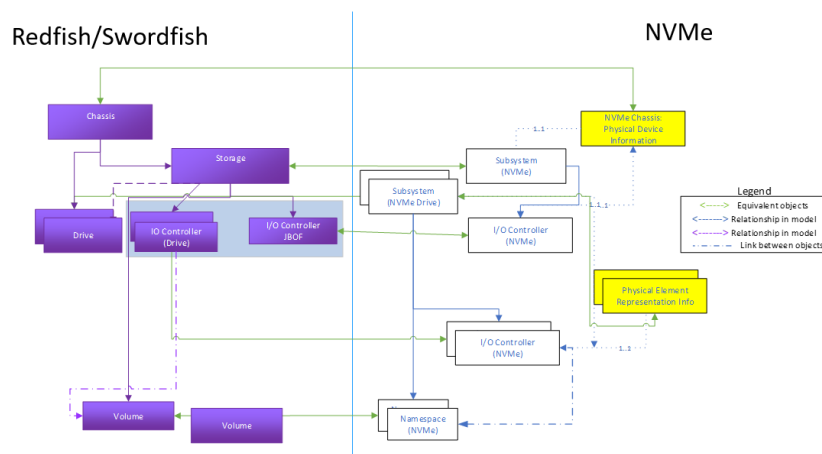

**Figure 10:** Full JBOF system

### 5.5.2 Explanation of Object use

This type of JBOF system uses the Chassis, Storage and Controller objects to reflect physical component modeling, Subsystem and Admin Controller functionality.


The Chassis model and Admin controller represent NVM’s SES (SCSI enclosure services)

usage.

### 5.5.3 Redfish / Swordfish Object Representation

Figure 11 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

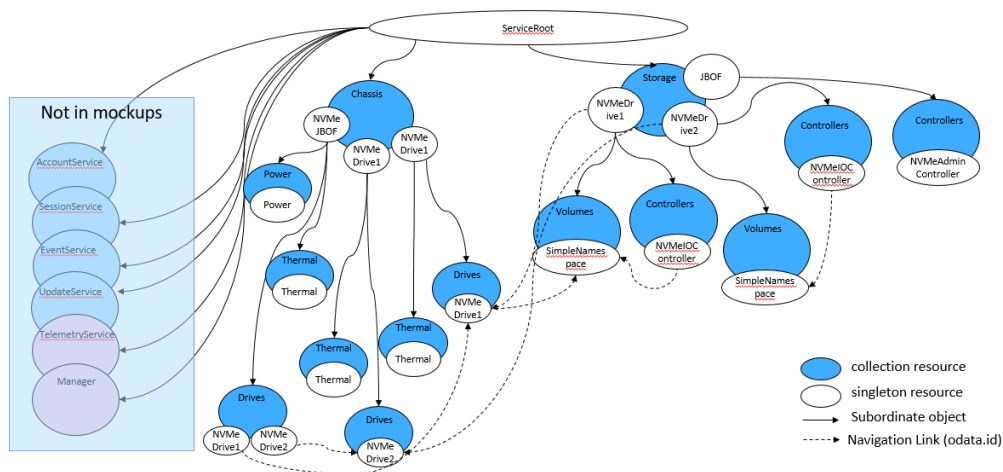

**Figure 11:** JBOF system instance

### 5.5.4 Mockup

A corresponding mockup for this configuration can be found at <http://swordfishmockups.com/nvme-jbof-mockups>


## 5.6 EBOF

### 5.6.1 Overview

This example covers a representation of a EBOF (“Ethernet bunch of flash”) enclosure and contained drives. This mockup reflects a Ethernet front-end attach enclosure configuration containing a set of Ethernet-attach drives.

Figure 12 shows the combined object representations for the EBOF system, with both the EBOF controller and Ethernet-attach drives (using the Simple SSD with IP drives)

represented in the system. Note that the full mockup represented has multiple drives, while this diagram only represents one for the sake of visual clarity.

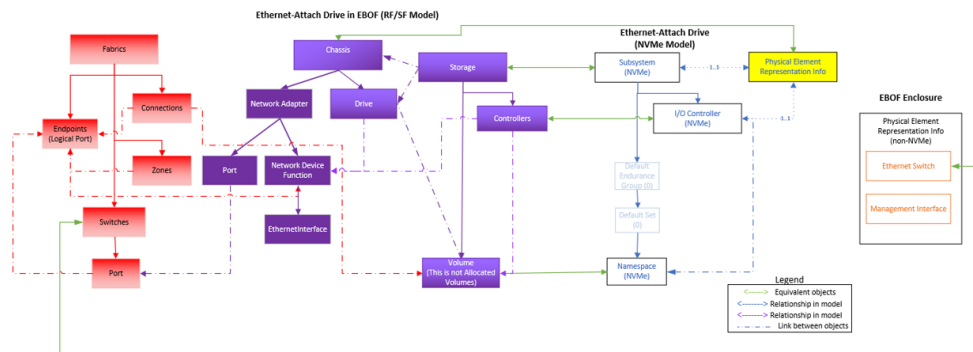

**Figure 12:** Full EBOF system

### 5.6.2 Explanation of Object use


This type of EBOF system uses the Storage and Controller objects to reflect component modeling of the NVMe Subsystem and controller functionality.

Connectivity is represented through the Chassis model's NetworkAdapter, NetworkPort, NetworkDeviceFunction and EthernetInterface objects, the Fabric model's Switch and Port objects, as well as the Manager model's EthernetInterface and ManagerProtocol. In-band management capability is also modeled via Admin controllers, consistent with other NVMe devices.

### 5.6.3 Redfish / Swordfish Object Representation

Figure 13 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

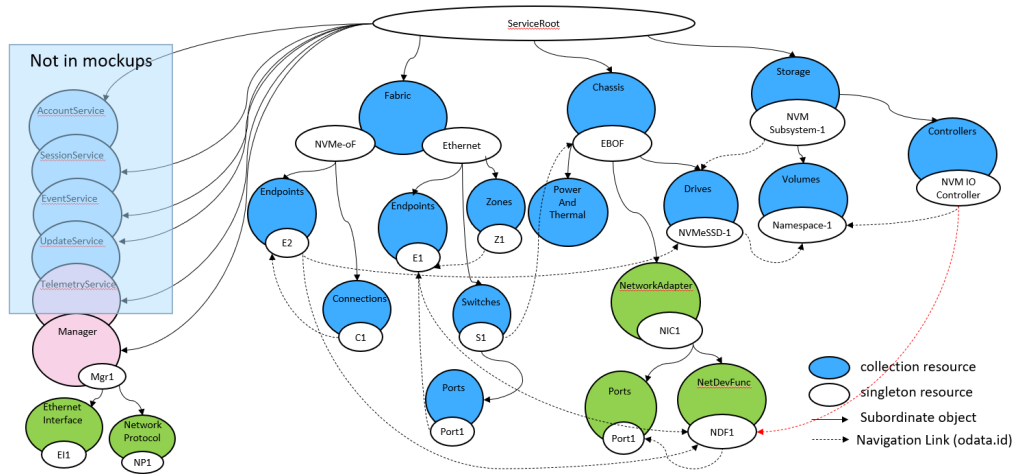

**Figure 13:** EBOF system instance

### 5.6.4 Mockup


A corresponding mockup for this configuration can be found at <http://swordfishmockups.com/nvme-ebf-mockups>

## 5.7 Opaque Array / NVMe Front End Device

### 5.7.1 Overview

The “opaque” array reflects a system with an NVMe front end, but the internal implementation is vendor specific, and not necessarily presented by the vendor (aka “opaque”). Figure 14 shows a system that presents an NVMe front-end but also exposes a SATA drive backend. This could be done to support both FRU management and volume/namespace creation.

Requirements for the NVMe portion of this type of configuration is documented in the SwordfishNVMeFrontEnd profile; opaque arrays should implement both traditional Swordfish block profiles, in addition to the SwordfishNVMeFrontEnd profile.

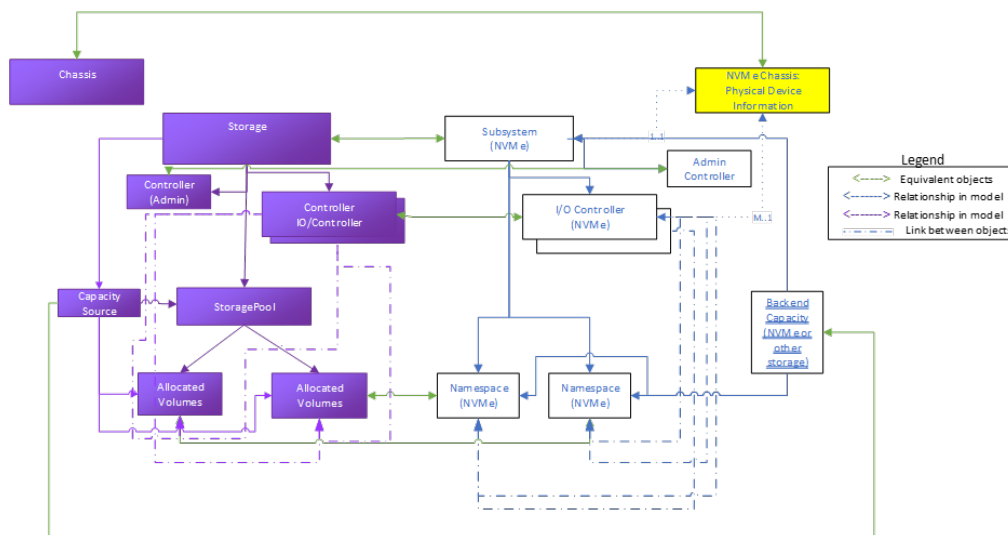

**Figure 14:** Opaque array example

### 5.7.2 Explanation of Object use

The opaque array example presents NVMe specific information in Redfish/Swordfish objects, using the Storage, Controller, and Volume objects.


In addition, device management information is presented through StoragePool and Drive objects, providing internal, non-NVMe implementation specific information to the user, for configuration, diagnosis and other storage management functions. (This set of objects is subject to the standard Swordfish specification and profiles.)



### 5.7.3 Redfish / Swordfish Object Representation

Figure 15 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

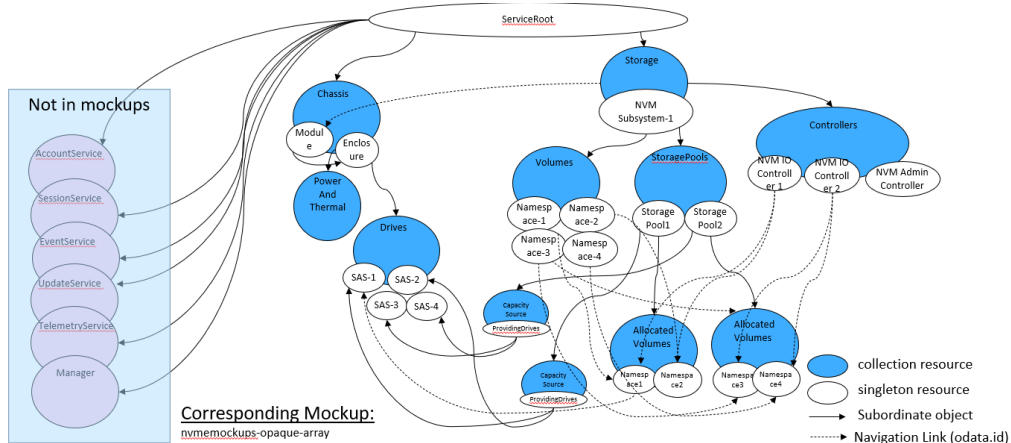

**Figure 15:** Sample opaque system instance

### 5.7.4 Mockup


A corresponding mockup for this configuration can be found at <http://swordfishmockups.com/nvme-opaque-array-mockups>.

## 5.8 Subsystem (Fabric) Model - NVMe-oF: Fabric Attach Subsystem

### 5.8.1 Overview

Figure 16 shows a logical/exported NVMe-oF subsystem presenting one logical subsystem, one I/O controller, one namespace, one port and representing one allowed host, using the Redfish Fabric model. The fabric model uses the Connection schema to characterize the allowed host information, and Endpoints and Zones to show the network connectivity from the device's perspective.

This example also includes NVMeDomains. NVMeDomains contain a collection of domain members; these can be NVM controllers, endurance groups, NVM sets, or namespaces.

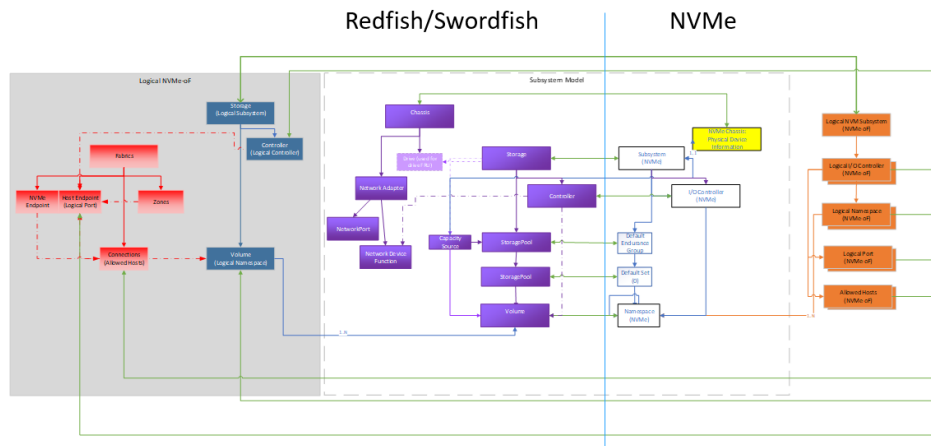

**Figure 16:** NVMe-OF subsystem example

### 5.8.2 Explanation of Object use


The fabric attach subsystem example shows the representation of logical, or exported, subsystems, controllers, and namespaces using the Storage, Controller and Volume objects respectively.

It also uses portions of the Redfish fabric model to represent the host attachment information - allowed hosts and logical port - using the Connections and Endpoints objects respectively.

### 5.8.3 Redfish / Swordfish Object Representation

Figure 17 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

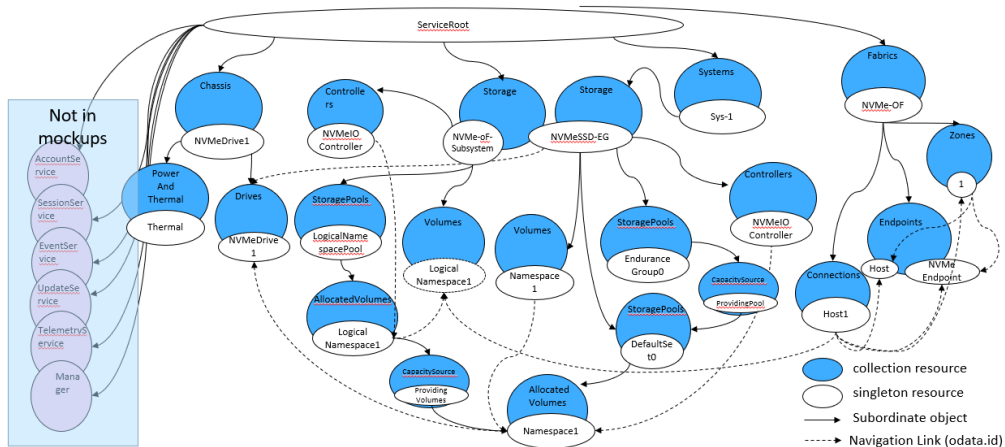

**Figure 17:** NVMe-oF system instance

## 5.8.4 Mockup

There are multiple mockups that show the representation for this configuration:


- A mockup for this configuration using an Ethernet attach front-end can be found at <http://swordfishmockups.com/nvmeof-mockups>.
- A mockup for this configuration using an RDMA attach front-end can be found at <http://swordfishmockups.com/nvmeof-RDMA-mockups>.

## 5.9 NVMe Domains

### 5.9.1 Overview

This example describes NVMeDomains. NVMeDomains contain a collection of domain members; these can be NVM controllers, endurance groups, NVM sets, namespaces, and ports, as illustrated in Figure 18.

Domains are used to subdivide an NVM Subsystem. For example, if there are multiple power sources, the domain is used to represent the scope of each power source.

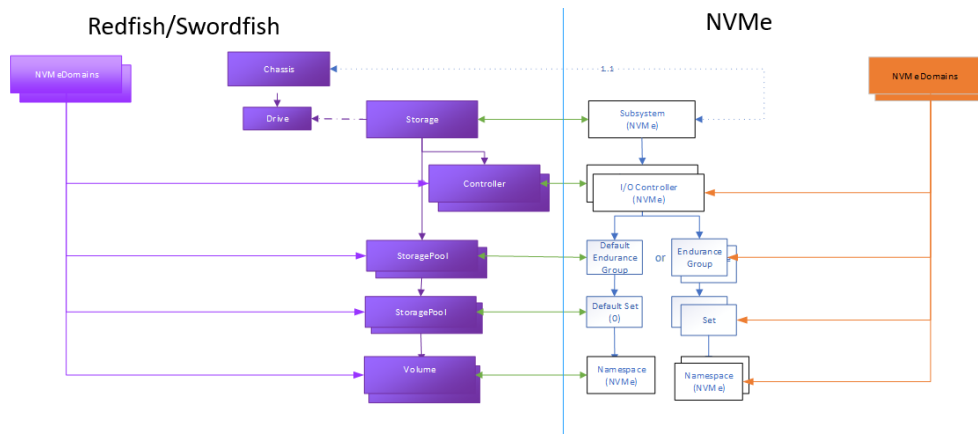

**Figure 18:** NVMeDomain example

### 5.9.2 Explanation of Object use

The domain object contains two primary elements: the domain members collection, which contains pointers to the relevant controllers, groups, sets, namespaces, and ports that reflect the appropriate subdivision for the purpose of the domain.

The other primary element includes a set of capacity information properties about this set of domain members.

### 5.9.3 Mockup

A corresponding mockup for this configuration can be found at <http://swordfishmockups.com/nvmeof-mockups>.

## 6 Property Mapping

### 6.1 Introduction

The property mapping provided defines the preferred translation between the Redfish/Swordfish schema objects and properties, and the corresponding NVMe and NVMe-oF specification properties. The information is ordered within the Redfish/Swordfish objects; each cross-referenced property within the Redfish/Swordfish structure therefore contains a detailed reference to its mapped property in the NVMe ecosystem.

Each section also includes a sample Redfish/Swordfish mockup presenting an example usage for that object.

### 6.2 Property Mapping Template

Table 4 provides the template and an example for the property mapping provided in the following sections of this document.

For each property (whether a reference, collection, complex type or actual property), there is a comparison between the property in Redfish/Swordfish to the corresponding property in either the NVMe or NVMe-oF specification. The RF/SF property is provided within its schema context; the NVMe/NVMe-oF specification reference is provided within the table, showing both which specification, as well as the section and, if appropriate, the figure in which the property is specified.

Similarly, the type of each property is correspondingly specified. The RF/SF type is specified, and the NVM Spec property type is shown, as well as, where appropriate, any additional identifying information, such as byte offset and data structure.

The Mandatory field is used to specify whether properties are Mandatory or Optional on the NVMe specification side, and in the rare instance where properties are Mandatory in the Redfish/Swordfish schema. (Recommended / required properties for specific implementation types in Redfish/Swordfish will be done separately, through the use of profiles.)

The Notes field can / will be used to include any relevant information about either the purpose of the property, additional context, or other useful information to implementers, such as inter-relationships with other properties.

**Table 4:** Property Mapping Template and Example

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<b>Redfish / Swordfish Schema Property:</b> RecommendedArbitrationBurstSize	<b>NVM Spec Property / Field:</b> RecommendedArbitra- SizeBurst(RAB) <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2, Figure 249
Type	<b>Redfish / Swordfish Schema Type:</b> String	<b>NVM Spec Property Type:</b> Power of 2: $2^n$ <b>Additional</b> <b>NVM Spec Identifying</b> <b>Information:</b> ByteOffset: 72, IdentifyController data structure
Description	The Recommended Arbitration Burst Size indicates the maximum number of commands that the controller may launch at one time from a particular Submission Queue.	This is the recommended Arbitration Burst size. The value is in commands and is reported as a power of two ( $2^n$ ). This is the same units as the Arbitration Burst size.
LongDescription	This property shall contain the Recommended Arbitration Burst Size indicates the maximum number of commands that the controller may launch at one time from a particular Submission Queue. The value is expressed as a power of two (e.g., 000b indicates one, 011b indicates eight). A value of 111b indicates no limit.	
Mandatory		Mandatory
Notes		

## 6.3 NVM subsystem

The Redfish/Swordfish Storage schema is used to represent an NVM Subsystem.

### 6.3.1 Mockup

The following mockup shows a sample representation of the Storage schema used to represent an NVM Subsystem.

```
{
  "@Redfish.Copyright": "Copyright 2014-2020 SNIA. All rights reserved.",
  "@odata.id": "/redfish/v1/Storage/NVMe-oF-Subsystem",
  "@odata.type": "#Storage.v1_9_0.Storage",
  "Id": "1",
  "Name": "NVMe-oF Logical NVM Fabric System",
  "Description": "Mockup of NVMe-oF Logical NVM Fabric System with 1 Logical
  ↪ Subsystem, 1 Logical I/O Controller and 1 Logical port and 1 allowed
  ↪ host.",
  "Status": {
    "State": "Enabled",
    "Health": "OK",
    "HealthRollup": "OK"
  },
  "Identifiers": [{
    "DurableNameFormat": "NQN",
    "DurableName":
    ↪ "nqn.2014-08.org.nvmeexpress:uuid:6c5fe566-10e6-4fb6-aad4-8b4159f50245"
  }],
  "Controllers": {
    "@odata.id": "/redfish/v1/Storage/NVMe-oF-Subsystem/Controllers"
  },
  "Volumes": {
    "@odata.id":
    ↪ "/redfish/v1/Storage/NVMe-oF-Subsystem/Volumes/LogicalNamespace1"
  }
}
```

### 6.3.2 Property Mapping

**6.3.2.1 Actions.#StorageController.SetEncryptionKey** The mapping for `Actions.#StorageController.SetEncryptionKey` is summarized in Table 5.

**Table 5:** `Actions.#StorageController.SetEncryptionKey` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Actions.#StorageController.SetEncryptionKey</code>	N/A
Type	Action (Special form of POST)	
Description	The available OEM-specific actions for this resource.	
LongDescription	This property shall contain the available OEM-specific actions for this resource.	
Mandatory	Do not implement (for NVMe Drives, or for devices with an NVMe front end interface, e.g., opaque arrays).	
Notes		N/A for NVMe (drives or for devices with an NVMe front end interface). Drives will generate their own key for CryptoErase, this requires passing a new key.



**6.3.2.2 Controllers** The mapping for `Controllers` is summarized in Table 6.

**Table 6:** Controllers mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Controllers	Controllers
Type	StorageControllerCollection.	Controller list.
Description	The set of controllers instantiated by this storage subsystem.	A list of controller identifiers in the NVM subsystem that may or may not be attached to namespace(s)
LongDescription	This property shall contain a link to a Resource of type <code>StorageControllerCollection</code> that contains the set of storage controllers allocated to this instance of an storage subsystem.	A Controller List (refer to NVMe Base Specification section 4.11) of up to 2,047 controller identifiers is returned containing a controller identifier greater than or equal to the value specified in the Controller Identifier (CDW10.CNTID) field. The list contains controller identifiers in the NVM subsystem that may or may not be attached to namespace(s).
Mandatory	Yes. Implement (for NVMe Drives, or for devices with an NVMe front end interface, e.g., opaque arrays).	No (see note)

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	This is a collection of StorageControllers. Refer to the StorageController schema for details of the instance information. These are used to provide information on NVM IO, Admin and Discovery controllers.	This property is only mandatory for controllers that support the Namespace Management capability - reference NVMe Base Specification section 5.15.2.9 Controller list (CNS 13h)

**6.3.2.3 Description** The mapping for `Description` is summarized in Table 7.

**Table 7:** Description mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Type	String	N/A
Description	The description of this resource.	N/A
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specification-described requirements.	N/A
Mandatory	Yes	N/A
Notes	In Redfish, <code>Description</code> is a read-only field.	Return the common description: “An NVM Express Subsystem is an NVMe device that contains one or more NVM Express controllers and may contain one or more namespaces.”

**6.3.2.4 Drives** The mapping for `Drives` is summarized in Table 8.

**Table 8:** Drives mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Drives	<b>NVM Spec Property / Field: NVM Spec: Section:Figure</b>
Type	Collection(Drive.Drive)	
Description	The set of drives attached to the storage controllers that this resource represents.	N/A
LongDescription	This property shall contain a set of the drives attached to the storage controllers that this resource represents.	
Mandatory	Required (for NVMe Drives). Optional to implement for devices with an NVMe front end interface, e.g., opaque arrays).	
Notes	For NVMe Drive implementation, this links to “Drive” object, which contains the physical representation of NVMe Drive information.	

**6.3.2.5 Identifiers** The mapping for `Identifiers` is summarized in Table 9.

**Table 9:** Identifiers mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	NVM Subsystem NVMe Qualified Name (SUBNQN)
Type	Collection(Resource.Identifier)	An array of identifiers
Description	The Durable names for the subsystem.	An array of identifiers
LongDescription	This property shall contain a list of all known durable names for the associated subsystem.	This specifies the NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string. Refer to NVMe Base Specification, section 7.9, for the definition of NVMe Qualified Name. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).
Mandatory	Yes	Yes
Notes	This is an array of unique identifiers for the NVM Subsystem.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

**6.3.2.6 Identifiers.DurableNameFormat** The mapping for `Identifiers.DurableNameFormat` is summarized in Table 10.

**Table 10:** `Identifiers.DurableNameFormat` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Identifiers.DurableNameFormat</code>	NVM Subsystem NVMe Qualified Name (SUBNQN)
Type	<code>Resource.v1_1_0.DurableNameFormat</code>	There is a single value for this array in Subsystem. The property type is of type NVMe Qualified Name (NQN).
Description	The format of the Durable names for the subsystem.	NVM Subsystem NVMe Qualified Name (SUBNQN)
LongDescription	This specifies the format of the associated NVM Subsystem NVMe Qualified Name of type NQN. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).	
Mandatory	No	Yes
Notes	This is an enum with multiple potential values. For this particular usage in Subsystem, there will only be one instance populated, of type NQN.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

**6.3.2.7 Identifiers.DurableName** The mapping for `Identifiers.DurableName` is summarized in Table 11.

**Table 11:** `Identifiers.DurableName` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Identifiers.DurableName</code>	NVM Subsystem NVMe Qualified Name (SUBNQN)
Type	<code>Edm.String</code>	The NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string
Description	The format of the Durable names for the subsystem.	NVM Subsystem NVMe Qualified Name (SUBNQN)
LongDescription	This specifies the NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string. Refer to NVMe Base Specification, section 7.9, for the definition of NVMe Qualified Name. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).	
Mandatory	No	Yes
Notes	For this particular usage in Subsystem, there will only be one instance populated in the <code>identifiers</code> array.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

**6.3.2.8 Links.Enclosures** The mapping for `Links.Enclosures` is summarized in Table 12.

**Table 12:** `Links.Enclosures` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.Enclosures</code>	N/A
Type	<code>Collection(Chassis.Chassis)</code>	N/A
Description	An array of links to the chassis to which this storage subsystem is attached.	N/A
LongDescription	This property shall contain an array of links to resources of type <code>Chassis</code> that represent the physical containers attached to this resource.	N/A
Mandatory	Required	N/A

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	<p>For NVMe Drive implementation, this links to a chassis collection that contains the subsystem's "Drive" object, which contains the physical representation of NVMe Drive information. For devices with an NVMe front end interface, e.g., opaque arrays), this refers to the appropriate chassis instance for the device/system; there may be multiple chassis instances, reflecting different physical entities in the system, such as controllers, drive enclosures, racks, etc).</p>	<p>The functionality comes from the underlying implementation and does not originate in the NVMe specs</p>

---



**6.3.2.9 Links.Enclosures@odata.count** The mapping for `Links.Enclosures@odata.count` is summarized in Table 13.

**Table 13:** `Links.Enclosures@odata.count` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.Enclosures@odata.count</code>	N/A
Type	(odata property)int64	N/A
Description	Count of the number of items in the <code>Links.Enclosures</code> array.	N/A
LongDescription		N/A
Mandatory	Required	N/A
Notes		The functionality comes from the underlying implementation and does not originate in the NVMe specs

**6.3.2.10 Links.HostingStorageSystems** The mapping for `Links.HostingStorageSystems` is summarized in Table 14.

**Table 14:** `Links.Enclosures` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.HostingStorageSystems</code>	N/A
Type	<code>Collection(ComputerSystem.ComputerSystem)</code>	
Description	The storage systems that host this storage subsystem.	N/A
LongDescription	This property shall contain an array of links to resources of type <code>ComputerSystem</code> that represent the storage systems that host this storage subsystem. The members of this array shall be in the <code>StorageSystems</code> resource collection off the service root.	N/A
Mandatory	Recommended for devices with an NVMe front end interface such as opaque arrays.	N/A
Notes	For devices with an NVMe front end interface, e.g., opaque arrays), this refers to the <code>ComputerSystem</code> instances providing the NVMe front end, modeling the device's controller(s).	The functionality comes from the underlying implementation and does not originate in the NVMe specs

**6.3.2.11 Links.SimpleStorage** The mapping for `Links.SimpleStorage` is summarized in Table 15.

**Table 15:** `Links.SimpleStorage` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.SimpleStorage</code>	
Type	<code>SimpleStorage.SimpleStorage</code>	
Description	The link to the simple storage instance that corresponds to this storage.	
LongDescription	This property shall contain a link to a resource of type <code>SimpleStorage</code> that represents the same storage subsystem as this resource.	
Mandatory	Do not implement	
Notes		

**6.3.2.12 Name** The mapping for `Name` is summarized in Table 16.

**Table 16:** `Name` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Name</code>	NVM Subsystem NVMe Qualified Name (SUBNQN)
Type	String	String
Description	The name of the resource or array member.	Uniquely describes the NVM subsystem.

---

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specification-described requirements. This string value shall be of the 'Name' reserved word format.	The NVM Subsystem NVMe Qualified Name is a UTF-8 null-terminated string used (e.g., by host software) as the unique identifier for the NVM subsystem
Mandatory	Yes	Yes (see note)

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	In Redfish, Name is a read-only field.	Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2). Reported in the NVM Subsystem NVMe Qualified Name field of the Identify Controller data structure, bytes 1023:768 (refer to figure 249 in section 5.15.2.1 of the NVMe Base Specification). If the NVM Subsystem NVMe Qualified Name field of the Identify Controller data structure is not supported, then all bytes of this field shall be cleared to 0h. Refer to NVMe Base Specification section 7.9 for the definition of NVMe Qualified Name. Refer to NVMe Base Specification section 7.11 for details on the Unique Identifier, including compatibility with older versions of NVMe Controllers that do not support NVM Subsystem NQNs.

---

**6.3.2.13 Status.State** The mapping for `Status.State` is summarized in Table 17.

**Table 17:** `Status.State` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.State</code>	N/A
Type	<code>Resource.State</code> (enum)	N/A
Description	The known state of the resource, such as, enabled.	N/A
LongDescription	This property shall indicate whether and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.	
Mandatory	Optional for NVMe drives; recommended to implement for NVMe front end devices such as opaque arrays.	No

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values: Enabled / Disabled / StandbyOffline / StandbySpare / InTest / Starting / Absent / UnavailableOffline / Deferring / Quiesced / Updating / Qualified	In general, there is no simple corresponding property or mappable set of information at this time from the NVMe Specifications. Current guidance for NVMe drives: do not implement this property. Guidance will be added in a future version of this document as this is an important concept for clients and for consistency with traditional storage devices. For opaque arrays and other similar devices with an NVMe front end, support and map these properties to the device's concepts of Enabled/Disabled/etc.

---

**6.3.2.14 Status.Health** The mapping for `Status.Health` is summarized in Table 18.

**Table 18:** `Status.Health` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.Health</code>	Critical Warning Condition
Type	<code>Resource.Health</code>	Boolean
Description	The health state of this resource in the absence of its dependent resources.	Indicates the NVM subsystem has detected a condition that causes at least one of bits 0 to 4 in the Critical Warning field of the SMART / Health Information log (refer to NVMe Base Specification section 5.14.1.2) to be set to one.
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	Bits in this field represent the associated state at the time of this event. The Additional Hardware Error Information field shall be set at the time of the event using the same format as is specified for the Critical Warning field of the SMART / Health Information.
Mandatory	Yes	Yes



---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Possible Values: OK / Warning / Critical	Returned as a Critical Warning Condition (code 06h) in the NVM Subsystem Hardware Error Event data (bytes 01:00) of an NVM Subsystem Hardware Error Event (Event Type 05h) in the Persistent Event Log. Reference NVMe Base Specification 5.14.1.13.1.5 NVM Subsystem Hardware Error Event (Event Type 05h), Figure 221 and Figure 222. Implementations of more complex systems, such as opaque arrays and other similar devices with an NVMe front end, may also map this property to the device's concepts of OK/Warning/Critical.

---

**6.3.2.15 Status.HealthRollup** The mapping for `Status.HealthRollup` is summarized in Table 19.

**Table 19:** `Status.HealthRollup` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.HealthRollup</code>	Critical Warning
Type	<code>Resource.Health</code>	Boolean
Description	The overall health state from the view of this resource.	Indicates the NVM subsystem reliability has been degraded due to significant media related errors or any internal error that degrades NVM subsystem reliability.
LongDescription	This property shall represent the health state of the resource and its dependent resources. The values shall conform to those defined in the Redfish Specification.	Indicates if the NVM subsystem reliability has been degraded due to significant media related errors or any internal error that degrades NVM subsystem reliability. Critical warnings regarding the health of the NVM subsystem may be indicated via an asynchronous event notification to the host. The warnings that results in an asynchronous event notification to the host are configured using the Set Features command; refer to section 5.21.1.11.
Mandatory	Yes	Yes

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Possible Values: OK / Warning / Critical	Returned in byte 00, bit 1 of the Get Log Page – SMART / Health Information Log. Reference the NVMe Base Specification section 5.14.1.2 - SMART / Health Information (Log Identifier 02h), Figure 196. Implementations of more complex systems, such as opaque arrays and other similar devices with an NVMe front end, may also map this property to the device’s concepts of OK/Warning/Critical.

---

**6.3.2.16 StorageControllers** The mapping for StorageControllers is summarized in Table 20.

**Table 20:** StorageControllers mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	StorageControllers	<b>NVM Spec Property / Field: NVM Spec: Section:Figure</b>
Type	Storage.StorageControllers	
Description	The set of storage controllers that this resource represents.	N/A
LongDescription	This property shall contain a set of the storage controllers that this resource represents.	
Mandatory	Do not implement	
Notes	Deprecated for NVMe use - replaced by Controllers (type StorageController.StorageController).	

**6.3.2.17 StorageGroups** The mapping for StorageGroups is summarized in Table 21.

**Table 21:** StorageGroups mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	StorageGroups	<b>NVM Spec Property / Field: NVM Spec: Section:Figure</b>
Type	StorageGroup.StorageGroup	
Description	All of the storage groups, each of which contains a set of volumes and endpoints that are managed as a group for mapping and masking, that belong to this storage subsystem.	N/A
LongDescription	This property shall contain a link to a resource collection of type StorageGroupsCollection. This property shall be used when implementing mapping and masking.	
Mandatory	Do not implement	
Notes	N/A for NVMe use cases. Deprecated by Connections.	

**6.3.2.18 Volumes** The mapping for `Volumes` is summarized in Table 22.

**Table 22:** Volumes mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Volumes	Allocated Namespace ID list
Type	VolumeCollection.VolumeCollection	List of namespace IDs
Description	The set of volumes instantiated by this storage subsystem.	A list of Allocated Namespaces for this Subsystem
LongDescription	This property shall contain a link to a Resource of type VolumeCollection that contains the set of storage volumes allocated to this instance of an storage subsystem.	A list of namespace IDs is returned to the host containing allocated NSIDs in increasing order.
Mandatory	Required for NVMe drives, as well as opaque arrays and other similar devices with an NVMe front end.	No
Notes	This is a collection of Namespaces that belong to this NVM Subsystem. Refer to the Volume schema for details of the instance information.	Reference NVMe Base Specification section 5.15.2.6 Allocated Namespace ID list (CNS 10h).

## 6.4 NVM Controllers

The Redfish/Swordfish StorageControllers schema is used to represent an NVM Controller.

There are three different types of NVM Controllers: Admin, Discovery, and IO.

### 6.4.1 Admin Controller

**6.4.1.1 Mockup** The following mockup shows a sample representation of the StorageController schema used to represent an Admin Controller.

```
{
  "@Redfish.Copyright": "Copyright 2014-2020 SNIA. All rights reserved.",
  "@odata.id":
  ↪ "/redfish/v1/Storage/OpaqueArray/Controllers/NVMeAdminController",
  "@odata.type": "#StorageController.v1_0_0.StorageController",

  "Name": "NVMe Admin Controller",
  "Description": "Single NVMe Admin Controller for in-band admin command
  ↪ access.",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "Id": "NVMeAdminController",
  "Manufacturer": "Best NVMe Vendor",

  "Model": "NVMe Connect Array",
  "SerialNumber": "NVME123456",
  "PartNumber": "NVM44",
  "FirmwareVersion": "1.0.0",
  "SupportedControllerProtocols": [
    "PCIe"
  ],
  "NVMeControllerProperties": {
    "ControllerType": "Admin",
    "NVMeVersion": "1.3",
    "NVMeControllerAttributes": {
      "SupportsSQAssociations": false,
      "SupportsTrafficBasedKeepAlive": false,
      "SupportsExceedingPowerOfNonOperationalState": false,
      "Supports128BitHostId": false
    }
  }
}
```

### 6.4.1.2 Property Mapping

**6.4.1.2.1 Assembly** The mapping for `Assembly` is summarized in Table 23.

**Table 23:** Assembly mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Description	The Assembly schema defines an assembly. Assembly information contains details about a device, such as part number, serial number, manufacturer, and production date. It also provides access to the original data for the assembly.	N/A
LongDescription	This Resource shall represent an assembly for a Redfish implementation. Assembly information contains details about a device, such as part number, serial number, manufacturer, and production date. It also provides access to the original data for the assembly.	N/A
Mandatory	Do Not Implement for NVMe drives, or devices with NVMe front ends, such as opaque arrays.	
Notes		



**6.4.1.2.2 AssetTag** The mapping for AssetTag is summarized in Table 24.

**Table 24:** Assembly mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	AssetTag	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Edm.String	N/A
Description	The user-assigned asset tag for this storage controller.	N/A
LongDescription	This property shall track the storage controller for inventory purposes.	N/A
Mandatory	Do Not Implement for NVMe Drives, or devices with NVMe front ends, such as opaque arrays.	
Notes		

**6.4.1.2.3 CacheSummary** The mapping for CacheSummary is summarized in Table 25.

**Table 25:** CacheSummary mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	CacheSummary	N/A
Type	ComplexType	N/A
Description	The cache memory of the storage controller in general detail.	N/A
LongDescription	This property shall contain properties that describe the cache memory for this resource.	N/A
Mandatory	Do Not Implement	
Notes		This property exists for hw cache reporting in other RF/SF use cases. Not used in NVMe controllers.

**6.4.1.2.4 ControllerRates** The mapping for ControllerRates is summarized in Table 26.

**Table 26:** ControllerRates mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	ControllerRates	N/A
Type	ComplexType	N/A
Description	This property describes the various controller rates used for processes such as volume rebuild or consistency checks.	N/A
LongDescription	This object shall contain all the rate settings available on the controller.	N/A
Mandatory	Do Not Implement	
Notes		

**6.4.1.2.5 Description** The mapping for `Description` is summarized in Table 27.

**Table 27:** Description mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Type	String	
Description	The description of this resource.	
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specification-described requirements.	
Mandatory	Optional	N/A
Notes	In Redfish, <code>Description</code> is a read-only field.	Return the common description: “An NVM Admin Controller exposes capabilities that allow a host to manage an NVM subsystem. Admin controllers support commands providing management capabilities but does not provide IO access.”

**6.4.1.2.6 FirmwareVersion** The mapping for `FirmwareVersion` is summarized in Table 28.

**Table 28:** `FirmwareVersion` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>FirmwareVersion</code>	<b>NVM Spec Property / Field:</b> IdentifyController: Firmare Revision (FR) <b>NVM Spec:</b> <b>Section:Figure</b> 249: 71:64
Type	String	
Description	The firmware version of this storage controller.	
LongDescription	This property shall contain the firmware version as defined by the manufacturer for the associated storage controller.	
Mandatory	Required.	Required
Notes		Return the currently active firmware revision information.

**6.4.1.2.7 Identifiers** The mapping for `Identifiers` is summarized in Table 29.

**Table 29:** Identifiers mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	N/A
Type	Collection(Resource.Identifier)	N/A
Description	The Durable names for the storage controller.	N/A
LongDescription	This property shall contain a list of all known durable names for the associated storage controller.	N/A
Mandatory	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	No
Notes		N/A

**6.4.1.2.8 Identifiers.DurableName** The mapping for `Identifiers.DurableName` is summarized in Table 30.

**Table 30:** `Identifiers.DurableName` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Identifiers.DurableName</code>	N/A
Type	Variable - see notes	N/A
Description	The Durable names for the storage controller.	N/A
LongDescription	T	N/A
Mandatory	Recommend not implementing.	No
Notes	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	N/A

**6.4.1.2.9 Identifiers.DurableNameFormat** The mapping for `Identifiers.DurableNameFormat` is summarized in Table 31.

**Table 31:** `Identifiers.DurableNameFormat` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Identifiers.DurableNameFormat</code>	N/A
Type	enum ( <code>DurableNameFormat</code> )	N/A
Description	The Durable names for the storage controller.	N/A
LongDescription	This property shall contain a list of the types for all known durable names for the associated storage controller. The type determines the length of the corresponding Namespace ID	N/A
Mandatory	Recommend not implementing.	No
Notes	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	N/A



**6.4.1.2.10 Links.AttachedVolumes** The mapping for `Links.AttachedVolumes` is summarized in Table 32.

**Table 32:** `Links.AttachedVolumes` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.AttachedVolumes</code>	N/A
Type	<code>Collection(Volume.Volume)</code>	N/A
Description	An array of links to volumes that are attached to this controller instance.	
LongDescription	This property shall contain a link to the Resources of type Volume that are attached to this instance of storage controller.	
Mandatory	Do not implement (for admin controllers).	N/A
Notes		

**6.4.1.2.11 Links.NetworkDeviceFunctions** The mapping for `Links.NetworkDeviceFunctions` is summarized in Table 33.

**Table 33:** `Links.NetworkDeviceFunctions` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.NetworkDeviceFunctions</code>	N/A
Type	<code>Collection(NetworkDeviceFunction.NetworkDeviceFunction)</code>	
Description	The network device functions that provide connectivity to this controller.	
LongDescription	This property shall contain an array of links to resources of type <code>NetworkDeviceFunction</code> that represent the devices that provide connectivity to this controller.	
Mandatory	Recommended to implement for more complex devices with NVMe front ends, such as opaque arrays.	
Notes	For NVMe-oF configurations.	

**6.4.1.2.12 Location** The mapping for `Location` is summarized in Table 34.

**Table 34:** Location mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Location	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Collection(Resource.Location)	
Description	The location of the storage controller.	
LongDescription	This property shall contain location information of the associated storage controller.	N/A
Mandatory	Do Not Implement for NVM Drives or more complex devices with an NVMe front end, such as opaque arrays.	
Notes		

**6.4.1.2.13 Manufacturer** The mapping for `Manufacturer` is summarized in Table 35.

**Table 35:** Manufacturer mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Manufacturer	NVM Spec Property / Field:** IdentifyController / PCI Vendor ID (VID) <b>NVM Spec:</b> <b>Section: Figure</b> 249 byte 00:01
Type	String	
Description	The manufacturer of this storage controller.	The company vendor identifier
LongDescription	This property shall contain the name of the organization responsible for producing the storage controller. This organization might be the entity from whom the storage controller is purchased, but this is not necessarily true.	The company vendor identifier that is assigned by the PCI SIG. This is the same value as reported in the ID register
Mandatory	Recommended	
Notes		End clients expect to see the name of the company (e.g.; Contoso, BestVendor). While the value may be filled from the IdentifyController PCI Vendor ID or SubsystemID field, it would be preferable to have this filled with the actual string value of the company name.

**6.4.1.2.14 Model** The mapping for `Model` is summarized in Table 36.

**Table 36:** Model mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Model	<b>NVM Spec Property / Field:</b> IdentifyController / Model Number (MN) <b>NVM Spec:</b> <b>Section: Figure</b> 249 byte 24:63
Type	String	
Description	The model number for the storage controller.	
LongDescription	This property shall contain the name by which the manufacturer generally refers to the storage controller.	Contains the model number for the NVM subsystem that is assigned by the vendor as an ASCII string. Refer to section 7.10 for unique identifier requirements. Refer to section 1.5 for ASCII string requirements
Mandatory	Recommended	
Notes		

**6.4.1.2.15 Name** The mapping for `Name` is summarized in Table 37.

**Table 37:** Name mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Name	<b>NVM Spec Property / Field:</b> Controller ID (CNTLID) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	String	<b>NVM Spec Property Type:</b> 16-bit hex value <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 79:78, IdentifyController data structure
Description	The name of the resource or array member.	
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specification-described requirements. This string value shall be of the 'Name' reserved word format.	
Mandatory	Required	Mandatory
Notes	In Redfish, Name is a read-only field.	Map the CNTLID field to a string with the format: "0xABCD"

**6.4.1.2.16 NVMeControllerProperties.ControllerType** The mapping for NVMe-ControllerProperties.ControllerType is summarized in Table 38.

**Table 38:** NVMeControllerProperties.ControllerType mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.ControllerType	<b>NVM Spec Property / Field:</b> Controller Type (CNTRL_TYPE) <b>NVM Spec: Section:Figure</b> Section 5.15.2.2 (IdentifyController), Figure 249 Byte 111
Type	StorageController.v1_0_0.NVMeControllerType	ControllerType
Description	This property specifies the type of NVMe Controller.	Controller Type
LongDescription	This property shall specify the type of NVMe Controller.	This field specifies the controller type. A value of 0h indicates that the controller type is not reported.
Mandatory	Required	Required
Notes	This property must be used to specify the type of NVMe Controller. For an admin controller, set to Admin.	For Admin Controller - value in Identify Controller is '03h'. Return "Admin"

**6.4.1.2.17 NVMeControllerProperties.NVMeVersion** The mapping for `NVMeControllerProperties.NVMeVersion` is summarized in Table 39.

**Table 39:** `NVMeControllerProperties.NVMeVersion` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeControllerProperties.NVMeVersion</code>	<b>NVM Spec Property / Field:</b> Version (VER) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	String	<b>NVM Spec Property Type:</b> Maps from register 3.1.2. <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 83:90
Description	The version of the NVMe Base Specification supported.	
LongDescription	This property shall specify the type of NVMe Controller.	
Mandatory		Mandatory
Notes		Implementations compliant to revision 1.2 or later of this specification shall report a non-zero value in this field. Map from corresponding value in register 3.1.2 to string as “1.0”, “1.1”, “1.2”, “1.2.1”, “1.3.0”, “1.4.0”, etc.



**6.4.1.2.18 NVMeControllerProperties.NVMeControllerAttributes.ReportsNamespaceGranularity**

The mapping for NVMeControllerProperties.NVMeControllerAttributes.ReportsNamespaceGranularity is summarized in Table 40.

**Table 40:** NVMeControllerProperties.NVMeControllerAttributes.ReportsNamespaceGranularity mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.ReportsNamespaceGranularity	<b>NVM Spec</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 7 (Namespace Granularity) <b>NVM</b> <b>Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 7 of Byte 99:96
Description	Indicates whether or not the controller supports reporting of Namespace Granularity.	
LongDescription	This property shall indicate whether or not the controller supports reporting of Namespace Granularity.	
Mandatory	Recommended for NVM Drives and more complex devices with NVMe front ends, such as opaque arrays.	

---

Redfish/Swordfish	NVMe / NVMe-oF
Notes	

---

#### 6.4.1.2.19 NVMeControllerProperties.NVMeControllerAttributes.SupportsSQAssociations

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsSQAssociations is summarized in Table 41.

**Table 41:**

NVMeControllerProperties.NVMeControllerAttributes.SupportsSQAssociations mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsSQAssociations	<b>NVM Spec</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 8 (SQ Associations) <b>NVM</b> <b>Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 8 of Byte 99:96
Description	Indicates whether or not the controller supports SQ Associations.	
LongDescription	This property shall indicate whether or not the controller supports SQ Associations.	
Mandatory		
Notes		

#### 6.4.1.2.20 NVMeControllerProperties.NVMeControllerAttributes.SupportsTrafficBasedKeepAlive

The mapping for NVMeControllerProperties.NVMeControllerAttributes.TrafficBasedKeepAlive is summarized in Table 42.

**Table 42:**

NVMeControllerProperties.NVMeControllerAttributes.SupportsTrafficBasedKeepAlive mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsTrafficBasedKeepAlive	<p><b>NVM Spec:</b>  <b>Property / Field:</b>            Controller            Attributes            (CTRATT): Bit 6            (Traffic Based            Keep Alive            Support – TBKAS)</p> <p><b>NVM Spec:</b>  <b>Section:Figure</b>            NVMe 1.4a:            Section 5.15.2.2            (IdentifyCon-            troller), Figure            249</p> <p><b>NVM Spec</b>  <b>Property Type:</b>            Single bit (bool)</p> <p><b>Additional NVM            Spec Identifying            Information:</b> Bit            6 of Byte 99:96</p>
Type	Boolean	
Description	Indicates whether or not the controller supports restarting KeepAlive Timer if traffic is processed from an admin command or IO during KeepAlive Timeout interval.	

---

Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall indicate whether or not the controller supports restarting KeepAlive Timer if traffic is processed from an admin command or IO during KeepAlive Timeout interval.
Mandatory	Required for Ethernet-Attach Drives; required for more complex devices with NVMe front ends, such as opaque arrays.
Notes	

---

#### 6.4.1.2.21 NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOperationalState

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOperationalState is summarized in Table 43.

**Table 43:** NVMeControllerProperties.NVMeControllerAttributes. SupportsExceedingPowerOfNonOperationalState mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOperationalState	<b>NVM Spec</b> <b>Property /</b> <b>Field:</b> Controller Attributes (CTRATT): Bit 1 (Non- Operational Power State Permissive Mode) <b>NVM</b> <b>Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional</b> <b>NVM Spec</b> <b>Identifying</b> <b>Information:</b> Bit 1 of Byte 99:96

---

Redfish/Swordfish	NVMe / NVMe-oF
<p>Description Indicates whether or not the controller supports exceeding Power of NonOperational State in order to execute controller initiated background operations in a non-operational power state.</p>	
<p>LongDescription This property shall indicate whether or not the controller supports exceeding Power of NonOperational State in order to execute controller initiated background operations in a non-operational power state.</p>	
Mandatory	
Notes	

---

**6.4.1.2.22 NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId**

The mapping for NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId is summarized in Table 44.

**Table 44:**

NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId	<b>NVM Spec:</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 0 <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 0 of Byte 99:96
Description	Indicates whether or not the controller supports a 128-bit Host Identifier.	
LongDescription	This property shall indicate whether or not the controller supports a 128-bit Host Identifier.	
Mandatory		
Notes		



**6.4.1.2.23 NVMeControllerProperties.MaxQueueSize** The mapping for NVMeControllerProperties.MaxQueueSize is summarized in Table 45.

**Table 45:** NVMeControllerProperties.ANCharacteristics mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.MaxQueueSize	<b>NVM Spec Property / Field:</b> Maximum Queues Entries Supported (MQES) <b>NVM Spec: Section:Figure</b> NVMe 1.4a; Section 3.1.1 Controller Capabilities; Figure 69
Type	Int64	<b>NVM Spec Property Type: Additional NVM Spec Identifying Information:</b> ByteOffset: Bits 15:00
Description	Indicates the maximum individual queue size that an NVMe IO Controller supports.	
LongDescription	This property shall contain the maximum individual queue entry size supported per queue. This is a zero-based value, where the minimum value is one, indicating two entries. For PCIe, this applies to both submission and completion queues. For NVMe-oF, this applies to only submission queues.	
Mandatory	Implement for more complex devices with NVMe front ends, such as opaque arrays.	
Notes		

**6.4.1.2.24 NVMeControllerProperties.MaxQueueSize** The mapping for `NVMeControllerProperties.ANCharacteristics` is summarized in Table 46.

**Table 46:** `NNVMeControllerProperties.ANCharacteristics` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeControllerProperties.ANCharacteristics</code>	
Type	<code>Collection(StorageController.v1_0_0.ANCharacteristics)</code>	
Description	This property contains the combination of ANA type and volume information.	
LongDescription	This property shall contain the combination of ANA type and volume information.	
Mandatory		
Notes		

**6.4.1.2.25 NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSystemDegraded**

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSystemDegraded is summarized in Table 47.

**Table 47:**

NVMeControllerProperties.NVMeSMARTCriticalWarnings. OverallSystemDegraded mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSystemDegraded	<b>NVM Spec</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 2 of Byte 00
Description	Indicates that the NVM subsystem reliability has been compromised.	
LongDescription	This property shall indicate that the NVM subsystem reliability has been compromised.	
Mandatory	Required	
Notes		

**6.4.1.2.26 NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed**

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed is summarized in Table 48.

**Table 48:**

NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed	<b>NVM Spec</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 4 of Byte 00
Description	Indicates that the volatile memory backup device has failed.	
LongDescription	This property shall indicate that the volatile memory backup device has failed.	
Mandatory	Recommended for NVM Drives. Required for more complex devices with NVMe front ends, such as opaque arrays.	
Notes		

**6.4.1.2.27 SKU** The mapping for SKU is summarized in Table 49.

**Table 49:** SKU mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	SKU	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Edm.String	N/A
Description	The SKU for this storage controller.	N/A
LongDescription	This property shall contain the stock-keeping unit number for this storage storage controller.	N/A
Mandatory	Do Not Implement	
Notes		

**6.4.1.2.28 SpeedGbps** The mapping for SpeedGbps is summarized in Table 50.

**Table 50:** SpeedGbps mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	SpeedGbps	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Decimal	N/A
Description	The maximum speed of the storage controller's device interface.	N/A
LongDescription	This property shall represent the maximum supported speed of the storage bus interface, in Gbit/s. The specified interface connects the controller to the storage devices, not the controller to a host. For example, SAS bus not PCIe host bus.	N/A
Mandatory	Do Not Implement	
Notes		

**6.4.1.2.29 Status.Health** The mapping for `Status.Health` is summarized in Table 51.

**Table 51:** `Status.Health` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.Health</code>	<b>NVM Spec Property / Field:</b> CSTS – Controller Status <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 3.1.6, Figure 79 <b>NVM Spec</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	<code>Resource.Health</code>	<b>NVM Spec Property Type:</b>
Description	The health state of this resource in the absence of its dependent resources.	
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
Mandatory		
Notes	Possible Values: OK / Warning / Critical	This comes from CSTS Controller Failure Status, and from the SMART / health information log critical warning field.

**6.4.1.2.30 Status.State** The mapping for `Status.State` is summarized in Table 52.

**Table 52:** `Status.State` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.State</code>	<b>NVM Spec Property / Field:</b> CSTS – Controller Status <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 3.1.6, Figure 79
Type	<code>Resource.State</code> (enum)	<b>NVM Spec Property Type:</b>
Description	The known state of the resource, such as, enabled.	
LongDescription	This property shall indicate whether and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.	
Mandatory		Mandatory



---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values: Enabled / Disabled / StandbyOffline / StandbySpare / InTest / Starting / Absent / UnavailableOffline / Deferring / Quiesced / Updating / Qualified	Ready (CSTS.RDY) maps to Enabled, Shutdown (CSTS.SHST) value will tell you if shutdown is in progress or complete (StandbyOffline), ProcessingPaused (CSTS.PP) maps to Deferring. If both Ready and Shutdown are indicated, then the system should indicate StandbyOffline. If both Ready and ProcessingPaused are indicated, then the system should indicate Deferring.

---

**6.4.1.2.31 SupportedControllerProtocols** The mapping for SupportedControllerProtocols is summarized in Table 53.

**Table 53:** SupportedControllerProtocols mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	SupportedControllerProtocols	N/A
Type	Collection(Protocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The supported set of protocols for communicating to this storage controller.	
LongDescription	This property shall contain the supported set of protocols for communicating to this storage controller.	
Mandatory	Required.	
Notes	This is an array of protocols supported by the StorageController. This can be set to values including, but not limited to, PCIe, RDMA, NVMe-oF, RoCE, RoCEv2, and InfiniBand.	

**6.4.1.2.32 SupportedDeviceProtocols** The mapping for SupportedDeviceProtocols is summarized in Table 54.

**Table 54:** SupportedDeviceProtocols mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	SupportedDeviceProtocols	N/A
Type	Collection(Protocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The protocols that the storage controller can use to communicate with attached devices.	
LongDescription	This property shall contain the set of protocols this storage controller can use to communicate with attached devices.	
Mandatory		
Notes	Do not implement.	

## 6.4.2 Discovery Controller

**6.4.2.1 Mockup** The following mockup shows a sample representation of the StorageController schema used to represent a Discovery Controller.

```
{
  "@Redfish.Copyright": "Copyright 2014-2020 SNIA. All rights reserved.",
  "@odata.id":
  ↪ "/redfish/v1/Storage/NVMe-oF-Subsystem/Controllers/NVMeIOController",
  "@odata.type": "#StorageController.v1_0_0.StorageController",
  "Id": "9",
  "Name": "NVMe Logical Discovery Controller",
  "Description": "Single NVMe Discovery Controller presented to host.",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "Id": "NVMeDiscoveryController",

  "SupportedControllerProtocols": [
    "TCP", "RDMA", "FC"
  ],
  "SupportedDeviceProtocols": [
    "NVMeOverFabrics"
  ],

  "NVMeControllerProperties": {
    "ControllerType": "Discovery",
    "NVMeVersion": "1.3",
    "NVMeControllerAttributes": {
      "SupportsTrafficBasedKeepAlive": false,
      "SupportsExceedingPowerOfNonOperationalState": false,
      "Supports128BitHostId": false
    }
  }
}
```

## 6.4.2.2 Property Mapping

**6.4.2.2.1 Assembly** The mapping for `Assembly` is summarized in Table 55.

**Table 55:** Assembly mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Assembly	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	ComplexType	N/A
Description	The Assembly schema defines an assembly. Assembly information contains details about a device, such as part number, serial number, manufacturer, and production date. It also provides access to the original data for the assembly.	N/A
LongDescription	This Resource shall represent an assembly for a Redfish implementation. Assembly information contains details about a device, such as part number, serial number, manufacturer, and production date. It also provides access to the original data for the assembly.	N/A
Mandatory	Do Not Implement for NVMe drives, or devices with NVMe front ends, such as opaque arrays.	

---

Redfish/Swordfish	NVMe / NVMe-oF
Notes	

---

**6.4.2.2.2 AssetTag** The mapping for AssetTag is summarized in Table 56.

**Table 56:** Assembly mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	AssetTag	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Edm.String	N/A
Description	The user-assigned asset tag for this storage controller.	N/A
LongDescription	This property shall track the storage controller for inventory purposes.	N/A
Mandatory	Do Not Implement for NVMe Drives, or devices with NVMe front ends, such as opaque arrays.	
Notes		

**6.4.2.2.3 CacheSummary** The mapping for CacheSummary is summarized in Table 57.

**Table 57:** CacheSummary mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	CacheSummary	N/A
Type	ComplexType	N/A
Description	The cache memory of the storage controller in general detail.	N/A
LongDescription	This property shall contain properties that describe the cache memory for this resource.	N/A
Mandatory	Do Not Implement	
Notes		This property exists for hw cache reporting in other RF/SF use cases. Not used in NVMe controllers.



**6.4.2.2.4 ControllerRates** The mapping for ControllerRates is summarized in Table 58.

**Table 58:** ControllerRates mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	ControllerRates	N/A
Type	ComplexType	N/A
Description	This property describes the various controller rates used for processes such as volume rebuild or consistency checks.	N/A
LongDescription	This object shall contain all the rate settings available on the controller.	N/A
Mandatory	Do Not Implement	
Notes		

**6.4.2.2.5 Description** The mapping for `Description` is summarized in Table 59.

**Table 59:** Description mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Type	String	
Description	The description of this resource.	
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specification-described requirements.	
Mandatory	Optional	N/A
Notes	In Redfish, <code>Description</code> is a read-only field.	Return the common description: “An NVM Discovery Controller exposes capabilities that allow a host to retrieve information required to connect to one or more NVM Subsystems. Discovery controllers only support commands providing discovery capabilities; they do not provide IO or management access.”

**6.4.2.2.6 FirmwareVersion** The mapping for `FirmwareVersion` is summarized in Table 60.

**Table 60:** FirmwareVersion mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	FirmwareVersion	<b>NVM Spec Property / Field:</b> IdentifyController: Firmare Revision (FR) <b>NVM Spec:</b> <b>Section:Figure 249: 71:64</b>
Type	String	
Description	The firmware version of this storage controller.	
LongDescription	This property shall contain the firmware version as defined by the manufacturer for the associated storage controller.	
Mandatory	Required.	Required
Notes		Return the currently active firmware revision information.

**6.4.2.2.7 Identifiers** The mapping for `Identifiers` is summarized in Table 61.

**Table 61:** Identifiers mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	N/A
Type	Collection(Resource.Identifier)	N/A
Description	The Durable names for the storage controller.	
LongDescription	This property shall contain a list of all known durable names for the associated storage controller.	

	Redfish/Swordfish	NVMe / NVMe-oF
Mandatory	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	No
Notes		N/A

**6.4.2.2.8 Identifiers.DurableName** The mapping for `Identifiers.DurableName` is summarized in Table 62.

**Table 62:** `Identifiers.DurableName` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Identifiers.DurableName</code>	N/A
Type	Variable - see notes	N/A
Description	The Durable names for the storage controller.	N/A
LongDescription	T	N/A
Mandatory	Recommend not implementing.	No
Notes	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	N/A

**6.4.2.2.9 Identifiers.DurableNameFormat** The mapping for `Identifiers.DurableNameFormat` is summarized in Table 63.

**Table 63:** Identifiers.DurableNameFormat mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers.DurableNameFormat	N/A
Type	enum (DurableNameFormat)	N/A
Description	The Durable names for the storage controller.	N/A
LongDescription	This property shall contain a list of the types for all known durable names for the associated storage controller. The type determines the length of the corresponding Namespace ID	N/A
Mandatory	Recommend not implementing.	No
Notes	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	N/A

**6.4.2.2.10 Links.AttachedVolumes** The mapping for Links.AttachedVolumes is summarized in Table 64.

**Table 64:** Links.AttachedVolumes mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Links.AttachedVolumes	N/A
Type	Collection(Volume.Volume)	N/A
Description	An array of links to volumes that are attached to this controller instance.	

---

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain a link to the Resources of type Volume that are attached to this instance of storage controller.	
Mandatory	Do not implement.	N/A
Notes		

---

**6.4.2.2.11 Links.Endpoints** The mapping for `Links.Endpoints` is summarized in Table 65.

**Table 65:** `Links.Endpoints` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.Endpoints</code>	N/A
Type	Collection( <code>Endpoint.Endpoint</code> )	
Description	An array of links to the endpoints that connect to this controller.	
LongDescription	This property shall contain an array of links to the Resources of type <code>Endpoint</code> associated with this controller.	
Mandatory	Yes	
Notes		

**6.4.2.2.12 Links.Connections** The mapping for `Links.Connections` is summarized in Table 66.

**Table 66:** `Links.Connections` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.Connections</code>	N/A
Type	<code>Collection(Connection.Connection)</code>	
Description	An array of links to volumes that are attached to this controller instance.	
LongDescription	This property shall contain a link to the Resources of type Volume that are attached to this instance of storage controller.	
Mandatory		
Notes	This contains the information used to represent the allowed hosts.	This property contains pointers to the Connections objects. The information about allowed hosts is mapped to the Connections objects for NVMe-oF configurations.

**6.4.2.2.13 Links.NetworkDeviceFunctions** The mapping for `Links.NetworkDeviceFunctions` is summarized in Table 67.

**Table 67:** `Links.NetworkDeviceFunctions` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.NetworkDeviceFunctions</code>	N/A
Type	<code>Collection(NetworkDeviceFunction.NetworkDeviceFunction)</code>	
Description	The network device functions that provide connectivity to this controller.	



	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain an array of links to resources of type NetworkDeviceFunction that represent the devices that provide connectivity to this controller.	
Mandatory	Recommended to implement for more complex devices with NVMe front ends, such as opaque arrays.	
Notes	For NVMe-oF configurations.	

**6.4.2.2.14 Location** The mapping for Location is summarized in Table 68.

**Table 68:** Location mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Location	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Collection(Resource.Location)	
Description	The location of the storage controller.	
LongDescription	This property shall contain location information of the associated storage controller.	N/A
Mandatory	Do Not Implement for NVM Drives, or more complex devices with NVMe front ends, such as opaque arrays.	
Notes		

**6.4.2.2.15 Manufacturer** The mapping for Manufacturer is summarized in Table 69.

**Table 69:** Manufacturer mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Manufacturer	NVM Spec Property / Field:** IdentifyController / PCI Vendor ID (VID) <b>NVM Spec:</b> <b>Section: Figure</b> 249 byte 00:01
Type	String	
Description	The manufacturer of this storage controller.	The company vendor identifier
LongDescription	This property shall contain the name of the organization responsible for producing the storage controller. This organization might be the entity from whom the storage controller is purchased, but this is not necessarily true.	The company vendor identifier that is assigned by the PCI SIG. This is the same value as reported in the ID register
Mandatory	Optional	
Notes		End clients expect to see the name of the company (e.g.; Contoso, BestVendor). While the value may be filled from the IdentifyController PCI Vendor ID or SubsystemID field, it would be preferable to have this filled with the actual string value of the company name.

**6.4.2.2.16 Model** The mapping for Model is summarized in Table 70.

**Table 70:** Model mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Model	
Type	String	N/A
Description	The model number for the storage controller.	
LongDescription	This property shall contain the name by which the manufacturer generally refers to the storage controller.	N/A
Mandatory	Optional	
Notes		

**6.4.2.2.17 Name** The mapping for Name is summarized in Table 71.

**Table 71:** Name mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Name	<b>NVM Spec Property / Field:</b> Controller ID (CNTLID) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	String	<b>NVM Spec Property Type:</b> 16-bit hex value <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 79:78, IdentifyController data structure
Description	The name of the resource or array member.	
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specification-described requirements. This string value shall be of the 'Name' reserved word format.	
Mandatory	Required	Mandatory
Notes	In Redfish, Name is a read-only field.	Map the CNTLID field to a string with the format: "0xABCD"

**6.4.2.2.18 NVMeControllerProperties.ControllerType** The mapping for NVMe-ControllerProperties.ControllerType is summarized in Table 72.

**Table 72:** NVMeControllerProperties.ControllerType mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.ControllerType	<b>NVM Spec Property / Field:</b> Controller Type (CNTRL_TYPE) <b>NVM Spec: Section:Figure</b> Section 5.15.2.2 (IdentifyController), Figure 249 Byte 111
Type	StorageController.v1_0_0.NVMeControllerType	Integer
Description	This property specifies the type of NVMe Controller.	Controller type.
LongDescription	This property shall specify the type of NVMe Controller.	This field specifies the controller type. A value of 0h indicates that the controller type is not reported.
Mandatory	Required property when Discovery controller is implemented.	Required
Notes	This property must be used to specify the type of NVMe Controller. For a discovery controller, set to Discovery.	For Discovery Controller - value in Identify Controller is '02h'. Return "Discovery"

**6.4.2.2.19 NVMeControllerProperties.NVMeVersion** The mapping for `NVMeControllerProperties.NVMeVersion` is summarized in Table 73.

**Table 73:** `NVMeControllerProperties.NVMeVersion` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeControllerProperties.NVMeVersion</code>	<b>NVM Spec Property / Field:</b> Version (VER) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	String	<b>NVM Spec Property Type:</b> Maps from register 3.1.2. <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 83:90
Description	The version of the NVMe Base Specification supported.	
LongDescription	This property shall specify the type of NVMe Controller.	
Mandatory		Mandatory
Notes		Implementations compliant to revision 1.2 or later of this specification shall report a non-zero value in this field. Map from corresponding value in register 3.1.2 to string as “1.0”, “1.1”, “1.2”, “1.2.1”, “1.3.0”, “1.4.0”, etc.

**6.4.2.2.20 NVMeControllerProperties.NVMeControllerAttributes.SupportsTrafficBasedKeepAlive**

The mapping for NVMeControllerProperties.NVMeControllerAttributes.TrafficBasedKeepAlive is summarized in Table 74.

**Table 74:**

NVMeControllerProperties.NVMeControllerAttributes.SupportsTrafficBasedKeepAlive mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsTrafficBasedKeepAlive	<b>NVM Spec:</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 6 (Traffic Based Keep Alive Support – TBKAS) <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 6 of Byte 99:96
Description	Indicates whether or not the controller supports restarting KeepAlive Timer if traffic is processed from an admin command or IO during KeepAlive Timeout interval.	

---

Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall indicate whether or not the controller supports restarting KeepAlive Timer if traffic is processed from an admin command or IO during KeepAlive Timeout interval.
Mandatory	Required for Ethernet-Attach Drives; required for more complex devices with NVMe front ends, such as opaque arrays.
Notes	

---



#### 6.4.2.2.21 NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOperationalState

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOperationalState is summarized in Table 75.

**Table 75:** NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOperationalState mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOperationalState	<b>NVM Spec</b> <b>Property /</b> <b>Field:</b> Controller Attributes (CTRATT): Bit 1 (Non-Operational Power State Permissive Mode) <b>NVM</b> <b>Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional</b> <b>NVM Spec</b> <b>Identifying</b> <b>Information:</b> Bit 1 of Byte 99:96

---

Redfish/Swordfish	NVMe / NVMe-oF
<p>Description Indicates whether or not the controller supports exceeding Power of NonOperational State in order to execute controller initiated background operations in a non-operational power state.</p>	
<p>LongDescription This property shall indicate whether or not the controller supports exceeding Power of NonOperational State in order to execute controller initiated background operations in a non-operational power state.</p>	
Mandatory	
Notes	

---

**6.4.2.2.22 NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId**

The mapping for NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId is summarized in Table 76.

**Table 76:**

NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId	<b>NVM Spec:</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 0 <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249 <b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 0 of Byte 99:96
Type	Boolean	
Description	Indicates whether or not the controller supports a 128-bit Host Identifier.	
LongDescription	This property shall indicate whether or not the controller supports a 128-bit Host Identifier.	
Mandatory		
Notes		

**6.4.2.2.23 NVMeControllerProperties.MaxQueueSize** The mapping for `NVMeControllerProperties.MaxQueueSize` is summarized in Table 77.

**Table 77:** `NVMeControllerProperties.ANCharacteristics` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeControllerProperties.MaxQueueSize</code>	<b>NVM Spec Property / Field:</b> Maximum Queues Entries Supported (MQES) <b>NVM Spec: Section:Figure</b> NVMe 1.4a; Section 3.1.1 Controller Capabilities; Figure 69
Type	Int64	<b>NVM Spec Property Type: Additional NVM Spec Identifying Information:</b> ByteOffset: Bits 15:00
Description	Indicates the maximum individual queue size that an NVMe IO Controller supports.	
LongDescription	This property shall contain the maximum individual queue entry size supported per queue. This is a zero-based value, where the minimum value is one, indicating two entries. For PCIe, this applies to both submission and completion queues. For NVMe-oF, this applies to only submission queues.	
Mandatory	Implement for more complex devices with NVMe front ends, such as opaque arrays.	
Notes		

**6.4.2.2.24 NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSubsystemDegraded**

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSubsystemDegraded is summarized in Table 78.

**Table 78:**

NVMeControllerProperties.NVMeSMARTCriticalWarnings. OverallSubsystemDegraded mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSubsystemDegraded	<b>NVM Spec</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 2 of Byte 00
Description	Indicates that the NVM subsystem reliability has been compromised.	
LongDescription	This property shall indicate that the NVM subsystem reliability has been compromised.	
Mandatory	Required	
Notes		

**6.4.2.2.25 NVMeControllerProperties.NVMeSMARTCriticalWarnings.SpareCapacityWornOut**

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.SpareCapacityWornOut is summarized in Table 79.

**Table 79:**

NVMeControllerProperties.NVMeSMARTCriticalWarnings. SpareCapacityWornOut mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeSMARTCriticalWarnings.SpareCapacityWornOut	<b>NVM Spec:</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 0 of Byte 00
Description	Indicates that the available spare capacity has fallen below the threshold.	
LongDescription	This property shall indicate that the available spare capacity has fallen below the threshold.	
Mandatory	Required	
Notes		

**6.4.2.2.26 NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed**

The mapping for `NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed` is summarized in Table 80.

**Table 80:**

`NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed</code>	<b>NVM Spec</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 4 of Byte 00
Description	Indicates that the volatile memory backup device has failed.	
LongDescription	This property shall indicate that the volatile memory backup device has failed.	
Mandatory	Recommended for NVM Drives. Required for more complex devices with NVMe front ends, such as opaque arrays.	
Notes		

**6.4.2.2.27 Status.Health** The mapping for `Status.Health` is summarized in Table 81.

**Table 81:** `Status.Health` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.Health</code>	<b>NVM Spec Property / Field:</b> CSTS – Controller Status <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 3.1.6, Figure 79 <b>NVM Spec</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	<code>Resource.Health</code>	<b>NVM Spec Property Type:</b>
Description	The health state of this resource in the absence of its dependent resources.	
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
Mandatory		
Notes	Possible Values: OK / Warning / Critical	This comes from CSTS Controller Failure Status, and from the SMART / health information log critical warning field.



**6.4.2.2.28 Status.State** The mapping for `Status.State` is summarized in Table 82.

**Table 82:** `Status.State` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.State</code>	<b>NVM Spec Property / Field:</b> CSTS – Controller Status <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 3.1.6, Figure 79
Type	<code>Resource.State</code> (enum)	<b>NVM Spec Property Type:</b>
Description	The known state of the resource, such as, enabled.	
LongDescription	This property shall indicate whether and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.	
Mandatory		Mandatory

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values: Enabled / Disabled / StandbyOffline / StandbySpare / InTest / Starting / Absent / UnavailableOffline / Deferring / Quiesced / Updating / Qualified	Ready (CSTS.RDY) maps to Enabled, Shutdown (CSTS.SHST) value will tell you if shutdown is in progress or complete (StandbyOffline), ProcessingPaused (CSTS.PP) maps to Deferring. If both Ready and Shutdown are indicated, then the system should indicate StandbyOffline. If both Ready and ProcessingPaused are indicated, then the system should indicate Deferring.

---

**6.4.2.2.29 SupportedControllerProtocols** The mapping for SupportedControllerProtocols is summarized in Table 83.

**Table 83:** SupportedControllerProtocols mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	SupportedControllerProtocols	N/A
Type	Collection(Protocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The supported set of protocols for communicating to this storage controller.	
LongDescription	This property shall contain the supported set of protocols for communicating to this storage controller.	
Mandatory	Required.	
Notes	This is an array of protocols supported by the StorageController. This can be set to values including, but not limited to, PCIe, RDMA, NVMe-oF, RoCE, RoCEv2, and InfiniBand.	

**6.4.2.2.30 SupportedDeviceProtocols** The mapping for SupportedDeviceProtocols is summarized in Table 84.

**Table 84:** SupportedDeviceProtocols mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	SupportedDeviceProtocols	N/A
Type	Collection(Protocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The protocols that the storage controller can use to communicate with attached devices.	
LongDescription	This property shall contain the set of protocols this storage controller can use to communicate with attached devices.	
Mandatory		
Notes	Do not implement.	

### 6.4.3 IO Controller

**6.4.3.1 Mockup** The following mockup shows a sample representation of the StorageController schema used to represent an IO Controller.

```
{
  "@Redfish.Copyright": "Copyright 2014-2020 SNIA. All rights reserved.",
  "@odata.id":
  ↪ "/redfish/v1/Storage/NVMe-oF-Subsystem/Controllers/NVMeIOController",
  "@odata.type": "#StorageController.v1_0_0.StorageController",
  "Id": "9",
  "Name": "NVMe Logical I/O Controller",
  "Description": "Single NVMe I/O Controller presented to host.",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "Id": "NVMeIOController",

  "SupportedControllerProtocols": [
    "TCP", "RDMA", "FC"
  ],
  "SupportedDeviceProtocols": [
    "NVMeOverFabrics"
  ],

  "NVMeControllerProperties": {
    "NVMeVersion": "1.3",
    "NVMeControllerAttributes": {
      "ReportsUUIDList": false,
      "SupportsSQAssociations": false,
      "ReportsNamespaceGranularity": false,
      "SupportsReservations": true,
      "SupportsTrafficBasedKeepAlive": false,
      "SupportsPredictableLatencyMode": false,
      "SupportsEnduranceGroups": false,
      "SupportsReadRecoveryLevels": false,
      "SupportsNVMSets": false,
      "SupportsExceedingPowerOfNonOperationalState": false,
      "Supports128BitHostId": false,
    },
  },

  "MaxQueueSize": 1,
```

```
"ANCharacteristics": [{
  "AccessState": "Optimized",
  "Volume": {
    "@odata.id":
    ↪ "/redfish/v1/Systems/Sys-1/Storage/NVMeSSD-EG/Volumes/namespace1"
  }
}]
},
"Links": {
  "AttachedVolumes": [{
    "@odata.id":
    ↪ "/redfish/v1/Systems/Sys-1/Storage/NVMeSSD-EG/Volumes/namespace1"
  }],
  "Endpoints": [{
    "@odata.id": "/redfish/v1/Fabrics/NVMe-oF/Endpoints/NVMeEndpoint"
  },
  {
    "@odata.id": "/redfish/v1/Fabrics/NVMe-oF/Endpoints/Host"
  }
  ],
  "Connections": [{
    "@odata.id": "/redfish/v1/Fabrics/NVMe-oF/Connections/Host1"
  }
  ]
}
}
```

### 6.4.3.2 Property Mapping

**6.4.3.2.1 Assembly** The mapping for `Assembly` is summarized in Table 85.

**Table 85:** Assembly mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Assembly	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	ComplexType	N/A
Description	The Assembly schema defines an assembly. Assembly information contains details about a device, such as part number, serial number, manufacturer, and production date. It also provides access to the original data for the assembly.	N/A
LongDescription	This Resource shall represent an assembly for a Redfish implementation. Assembly information contains details about a device, such as part number, serial number, manufacturer, and production date. It also provides access to the original data for the assembly.	N/A
Mandatory	Do Not Implement for NVMe drives, or devices with NVMe front ends, such as opaque arrays.	N/A

---

Redfish/Swordfish	NVMe / NVMe-oF
Notes	

---



**6.4.3.2.2 AssetTag** The mapping for AssetTag is summarized in Table 86.

**Table 86:** Assembly mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	AssetTag	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Edm.String	N/A
Description	The user-assigned asset tag for this storage controller.	N/A
LongDescription	This property shall track the storage controller for inventory purposes.	N/A
Mandatory	Do Not Implement for NVMe Drives, or devices with NVMe front ends, such as opaque arrays.	N/A
Notes		

**6.4.3.2.3 CacheSummary** The mapping for CacheSummary is summarized in Table 87.

**Table 87:** CacheSummary mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	CacheSummary	N/A
Type	ComplexType	N/A
Description	The cache memory of the storage controller in general detail.	N/A
LongDescription	This property shall contain properties that describe the cache memory for this resource.	N/A
Mandatory	Do Not Implement	N/A
Notes		This property exists for hw cache reporting in other RF/SF use cases. Not used in NVMe controllers.

**6.4.3.2.4 ControllerRates** The mapping for ControllerRates is summarized in Table 88.

**Table 88:** ControllerRates mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	ControllerRates	N/A
Type	ComplexType	N/A
Description	This property describes the various controller rates used for processes such as volume rebuild or consistency checks.	N/A
LongDescription	This object shall contain all the rate settings available on the controller.	N/A
Mandatory	Do Not Implement	N/A
Notes		

**6.4.3.2.5 Description** The mapping for `Description` is summarized in Table 89.

**Table 89:** Description mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Type	String	N/A
Description	The description of this resource.	N/A
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specification-described requirements.	N/A
Mandatory	Required	N/A
Notes	In Redfish, <code>Description</code> is a read-only field.	Return the common description: “An NVM IO controller is a general-purpose controller that provides access to logical block data and metadata stored on an NVM subsystem’s non-volatile storage medium. IO Controllers may also support management capabilities.”

**6.4.3.2.6 FirmwareVersion** The mapping for `FirmwareVersion` is summarized in Table 90.

**Table 90:** FirmwareVersion mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	FirmwareVersion	<b>NVM Spec Property / Field:</b> IdentifyController: Firmare Revision (FR) <b>NVM Spec:</b> <b>Section:Figure 249: 71:64</b>
Type	String	
Description	The firmware version of this storage controller.	
LongDescription	This property shall contain the firmware version as defined by the manufacturer for the associated storage controller.	
Mandatory	Required.	Required
Notes		Return the currently active firmware revision information.

**6.4.3.2.7 Identifiers** The mapping for `Identifiers` is summarized in Table 91.

**Table 91:** Identifiers mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	N/A
		N/A
Description	The Durable names for the storage controller.	N/A
LongDescription	This property shall contain a list of all known durable names for the associated storage controller.	N/A

	Redfish/Swordfish	NVMe / NVMe-oF
Mandatory	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	N/A
Notes		N/A

**6.4.3.2.8 Identifiers.DurableName** The mapping for `Identifiers.DurableName` is summarized in Table 92.

**Table 92:** `Identifiers.DurableName` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Identifiers.DurableName</code>	N/A
Type	Variable - see notes	N/A
Description	The Durable names for the storage controller.	N/A
LongDescription	T	N/A
Mandatory	Yes	N/A
Notes	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	N/A

**6.4.3.2.9 Identifiers.DurableNameFormat** The mapping for `Identifiers.DurableNameFormat` is summarized in Table 93.

**Table 93:** Identifiers.DurableNameFormat mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers.DurableNameFormat	N/A
Type	enum (DurableNameFormat)	N/A
Description	The Durable names for the storage controller.	N/A
LongDescription	This property shall contain a list of the types for all known durable names for the associated storage controller. The type determines the length of the corresponding Namespace ID	N/A
Mandatory	Recommend not implementing.	N/A
Notes	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	N/A

**6.4.3.2.10 Links.AttachedVolumes** The mapping for `Links.AttachedVolumes` is summarized in Table 94.

**Table 94:** `Links.AttachedVolumes` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.AttachedVolumes</code>	N/A
Type	<code>Collection(Volume.Volume)</code>	N/A
Description	An array of links to volumes that are attached to this controller instance.	
LongDescription	This property shall contain a link to the Resources of type Volume that are attached to this instance of storage controller.	
Mandatory	Required.	Required
Notes	This contains a pointer to the set of namespaces attached to this IO Controller.	The Identify command (refer to NVMe Base spec section 5.15.1) may be used to return a data buffer that describes information about the NVM subsystem, the controller or the namespace(s) and thus may be used to determine the active NSIDs for a controller and the allocated NSIDs in the NVM subsystem



**6.4.3.2.11 Links.Endpoints** The mapping for `Links.Endpoints` is summarized in Table 95.

**Table 95:** `Links.Endpoints` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.Endpoints</code>	N/A
Type	<code>Collection(Endpoint.Endpoint)</code>	N/A
Description	An array of links to the endpoints that connect to this controller.	N/A
LongDescription	This property shall contain an array of links to the Resources of type <code>Endpoint</code> associated with this controller.	N/A
Mandatory		N/A
Notes	For NVMe-oF configurations.	

**6.4.3.2.12 Links.Connections** The mapping for `Links.Connections` is summarized in Table 96.

**Table 96:** `Links.Connections` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.Connections</code>	N/A
Type	<code>Collection(Connection.Connection)</code>	
Description	An array of links to volumes that are attached to this controller instance.	
LongDescription	This property shall contain a link to the Resources of type Volume that are attached to this instance of storage controller.	
Mandatory	N/A for NVMe Drives.	
Notes	This contains the information used to represent the allowed hosts.	This property contains pointers to the <code>Connections</code> objects. The information about allowed hosts is mapped to the <code>Connections</code> objects for NVMe-oF configurations.

**6.4.3.2.13 Links.NetworkDeviceFunctions** The mapping for `Links.NetworkDeviceFunctions` is summarized in Table 97.

**Table 97:** `Links.NetworkDeviceFunctions` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.NetworkDeviceFunctions</code>	N/A
Type	<code>Collection(NetworkDeviceFunction.NetworkDeviceFunction)</code>	
Description	The network device functions that provide connectivity to this controller.	N/A

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain an array of links to resources of type NetworkDeviceFunction that represent the devices that provide connectivity to this controller.	N/A
Mandatory	Recommended to implement for more complex devices with NVMe front ends, such as opaque arrays.	N/A
Notes	For NVMe-oF configurations.	

**6.4.3.2.14 Location** The mapping for Location is summarized in Table 98.

**Table 98:** Location mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Location	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Collection(Resource.Location)	N/A
Description	The location of the storage controller.	N/A
LongDescription	This property shall contain location information of the associated storage controller.	N/A
Mandatory	Do Not Implement for NVM Drives, or more complex devices with NVMe front ends, such as opaque arrays.	N/A
Notes		

**6.4.3.2.15 Manufacturer** The mapping for Manufacturer is summarized in Table 99.

**Table 99:** Manufacturer mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Manufacturer	NVM Spec Property / Field:** IdentifyController / PCI Vendor ID (VID) <b>NVM Spec:</b> <b>Section: Figure 249</b> byte 00:01
Type	String	
Description	The manufacturer of this storage controller.	The company vendor identifier
LongDescription	This property shall contain the name of the organization responsible for producing the storage controller. This organization might be the entity from whom the storage controller is purchased, but this is not necessarily true.	The company vendor identifier that is assigned by the PCI SIG. This is the same value as reported in the ID register
Mandatory	Required	Required
Notes		End clients expect to see the name of the company (e.g.; Contoso, BestVendor). While the value may be filled from the IdentifyController PCI Vendor ID (figure 249) or Subsystem Vendor ID field (figure 24), it would be preferable to have this filled with the actual string value of the company name.

**6.4.3.2.16 Model** The mapping for Model is summarized in Table 100.

**Table 100:** Model mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Model	<b>NVM Spec Property / Field:</b> IdentifyController / Model Number (MN) <b>NVM Spec:</b> <b>Section: Figure</b> 249 byte 24:63
Type	String	
Description	The model number for the storage controller.	
LongDescription	This property shall contain the name by which the manufacturer generally refers to the storage controller.	Model Number (MN): Contains the model number for the NVM subsystem that is assigned by the vendor as an ASCII string. Refer to section 7.10 for unique identifier requirements. Refer to section 1.5 for ASCII string requirements
Mandatory	Required	Required
Notes		

**6.4.3.2.17 Name** The mapping for Name is summarized in Table 101.

**Table 101:** Name mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Name	<b>NVM Spec Property / Field:</b> Controller ID (CNTRLID) <b>NVM</b> <b>Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249

	Redfish/Swordfish	NVMe / NVMe-oF
Type	String	<b>NVM Spec Property Type:</b> 16-bit hex value <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 79:78, IdentifyController data structure
Description	The name of the resource or array member.	
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specification-described requirements. This string value shall be of the 'Name' reserved word format.	
Mandatory	Required	Required
Notes	In Redfish, Name is a read-only field.	Map the CNTLID field to a string with the format: "0xABCD"

**6.4.3.2.18 NVMeControllerProperties.ControllerType** The mapping for NVMe-ControllerProperties.ControllerType is summarized in Table 102.

**Table 102:** NVMeControllerProperties.ControllerType mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.ControllerType	<b>NVM Spec Property / Field:</b> Controller Type (CNTRL_TYPE) <b>NVM Spec: Section:Figure</b> Section 5.15.2.2 (IdentifyController), Figure 249 Byte 111
Type	StorageController.v1_0_0.NVMeControllerType	Integer
Description	This property specifies the type of NVMe Controller.	Controller Type
LongDescription	This property shall specify the type of NVMe Controller.	This field specifies the controller type. A value of 0h indicates that the controller type is not reported.
Mandatory	Required	Required
Notes	This property must be used to specify the type of NVMe Controller. For an IO controller, set to IO.	For IO Controller - value in Identify Controller is '01h'. Return "IO"

**6.4.3.2.19 NVMeControllerProperties.NVMeVersion** The mapping for `NVMeControllerProperties.NVMeVersion` is summarized in Table 103.

**Table 103:** `NVMeControllerProperties.NVMeVersion` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeControllerProperties.NVMeVersion</code>	<b>NVM Spec Property / Field:</b> Version (VER) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	String	<b>NVM Spec Property Type:</b> Maps from register 3.1.2. <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 83:90
Description	The version of the NVMe Base Specification supported.	
LongDescription	This property shall specify the type of NVMe Controller.	
Mandatory	Required when NVMe version is 1.2 or higher.	Required when NVMe version is 1.2 or higher.
Notes		Implementations compliant to revision 1.2 or later of this specification shall report a non-zero value in this field. Map from corresponding value in register 3.1.2 to string as “1.0”, “1.1”, “1.2”, “1.2.1”, “1.3.0”, “1.4.0”, etc.



**6.4.3.2.20 NVMeControllerProperties.NVMeControllerAttributes.ReportsUUIDList**

The mapping for NVMeControllerProperties.NVMeControllerAttributes.ReportsUUIDList is summarized in Table 104.

**Table 104:** NVMeControllerProperties.NVMeControllerAttributes.ReportsUUIDList mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.ReportsUUIDList	<b>NVM Spec</b> <b>Property / Field:</b> Controller Attributes (CTRATT): UUID List (Bit 9) <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (Identify- Controller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 9 of Byte 99:96
Description	Indicates whether or not the controller supports reporting of a UUID list.	
LongDescription	This property shall indicate whether or not the controller supports reporting of a UUID list.	
Mandatory	Optional	Optional
Notes		

**6.4.3.2.21 NVMeControllerProperties.NVMeControllerAttributes.SupportsSQAssociations**

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsSQAssociations is summarized in Table 105.

**Table 105:**

NVMeControllerProperties.NVMeControllerAttributes.SupportsSQAssociations mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsSQAssociations	<b>NVM Spec</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 8 (SQ Associations) <b>NVM</b> <b>Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 8 of Byte 99:96
Description	Indicates whether or not the controller supports SQ Associations.	
LongDescription	This property shall indicate whether or not the controller supports SQ Associations.	
Mandatory	Optional	Optional
Notes		

**6.4.3.2.22 NVMeControllerProperties.NVMeControllerAttributes.ReportsNamespaceGranularity**

The mapping for NVMeControllerProperties.NVMeControllerAttributes.ReportsNamespaceGranularity is summarized in Table 106.

**Table 106:**

NVMeControllerProperties.NVMeControllerAttributes. ReportsNamespaceGranularity mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.ReportsNamespaceGranularity	<b>NVM Spec</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 7 (Namespace Granularity) <b>NVM</b> <b>Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 7 of Byte 99:96
Description	Indicates whether or not the controller supports reporting of Namespace Granularity.	
LongDescription	This property shall indicate whether or not the controller supports reporting of Namespace Granularity.	

---

	Redfish/Swordfish	NVMe / NVMe-oF
Mandatory	Recommended for NVM Drives and more complex devices with NVMe front ends, such as opaque arrays.	Optional
Notes		

---

#### 6.4.3.2.23 NVMeControllerProperties.NVMeControllerAttributes.SupportsReservations

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsReservations is summarized in Table 107.

**Table 107:**

NVMeControllerProperties.NVMeControllerAttributes. ReportsNamespaceGranularity mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsReservations	<b>NVM Spec</b> <b>Property / Field:</b> Optional NVM Command Support (ONCS): Bit 5 <b>NVM Spec:</b> <b>Section:Figure</b> NVMe Base specification 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 5 of Byte 521:520
Description	Indicates whether or not the controller supports namespace reservations.	Indicates whether or not the controller supports namespace reservations.
LongDescription	This property shall indicate whether or not the controller supports namespace reservations to enable two or more hosts to coordinate access to a shared namespace.	

---

	Redfish/Swordfish	NVMe / NVMe-oF
Mandatory	Recommended for NVM Drives and more complex devices with NVMe front ends, such as opaque arrays.	Optional
Notes		If the controller supports reservations then the following commands associated with reservations shall be supported: Reservation Report, Reservation Register, Reservation Acquire, and Reservation Release. Refer to section NVMe Base specification, Section 8.8 for additional requirements.

---

#### 6.4.3.2.24 NVMeControllerProperties.NVMeControllerAttributes.SupportsTrafficBasedKeepAlive

The mapping for NVMeControllerProperties.NVMeControllerAttributes.TrafficBasedKeepAlive is summarized in Table 108.

**Table 108:**

NVMeControllerProperties.NVMeControllerAttributes. TrafficBasedKeepAlive mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsTrafficBasedKeepAlive	<b>NVM Spec:</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 6 (Traffic Based Keep Alive Support – TBKAS) <b>NVM Spec:</b> <b>Section: Figure</b> NVMe 1.4a: Section 5.15.2.2 (Identify-Controller), Figure 249

	Redfish/Swordfish	NVMe / NVMe-oF
Type	Boolean	<b>NVM Spec Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 6 of Byte 99:96
Description	Indicates whether or not the controller supports restarting KeepAlive Timer if traffic is processed from an admin command or IO during KeepAlive Timeout interval.	
LongDescription	This property shall indicate whether or not the controller supports restarting KeepAlive Timer if traffic is processed from an admin command or IO during KeepAlive Timeout interval.	
Mandatory	Required for Ethernet-Attach Drives; required for more complex devices with NVMe front ends, such as opaque arrays.	Optional
Notes	For NVMe SSD Drives: If “Ethernet-Attach for NVMe Drives” feature is advertised, this is required. (This means EnduranceGroups and NVM Sets are supported.)	



---

Redfish/Swordfish	NVMe / NVMe-oF
Table: NVMeControllerProperties.NVMeControllerAttributes. SupportsTrafficBasedKeepAlive mapping	

---

#### 6.4.3.2.25 NVMeControllerProperties.NVMeControllerAttributes.SupportsPredictableLatencyMode

The mapping for NVMeControllerProperties.NVMeControllerAttributes.PredictableLatencyMode is summarized in Table 109.

**Table 109:** NVMeControllerProperties.NVMeControllerAttributes. SupportsPredictableLatencyMode mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.PredictableLatencyMode	<b>NVM Spec:</b> Supports Predictable Latency Mode <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 5 (Predictable Latency Mode) <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (Identify Controller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 5 of Byte 99:96
Description	Indicates whether or not the controller supports Predictable Latency Mode.	
LongDescription	This property shall indicate whether or not the controller supports Predictable Latency Mode.	
Mandatory	Optional	Optional
Notes		

**6.4.3.2.26 NVMeControllerProperties.NVMeControllerAttributes.SupportsEnduranceGroups**

The mapping for NVMeControllerProperties.NVMeControllerAttributes.EnduranceGroups is summarized in Table 110.

**Table 110:**

NVMeControllerProperties.NVMeControllerAttributes.SupportsEnduranceGroups mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsEnduranceGroups	<b>NVM Spec</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 4 (Endurance Groups) <b>NVM</b> <b>Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 4 of Byte 99:96
Description	Indicates whether or not the controller supports Endurance Groups.	
LongDescription	This property shall indicate whether or not the controller supports Endurance Groups.	
Mandatory	Required when EnduranceGroups/Sets are supported.	Optional

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	For NVMe SSD Drives: If “Advanced Features for NVMe Drives” feature is advertised, this is required. (This means EnduranceGroups and NVM Sets are supported.)	

---

**6.4.3.2.27 NVMeControllerProperties.NVMeControllerAttributes.SupportsReadRecoveryLevels**

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsReadRecoveryLevels is summarized in Table 111.

**Table 111:**

NVMeControllerProperties.NVMeControllerAttributes.SupportsReadRecoveryLevels mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsReadRecoveryLevels	<b>NVM Spec:</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 3 (Read Recovery Levels) <b>NVM</b> <b>Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 3 of Byte 99:96
Description	Indicates whether or not the controller supports Read Recovery Levels.	
LongDescription	This property shall indicate whether or not the controller supports Read Recovery Levels.	
Mandatory	Optional	Optional
Notes		

#### 6.4.3.2.28 NVMeControllerProperties.NVMeControllerAttributes.SupportsNVMSets

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsNVMSets is summarized in Table 112.

**Table 112:** NVMeControllerProperties.NVMeControllerAttributes. SupportsNVMSets mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsNVMSets	<b>NVM Spec</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 2 (NVM Sets) <b>NVM</b> <b>Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (Identify- Controller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 2 of Byte 99:96
Description	Indicates whether or not the controller supports NVM Sets.	
LongDescription	This property shall indicate whether or not the controller supports NVM Sets.	
Mandatory	Required when EnduranceGroups/Sets are supported.	Optional

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	For NVMe SSD Drives: If “Advanced Features for NVMe Drives” feature is advertised, this is required. (This means EnduranceGroups and NVM Sets are supported.)	

---

### 6.4.3.2.29 NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOperationalState

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOperationalState is summarized in Table 113.

**Table 113:** NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOperationalState mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOperationalState	<b>NVM Spec</b> <b>Property /</b> <b>Field:</b> Controller Attributes (CTRATT): Bit 1 (Non- Operational Power State Permissive Mode) <b>NVM</b> <b>Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional</b> <b>NVM Spec</b> <b>Identifying</b> <b>Information:</b> Bit 1 of Byte 99:96



Redfish/Swordfish	NVMe / NVMe-oF
<p>Description Indicates whether or not the controller supports exceeding Power of NonOperational State in order to execute controller initiated background operations in a non-operational power state.</p>	
<p>LongDescription This property shall indicate whether or not the controller supports exceeding Power of NonOperational State in order to execute controller initiated background operations in a non-operational power state.</p>	
Mandatory Optional	Optional
Notes	

**6.4.3.2.30 NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId**

The mapping for NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId is summarized in Table 114.

**Table 114:**

NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId	<b>NVM Spec:</b> <b>Property / Field:</b> Controller Attributes (CTRATT): Bit 0 <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.2 (IdentifyCon- troller), Figure 249
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 0 of Byte 99:96
Description	Indicates whether or not the controller supports a 128-bit Host Identifier.	
LongDescription	This property shall indicate whether or not the controller supports a 128-bit Host Identifier.	
Mandatory	Required	Optional
Notes		

**6.4.3.2.31 NVMeControllerProperties.MaxQueueSize** The mapping for NVMeControllerProperties.MaxQueueSize is summarized in Table 115.

**Table 115:** NVMeControllerProperties.ANCharacteristics mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.MaxQueueSize	<b>NVM Spec Property / Field:</b> Maximum Queues Entries Supported (MQES) <b>NVM Spec: Section:Figure</b> NVMe 1.4a; Section 3.1.1 Controller Capabilities; Figure 69
Type	Int64	<b>NVM Spec Property Type: Additional NVM Spec Identifying Information:</b> ByteOffset: Bits 15:00
Description	Indicates the maximum individual queue size that an NVMe IO Controller supports.	
LongDescription	This property shall contain the maximum individual queue entry size supported per queue. This is a zero-based value, where the minimum value is one, indicating two entries. For PCIe, this applies to both submission and completion queues. For NVMe-oF, this applies to only submission queues.	
Mandatory	Implement for more complex devices with NVMe front ends, such as opaque arrays.	Required
Notes		

**6.4.3.2.32 NVMeControllerProperties.ANCharacteristics** The mapping for `NVMeControllerProperties.ANCharacteristics` is summarized in Table 116.

**Table 116:** `NNVMeControllerProperties.ANCharacteristics` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeControllerProperties.ANCharacteristics</code>	
Type	<code>Collection(StorageController.v1_0_0.ANCharacteristics)</code>	
Description	This property contains the combination of ANA type and volume information.	
LongDescription	This property shall contain the combination of ANA type and volume information.	
Mandatory		
Notes		

**6.4.3.2.33 NVMeControllerProperties.ANCharacteristics.AccessState** The mapping for `NVMeControllerProperties.ANCharacteristics.AccessState` is summarized in Table 117.

**Table 117:** `NNVMeControllerProperties.ANCharacteristics.AccessState` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeControllerProperties.ANCharacteristics.AccessState</code>	<b>NVM Spec Property / Field:</b> Asymmetric Namespace Access State <b>NVM Spec Section: Figure</b> NVMe 1.4a; Section 5.14.1.12; Figure 211
Type	<code>StorageController.v1_0_0.ANAAccessState</code>	<b>NVM Spec Property Type: Additional NVM Spec Identifying Information:</b> ByteOffset: Bits 03:00 of Byte 16
Description	Reported ANA Access state.	
LongDescription	This property shall contain the reported ANA Access State.	
Mandatory		
Notes	Available values: Optimized / NonOptimized / Inaccessible / PersistentLoss	

**6.4.3.2.34 NVMeControllerProperties.ANCharacteristics.Volume** The mapping for NVMeControllerProperties.ANCharacteristics.Volume is summarized in Table 118.

**Table 118:** NVMeControllerProperties.ANCharacteristics.Volume mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.ANCharacteristics.Volume	<b>NVM Spec Property / Field:</b> Namespace Identifier X: <b>NVM Spec: Section:Figure</b> NVMe 1.4a; Section 5.14.1.12; Figure 211
Type	Volume.Volume	<b>NVM Spec Property Type: Additional NVM Spec Identifying Information:</b> Bits 35:32, 39:36, ..., ((n*4) + 35):
	((n*4) + 32) - up to “n” namespace identifiers.	
Description	The specified volume.	
LongDescription	This property shall contain a link to the specified volume.	
Mandatory		

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	This field contains the pointer to the namespace for which the access state applies.	The namespace id should be redirected / linked to the corresponding namespace (volume) object with that namespace id. If this set of fields contains multiple namespaces (e.g., a group of namespaces), a unique entry in the ANACharacteristics array should be created for each namespace.

---

#### 6.4.3.2.35 NVMeControllerProperties.NVMeSMARTCriticalWarnings.PRMUnreliable

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.PRMUnreliable is summarized in Table 119.

**Table 119:** NVMeControllerProperties.NVMeSMARTCriticalWarnings.PRMUnreliable mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeSMARTCriticalWarnings.PRMUnreliable	<b>NVM Spec:</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 5 of Byte 00
Description	The Persistent Memory Region has become unreliable.	
LongDescription	This property shall indicate that the Persistent Memory Region has become unreliable. PCI Express memory reads may return invalid data or generate poisoned PCI Express TLP(s). Persistent Memory Region memory writes may not update memory or may update memory with undefined data. The Persistent Memory Region may also have become non-persistent.	



---

	Redfish/Swordfish	NVMe / NVMe-oF
Mandatory	Recommended for NVM Drives; required for more complex devices with NVMe front ends, such as opaque arrays.	

---

**6.4.3.2.36 NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed**

The mapping for `NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed` is summarized in Table 120.

**Table 120:**

`NVMeControllerProperties.NVMeSMARTCriticalWarnings. PowerBackupFailed` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed</code>	<b>NVM Spec</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 4 of Byte 00
Description	Indicates that the volatile memory backup device has failed.	
LongDescription	This property shall indicate that the volatile memory backup device has failed.	
Mandatory	Recommended for NVM Drives. Required for more complex devices with NVMe front ends, such as opaque arrays.	
Notes		

**6.4.3.2.37 NVMeControllerProperties.NVMeSMARTCriticalWarnings.MediaInReadOnly**

The mapping for `NVMeControllerProperties.NVMeSMARTCriticalWarnings.MediaInReadOnly` is summarized in Table 121.

**Table 121:**

`NVMeControllerProperties.NVMeSMARTCriticalWarnings.MediaInReadOnly` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeControllerProperties.NVMeSMARTCriticalWarnings.MediaInReadOnly</code>	<b>NVM Spec:</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 3 of Byte 00
Description	Indicates the media has been placed in read only mode.	
LongDescription	This property shall indicate the media has been placed in read only mode. This is not set when the read-only condition on the media is a result of a change in the write protection state of a namespace.	
Mandatory	Required	
Notes		

**6.4.3.2.38 NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSubsystemDegraded**

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSubsystemDegraded is summarized in Table 122.

**Table 122:**

NVMeControllerProperties.NVMeSMARTCriticalWarnings. OverallSubsystemDegraded mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSubsystemDegraded	<b>NVM Spec</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 2 of Byte 00
Description	Indicates that the NVM subsystem reliability has been compromised.	
LongDescription	This property shall indicate that the NVM subsystem reliability has been compromised.	
Mandatory	Required	
Notes		

**6.4.3.2.39 NVMeControllerProperties.NVMeSMARTCriticalWarnings.SpareCapacityWornOut**

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.SpareCapacityWornOut is summarized in Table 123.

**Table 123:**

NVMeControllerProperties.NVMeSMARTCriticalWarnings. SpareCapacityWornOut mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerProperties.NVMeSMARTCriticalWarnings.SpareCapacityWornOut	NVMeSpareCapacityWornOut <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 0 of Byte 00
Description	Indicates that the available spare capacity has fallen below the threshold.	
LongDescription	This property shall indicate that the available spare capacity has fallen below the threshold.	
Mandatory	Required for NVMe drives, as well as for more complex devices with NVMe front ends, such as opaque arrays.	
Notes		

**6.4.3.2.40 PCIeInterface.PCIeType** The mapping for `PCIeInterface.PCIeType` is summarized in Table 124.

**Table 124:** `PCIeInterface.PCIeType` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>PCIeInterface.PCIeType</code>	N/A
Type	enum ( <code>PCIeDevice.PCIeType</code> )	N/A
Description	The version of the PCIe specification in use by this device.	N/A
LongDescription	This property shall contain the negotiated PCIe interface version in use by this device.	N/A
Mandatory	Required for PCIe attach NVMe Drives; do not implement for ethernet-attach drives. Optional for more complex devices with NVMe front ends, such as opaque arrays.	N/A
Notes	Possible values: Gen1/Gen2/Gen3/Gen4/Gen5	The functionality comes from the underlying implementation and does not originate in the NVMe specs

**6.4.3.2.41 PCIeInterface.MaxPCIeType** The mapping for `PCIeInterface.MaxPCIeType` is summarized in Table 125.

**Table 125:** `PCIeInterface.MaxPCIeType` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>PCIeInterface.MaxPCIeType</code>	N/A
Type	enum ( <code>PCIeDevice.PCIeType</code> )	N/A
Description	The highest version of the PCIe specification supported by this device.	N/A
LongDescription	This property shall contain the maximum PCIe specification that this device supports.	N/A
Mandatory	Required for PCIe attach NVMe Drives; do not implement for ethernet-attach drives.	N/A
Notes	Possible values: <code>Gen1/Gen2/Gen3/Gen4/Gen5</code>	The functionality comes from the underlying implementation and does not originate in the NVMe specs

**6.4.3.2.42 PCIeInterface.LanesInUse** The mapping for `PCIeInterface.LanesInUse` is summarized in Table 126.

**Table 126:** `PCIeInterface.LanesInUse` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>PCIeInterface.LanesInUse</code>	N/A
Type	int64	N/A
Description	The number of PCIe lanes in use by this device.	N/A
LongDescription	This property shall contain the number of PCIe lanes in use by this device, which shall be equal to or less than the <code>MaxLanes</code> property value.	N/A
Mandatory	Required for PCIe attach NVMe Drives; do not implement for ethernet-attach drives.	N/A
Notes		The functionality comes from the underlying implementation and does not originate in the NVMe specs



**6.4.3.2.43 PCIeInterface.MaxLanes** The mapping for `PCIeInterface.LanesInUse` is summarized in Table 127.

**Table 127:** `PCIeInterface.LanesInUse` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>PCIeInterface.LanesInUse</code>	N/A
Type	int64	N/A
Description	The number of PCIe lanes supported by this device.	N/A
LongDescription	This property shall contain the maximum number of PCIe lanes supported by this device.	N/A
Mandatory	Required for PCIe attach NVMe Drives; do not implement for ethernet-attach drives.	N/A
Notes		The functionality comes from the underlying implementation and does not originate in the NVMe specs

**6.4.3.2.44 Ports** The mapping for Ports is summarized in Table 128.

**Table 128:** Ports mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Ports	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	PortCollection.PortCollection	N/A
Description	The link to the collection of ports that exist on the storage controller.	N/A
LongDescription	This property shall contain a link to a resource collection of type PortCollection.	N/A
Mandatory	Do Not Implement for NVMe drives; optional for more complex devices with NVMe front ends, such as opaque arrays.	
Notes		

**6.4.3.2.45 SKU** The mapping for SKU is summarized in Table 129.

**Table 129:** SKU mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	SKU	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Edm.String	N/A
Description	The SKU for this storage controller.	N/A
LongDescription	This property shall contain the stock-keeping unit number for this storage storage controller.	N/A
Mandatory	Do Not Implement	
Notes		

**6.4.3.2.46 SpeedGbps** The mapping for SpeedGbps is summarized in Table 130.

**Table 130:** SpeedGbps mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	SpeedGbps	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Decimal	N/A
Description	The maximum speed of the storage controller's device interface.	N/A
LongDescription	This property shall represent the maximum supported speed of the storage bus interface, in Gbit/s. The specified interface connects the controller to the storage devices, not the controller to a host. For example, SAS bus not PCIe host bus.	N/A
Mandatory	Do Not Implement	
Notes		

**6.4.3.2.47 Status.State** The mapping for `Status.State` is summarized in Table 131.

**Table 131:** `Status.State` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.State</code>	<b>NVM Spec Property / Field:</b> CSTS – Controller Status <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 3.1.6, Figure 79
Type	<code>Resource.State</code> (enum)	<b>NVM Spec Property Type:</b>
Description	The known state of the resource, such as, enabled.	
LongDescription	This property shall indicate whether and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.	
	Mandatory	Mandatory

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values: Enabled / Disabled / StandbyOffline / StandbySpare / InTest / Starting / ABsent / UnavaialableOffline / Deferring / Quiesced / Updating / Qualified	Ready (CSTS.RDY) maps to Enabled, Shutdown (CSTS.SHST) value will tell you if shutdown is in progress or complete (StandbyOffline), ProcessingPaused (CSTS.PP) maps to Deferring. If both Ready and Shutdown are indicated, then the system should indicate StandbyOffline. If both Ready and ProcessingPaused are indicated, then the system should indicate Deferring.

---

**6.4.3.2.48 Status.Health** The mapping for `Status.Health` is summarized in Table 132.

**Table 132:** Status.Health mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Status.Health	<b>NVM Spec Property / Field:</b> CSTS – Controller Status <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 3.1.6, Figure 79 <b>NVM Spec</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Resource.Health	<b>NVM Spec Property Type:</b>
Description	The health state of this resource in the absence of its dependent resources.	
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
Mandatory		
Notes	Possible Values: OK / Warning / Critical	This comes from CSTS Controller Failure Status, and from the SMART / health information log critical warning field.

**6.4.3.2.49 SupportedControllerProtocols** The mapping for SupportedControllerProtocols is summarized in Table 133.

**Table 133:** SupportedControllerProtocols mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	SupportedControllerProtocols	N/A
Type	Collection(Protocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The supported set of protocols for communicating to this storage controller.	
LongDescription	This property shall contain the supported set of protocols for communicating to this storage controller.	
Mandatory		
Notes	This is an array of protocols supported by the StorageController. This can be set to values including, but not limited to, PCIe, RDMA, NVMe-oF, RoCE, RoCEv2, and InfiniBand.	



**6.4.3.2.50 SupportedDeviceProtocols** The mapping for SupportedDeviceProtocols is summarized in Table 134.

**Table 134:** SupportedDeviceProtocols mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	SupportedDeviceProtocols	N/A
Type	Collection(Protocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The protocols that the storage controller can use to communicate with attached devices.	
LongDescription	This property shall contain the set of protocols this storage controller can use to communicate with attached devices.	
Mandatory		
Notes	Do not implement.	

## 6.5 Namespace

The Redfish/Swordfish Volume schema is used to represent an NVM Namespace.

### 6.5.1 Mockup

The following mockup shows a sample representation of the Volume schema used to represent an NVM Namespace.

```
{
  "@Redfish.Copyright": "Copyright 2014-2020 SNIA. All rights reserved.",
  "@odata.id":
  ↪ "/redfish/v1/Storage/NVMe-oF-Subsystem/Volumes/LogicalNamespace1",
  "@odata.type": "#Volume.v1_5_0.Volume",
  "Id": "1",
  "Name": "Namespace 1",
  "LogicalUnitNumber": 1,
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "Identifiers": [{
    "DurableNameFormat": "NGUID",
    "DurableName": "FEDCBA9876543210h"
  }],
  "Capacity": {
    "Data": {
      "ConsumedBytes": 0,
      "AllocatedBytes": 10737418240
    },
    "Metadata": {
      "AllocatedBytes": 536870912
    }
  },
  "CapacitySources": [{
    "@odata.id": "/redfish/v1/Storage/NVMe-oF-
    ↪ Subsystem/Volumes/LogicalNamespace1/CapacitySources/Source1"
  }],
  "NVMeNamespaceProperties": {
    "NamespaceId": "0x014",
    "NamespaceFeatures": {
      "SupportsThinProvisioning": false,

```

```
    "SupportsAtomicTransactionSize": false,  
    "SupportsDeallocatedOrUnwrittenLBError": false,  
    "SupportsNGUIDReuse": false,  
    "SupportsIOPerformanceHints": false  
  },  
  "NumberLBAFormats": 0,  
  "FormattedLBASize": "LBAFormat0Support",  
  "MetadataTransferredAtEndOfDataLBA": false,  
  
  "NVMeVersion": "1.4"  
}  
}
```

### 6.5.2 Property Mapping

**6.5.2.1 BlockSizeBytes** The mapping for `BlockSizeBytes` is summarized in Table 135.

**Table 135:** `BlockSizeBytes` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>BlockSizeBytes</code>	<b>NVM Spec Property / Field:</b> Formatted LBA Size (FLBAS) <b>NVM Spec: Section:Figure</b> 247: byte 26
Type	Int64	
Description	The size, in bytes, of the smallest addressable unit, or block.	
LongDescription	This property shall contain size of the smallest addressable unit of the associated drive or device.	
Mandatory	Required	
Notes		Follow index in 247: Byte 26 (bits 3:0) to the LBA format structure to get the metadata size and LBA data size combination. These combined values are <code>BlockSizeBytes</code> .

**6.5.2.2 Capacity.Data.ConsumedBytes** The mapping for `Capacity.Data.ConsumedBytes` is summarized in Table 136.

**Table 136:** Capacity.Data.ConsumedBytes mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Capacity.Data.ConsumedBytes	<b>NVM Spec Property / Field:</b> Namespace Utilization (NUSE) <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Int64	<b>NVM Spec Property Type:</b> int 64 <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 23:16, Identify Namespace data structure
Description	The number of bytes consumed in this data store for this data type.	The current number of logical blocks allocated in the namespace.
LongDescription	The value shall be the number of logical bytes currently consumed in this data store for this data type.	This field indicates the current number of logical blocks allocated in the namespace. This field is smaller than or equal to the Namespace Capacity. The number of logical blocks is based on the formatted LBA size.
Mandatory	Yes	Yes

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Reporting capacity in bytes is the Redfish and Swordfish standard mechanism. Clients expect the capacity information to be reported consistently for these devices, so the calculation here is to convert the NVMe properties (in blocks) to bytes.	Returned in bytes 23:16 of the Identify Namespace Data Structure (NVM Command Set Specific). Reference NVMe Base Specification section n 5.15.2.1 and figure 247).

**6.5.2.3 Capacity.Data.ProvisionedBytes** The mapping for `Capacity.Data.ProvisionedBytes` is summarized in Table 137.

**Table 137:** `Capacity.Data.ProvisionedBytes` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Capacity.Data.ProvisionedBytes</code>	<b>NVM Spec Property / Field:</b> NVM Capacity (NCAP) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Int64	<b>NVM Spec Property Type:</b> int 64 <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 15:08, Identify Namespace data structure
Description	The maximum number of bytes that can be allocated in this data store for this data type.	The total size of the namespace in logical blocks (LBA 0 through n-1).

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	The value shall be the maximum number of bytes that can be allocated in this data store for this data type.	This field indicates the total size of the namespace in logical bytes. The value is in bytes. A namespace of size n consists of LBA 0 through (n - 1). The number of logical blocks is based on the formatted LBA size. This field is undefined prior to the namespace being formatted.
Mandatory	No	No
Notes	This property is required when issuing a create namespace command. It is also required for “change namespace” when modifying the size of the namespace.	Returned in bytes 07:00 of the Identify Namespace Data Structure (NVM Command Set Specific). Reference NVMe Base Specification section in 5.15.2.1 and figure 247.

**6.5.2.4 Capacity.Data.AllocatedBytes** The mapping for `Capacity.Data.AllocatedBytes` is summarized in Table 138.

**Table 138:** `Capacity.Data.AllocatedBytes` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Capacity.Data.AllocatedBytes</code>	<b>NVM Spec Property / Field:</b> Namespace Size (NSZE) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247

	Redfish/Swordfish	NVMe / NVMe-oF
Type	Int64	<b>NVM Spec Property Type:</b> int 64 <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 07:00, Identify Namespace data structure
Description	The number of bytes currently allocated by the storage system in this data store for this data type.	The total size of the NVM allocated to this namespace.
LongDescription	The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.	The total size of the NVM allocated to this namespace. The value is in bytes. This field shall be supported if the Namespace Management capability (refer to NVMe Base Specification section 8.12) is supported. This field may not correspond to the logical block size multiplied by the Namespace Size field. Due to thin provisioning or other settings (e.g., endurance), this field may be larger or smaller than the Namespace Size reported.
Mandatory	No	No
Notes	Reporting capacity in bytes is the Redfish and Swordfish standard mechanism.	Returned in bytes 63:48 of the Identify Namespace Data Structure (NVM Command Set Specific). Reference NVMe Base Specification section in 5.15.2.1 and figure 247.



**6.5.2.5 Capacity.Metadata** The mapping for `Capacity.Metadata` is summarized in Table 139.

**Table 139:** `Capacity.Metadata.AllocatedBytes` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Capacity.Metadata.*</code>	N/A
Type	Int64	N/A
Description	The number of bytes currently allocated by the storage system in this data store for this data type.	N/A
LongDescription	The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.	N/A
Mandatory	No; not required for NVMe Drives; optional to implement for more complex devices.	No
Notes		Do not return metadata information for NVMe devices. This is included in the overall reported capacity information.

**6.5.2.6 CapacitySources** The mapping for `CapacitySources` is summarized in Table 140.

**Table 140:** CapacitySources mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	CapacitySources	<b>NVM Spec Property / Field:</b> NVM Set Identifier (NVMSETID) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Collection(Capacity.CapacitySource	<b>NVM Spec Property Type:</b> int 64 <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 101:100, Identify Namespace data structure
Description	An array of space allocations to this volume.	The NVM Set in which the namespace is allocated
LongDescription	Fully or partially consumed storage from a source resource. Each entry provides capacity allocation information from a named source resource.	
Mandatory	No	No

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Contains the information about the entity providing capacity (e.g, EnduranceGroup) for this namespace. This property is a collection pointer; each CapacitySource instance contains a CapacitySource object. The CapacitySource contains the overall capacity (in bytes), the types and pointers to the underlying capacity sources.	For NVMe devices that do <i>not</i> implement Endurance Groups and NVM Sets, it is recommended that the CapacitySource not be implemented. For Implementations that do instantiate Endurance Groups and NVM Sets, the capacity source should be implemented as a pointer to the corresponding Endurance Group. (See mockups for examples.)

**6.5.2.7 Description** The mapping for `Description` is summarized in Table 141.

**Table 141:** Description mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Type	String	N/A
Description	The description of this resource.	N/A
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specification-described requirements.	N/A
Mandatory	Yes	N/A

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	In Redfish, Description is a read-only field.	Return the common description: “A Namespace is a quantity of non-volatile memory that may be formatted into logical blocks. When formatted, a namespace of size n is a collection of logical blocks with logical block addresses from 0 to (n-1). NVMe systems can support multiple namespaces.”

**6.5.2.8 DisplayName** The mapping for `DisplayName` is summarized in Table 142.

**Table 142:** `DisplayName` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>DisplayName</code>	N/A
Type	String	N/A
Description	A user-configurable string to name the volume.	N/A
LongDescription	This property shall contain a user-configurable string to name the volume.	N/A
Mandatory	Recommended for NVMe Drives, as well as for more complex devices with NVMe front ends, such as opaque arrays.	N/A

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	This contains an (end) user settable “friendly” name for the namespace. This may map to a property that shows up in the proprietary software, as long as it is configurable by the end-user, and is intended to contain a displayable string.	

**6.5.2.9 Identifiers** The mapping for `Identifiers` is summarized in Table 143.

**Table 143:** Identifiers mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	Namespace Identification Descriptor list
Type	Collection(Resource.Identifier)	A variable length Namespace Identification Descriptor structures
Description	The Durable names for the storage controller.	A list of Namespace Identification Descriptor structures containing Namespace Type, Namespace Identifier Length (NIDL), and Namespace ID (NID).

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain a list of all known durable names for the associated storage controller.	A list of any number of variable length Namespace Identification Descriptor structures that fit into the 4,096 byte Identify payload. All remaining bytes after the namespace identification descriptor structures should be cleared to 0h, and the host shall interpret a Namespace Identifier Descriptor Length (NIDL) value of 0h as the end of the list. The host should ignore any Namespace Identification Descriptor with a Namespace Identifier Type not supported by the host.
Mandatory	No	No
Notes	This is an array of unique identifiers for the NVM Subsystem including Namespace Type and Namespace ID.	Refer to NVMe Base Specification Figure 246 CNS 03h and Figure 251 (Identify – Namespace Identification Descriptor).

**6.5.2.10 Identifiers.DurableName** The mapping for `Identifiers.DurableName` is summarized in Table 144.

**Table 144:** `Identifiers.DurableName` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Identifiers.DurableName</code>	Namespace Identifier (NID)
Type	Variable - see notes	Variable - see notes

	Redfish/Swordfish	NVMe / NVMe-oF
Description	The Durable names for the storage controller.	Durable Namespace Identifier
LongDescription	This property shall contain a list of all known durable names for the Namespace.	A list of globally unique values assigned to the Namespace when the Namespace is created. Values remain fixed throughout the life of the Namespace and are preserved across Namespace and Controller operations (e.g., Controller Level Reset, Namespace format, etc.).
Mandatory	No	No
Notes	This is an array of unique identifiers for the Namespace. Type and length of descriptor are in the corresponding Identifiers.DurableNameFormat property.	This is an array of unique identifiers for the NVM Namespace. Type and length of the descriptor are in the corresponding Namespace Identifier Type (NIDT). Refer to NVMe Base Specification Figure 246 CNS 03h and Figure 251 - Figure 251 Byte NID of Identify – Namespace Identification Descriptor.

**6.5.2.11 Identifiers.DurableNameFormat** The mapping for `Identifiers.DurableNameFormat` is summarized in Table 145.

**Table 145:** `Identifiers.DurableNameFormat` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Identifiers.DurableNameFormat</code>	Namespace Identifier Type (NIDT)
Type	Int64	Int64

	Redfish/Swordfish	NVMe / NVMe-oF
Description	The Durable names for the storage controller.	The Namespace Identifier data type and length.
LongDescription	This property shall contain a list of the types for all known durable names for the associated storage controller. The type determines the length of the corresponding Namespace ID	the data type contained in the Namespace Identifier field and the length of that type as defined in the NVMe Base Specification Figure 251 - Identify (Namespace Identification Descriptor) byte 00. Allowed values are: 1 = an 8-byte IEEE Extended Unique Identifier . 2 = a 10-byte Namespace Globally Unique Identifier. 3 = an 8-byte Namespace UUID
Mandatory	No	No
Notes	This is an array of types for the unique identifiers for the NVM Subsystem. Values may be 'EUI64', 'NGUID', or 'UUID'.	Refer to NVMe Base Specification Figure 246 CNS 03h and Figure 251 - Figure 251 (NIDT) of Identify – Namespace Identification Descriptor.

**6.5.2.12 InitializeMethod** The mapping for `InitializeMethod` is summarized in Table 146.

**Table 146:** InitializeMethod mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	InitializeMethod	N/A
Type	Volume.InitializeMethod (enum)	



	Redfish/Swordfish	NVMe / NVMe-oF
Description	Indicates the Initialization Method used for this volume. If InitializeMethod is not specified, the InitializeMethod should be Foreground.	
LongDescription	This property shall indicate the initialization method used for this volume. If InitializeMethod is not specified, the InitializeMethod should be Foreground. This value reflects the most recently used Initialization Method, and may be changed using the Initialize Action.	
Mandatory	Recommended for NVMe Drives, as well as for more complex devices with NVMe front ends, such as opaque arrays.	
Notes	Available values: Fast / Slow	Not in NVMe Specification today.

**6.5.2.13 Links.Drives** The mapping for `Links.Drives` is summarized in Table 147.

**Table 147:** `Links.Drives` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.Drives</code>	
Type	<code>Collection(Drive.Drive)</code>	

	Redfish/Swordfish	NVMe / NVMe-oF
Description	An array of the drives to be used by the volume	
LongDescription	This parameter shall contain an array of the drives to be used by the volume.	
Mandatory	Required for NVMe Drives. Optional, not recommended for more complex devices with an NVMe front end, such as opaque arrays; for these configurations the mapping is to the underlying storage pool, rather than to drives.	Redfish construct. Not in the NVMe spec.
Notes	This array shall contain links to the drive object for this namespace.	

**6.5.2.14 LogicalUnitNumber** The mapping for `LogicalUnitNumber` is summarized in Table 148.

**Table 148:** `LogicalUnitNumber` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>LogicalUnitNumber</code>	N/A
Type	<code>Int64</code>	N/A
Description	Indicates the host-visible <code>LogicalUnitNumber</code> assigned to this Volume.	

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain host-visible LogicalUnitNumber assigned to this Volume. This property shall only be used when in a single connect configuration and no StorageGroup configuration is used.	N/A
Mandatory	No	No
Notes	Do not use with NVMe devices. This is represented more correctly with (NVMeNamespaceProperties).Namespaceld.	Do not implement.

**6.5.2.15 MaxBlockSizeBytes** The mapping for MaxBlockSizeBytes is summarized in Table 149.

**Table 149:** MaxBlockSizeBytes mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	MaxBlockSizeBytes	<b>NVM Spec Property / Field:</b> Formatted LBA Size (FLBAS) <b>NVM Spec: Section:Figure</b> 247: byte 26
Type	Int64	
Description	The size, in bytes, of the smallest addressable unit, or block.	
LongDescription	This property shall contain size of the smallest addressable unit of the associated drive or device.	

	Redfish/Swordfish	NVMe / NVMe-oF
Mandatory	Recommended to not implement; however, if implemented this should have the same value as BlockSizeBytes.	
Notes		Follow index in 247: Byte 26 (bits 3:0) to the LBA format structure to get the metadata size and LBA data size combination. These combined values are BlockSizeBytes.

**6.5.2.16 Name** The mapping for Name is summarized in Table 150.

**Table 150:** Name mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Name	<b>NVM Spec Property / Field:</b> Namespace ID (NSID) <b>NVM Spec: Section:Figure</b> NVMe 1.4a
Type	String	
Description	The name of the resource or array member.	N/A

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specification-described requirements. This string value shall be of the 'Name' reserved word format.	To determine the active NSIDs for a particular controller, the host may follow either of the following methods: 1. Issue an Identify command with the CNS field cleared to 0h for each valid NSID (based on the Number of Namespaces value (i.e., MNAM field or NN field) in the Identify Controller data structure). If a non-zero data structure is returned for a particular NSID, then that is an active NSID; or 2. Issue an Identify command with a CNS field set to 2h to retrieve a list of up to 1,024 active NSIDs. If there are more than 1,024 active NSIDs, continue to issue Identify commands with a CNS field set to 2h until all active NSIDs are retrieved.
Mandatory	Yes	N/A
Notes	In Redfish, Name is a read-only field.	Map the NSID field to a string with the format: "0xABCD"

**6.5.2.17 NVMeNamespaceProperties.NamespaceId** The mapping for `NVMeNamespaceProperties.NamespaceId` is summarized in Table 151.

**Table 151:** NVMeNamespaceProperties.NamespaceId mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeNamespaceProperties.NamespaceId	Namespace Identifier (NSID)
Type	String	8-byte value
Description	The NVMe Namespace Identifier for this namespace.	An identifier used by a controller to provide access to a namespace.
LongDescription	This property shall contain the NVMe Namespace Identifier for this namespace. This property shall be a hex value. Namespace identifiers are not durable and do not have meaning outside the scope of the NVMe subsystem. NSID 0x0, 0xFFFFFFFF, 0xFFFFFFFFE are special purpose values.	An identifier used by a controller to provide access to a namespace or the name of the field in the SQE that contains the namespace identifier.
Mandatory	Yes	Yes

	Redfish/Swordfish	NVMe / NVMe-oF
Notes		<p>To determine the active NSIDs for a particular controller, the host may follow either of the following methods: 1. Issue an Identify command with the CNS field cleared to 0h for each valid NSID (based on the Number of Namespaces value (i.e., MNAM field or NN field) in the Identify Controller data structure). If a non-zero data structure is returned for a particular NSID, then that is an active NSID; or 2. Issue an Identify command with a CNS field set to 2h to retrieve a list of up to 1,024 active NSIDs. If there are more than 1,024 active NSIDs, continue to issue Identify commands with a CNS field set to 2h until all active NSIDs are retrieved.</p>

**6.5.2.18 NVMeNamespaceProperties.IsShareable** The mapping for `NVMeNamespaceProperties.IsShareable` is summarized in Table 152.

**Table 152:** NVMeNamespaceProperties.IsShareable mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeNamespaceProperties.IsShareable	<b>NVM Spec Property / Field:</b> Namespace Multi-path I/O and Namespace Sharing Capabilities (NMIC) <b>NVM Spec: Section: Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Boolean	<b>NVM Spec Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 0 of Byte 30
Description	Indicates the namespace is shareable.	Specifies multi-path I/O and namespace sharing capabilities of the namespace.
LongDescription	This property shall indicate whether the namespace is shareable.	If set to '1', then the namespace may be attached to two or more controllers in the NVM subsystem concurrently (i.e., may be a shared namespace). Bits 7:1 are reserved. Bit 0, if cleared to '0', indicates the namespace is a private namespace and is able to be attached to only one controller at a time.
Mandatory	No	No



	Redfish/Swordfish	NVMe / NVMe-oF
Notes		Returned in byte 30 of the Namespace Features (NSFEAT) of the of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247).

#### 6.5.2.19 NVMeNamespaceProperties.NamespaceFeatures.SupportsThinProvisioning

The mapping for NVMeNamespaceProperties.NamespaceFeatures.SupportsThinProvisioning is summarized in Table 153.

**Table 153:**

NVMeNamespaceProperties.NamespaceFeatures. SupportsThinProvisioning mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeNamespaceProperties.NamespaceFeatures.SupportsThinProvisioning	<b>NVM Spec</b> <b>Property / Field:</b> THINP <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 0 of Byte 24

	Redfish/Swordfish	NVMe / NVMe-oF
Description	This property indicates whether or not the NVMe Namespace supports thin provisioning.	Indicates that the namespace supports thin provisioning
LongDescription	This property shall indicate whether or not the NVMe Namespace supports thin provisioning. Specifically, the namespace capacity reported may be less than the namespace size.	if set to '1' indicates that the namespace supports thin provisioning. If cleared to '0' indicates that thin provisioning is not supported. Refer to NVMe Base Specification section 6.1.7 for details on the usage of this field.
Mandatory	Yes	Yes
Notes		Returned in byte 24, bit 0 of the Namespace Features (NSFEAT) of the of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247).

#### 6.5.2.20 NVMeNamespaceProperties.NamespaceFeatures.SupportsDeallocatedOrUnwrittenLBEError

The mapping for NVMeNamespaceProperties.NamespaceFeatures.SupportsDeallocatedOrUnwrittenLBEError is summarized in Table 154.

**Table 154:** NVMeNamespaceProperties.NamespaceFeatures.SupportsDeallocatedOrUnwrittenLbError mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeNamespaceProperties.NamespaceFeatures.SupportsDeallocatedOrUnwrittenLbError	<b>Property / Field:</b> DAE <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM</b> <b>Spec Identifying</b> <b>Information:</b> Bit 2 of Byte 24
Description	This property indicates that the controller supports deallocated or unwritten logical block error for this namespace.	Indicates that the controller supports the Deallocated or Unwritten Logical Block error for this namespace.

Redfish/Swordfish	NVMe / NVMe-oF
<p data-bbox="304 383 1038 506">LongDescription This property shall indicate that the controller supports deallocated or unwritten logical block error for this namespace.</p>	<p data-bbox="1038 383 1286 1249">If set to '1' indicates that the controller supports the Deallocated or Unwritten Logical Block error for this namespace. If cleared to '0', then the controller does not support the Deallocated or Unwritten Logical Block error for this namespace. Refer to NVMe Base Specification section 6.7.1.1</p>
<p data-bbox="304 1256 504 1290">Mandatory Yes</p>	<p data-bbox="1038 1256 1114 1290">Yes</p>
<p data-bbox="304 1312 379 1346">Notes</p>	<p data-bbox="1038 1312 1286 1870">Returned in byte 24, bit 2 of the Namespace Features (NSFEAT) of the of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247.</p>

### 6.5.2.21 NVMeNamespaceProperties.NamespaceFeatures.SupportsNGUIDReuse

The mapping for `NVMeNamespaceProperties.NamespaceFeatures.SupportsNGUIDReuse` is summarized in Table 155.

**Table 155:** `NVMeNamespaceProperties.NamespaceFeatures.SupportsNGUIDReuse` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeNamespaceProperties.NamespaceFeatures.SupportsNGUIDReuse</code>	<b>NVM Spec Property</b> <b>Field:</b> UIDREUSE <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Boolean	<b>NVM Spec Property</b> <b>Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 3 of Byte 24
Description	This property indicates that the namespace supports the use of an NGUID (namespace globally unique identifier) value.	Indicates if the value in the NGUID field and the value in the EUI64 field for this namespace may be reused by the controller for a new namespace created after this namespace is deleted.

Redfish/Swordfish	NVMe / NVMe-oF
<p>LongDescription This property shall indicate that the namespace supports the use of an NGUID (namespace globally unique identifier) value.</p> <p>Mandatory Yes</p>	<p>If set to '1' indicates that the value in the NGUID field for this namespace, if non-zero, is never reused by the controller and that the value in the EUI64 field for this namespace, if non-zero, is never reused by the controller. If cleared to '0', then the NGUID value may be reused and the EUI64 value may be reused by the controller for a namespace created after this namespace is deleted. This bit shall be cleared to '0' if both NGUID and EUI64 fields are cleared to 0h. Refer to NVMe Base Specification, section 7.11.</p> <p>Yes</p>

	Redfish/Swordfish	NVMe / NVMe-oF
Notes		Returned in byte 24, bit 3 of the Namespace Features (NSFEAT) of the of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247).

#### 6.5.2.22 NVMeNamespaceProperties.NamespaceFeatures.SupportsAtomicTransactionSize

The mapping for NVMeNamespaceProperties.NamespaceFeatures.SupportsAtomicTransactionSize is summarized in Table 156.

**Table 156:**

NVMeNamespaceProperties.NamespaceFeatures. SupportsAtomicTransactionSize mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeNamespaceProperties.NamespaceFeatures.SupportsAtomicTransactionSize	<b>NVMe Spec:</b> <b>Property / Field:</b> OPTPERF NVM <b>Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247

	Redfish/Swordfish	NVMe / NVMe-oF
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 4 of Byte 24
Description	Indicates whether or not the NVM fields for Namespace preferred write granularity (NPWG), write alignment (NPWA), deallocate granularity (NPDG), deallocate alignment (NPDA) and optimal write size (NOWS) are defined for this namespace and should be used by the host for I/O optimization.	Indicates support for the fields NPWG, NPWA, NPDG, NPDA, and NOWS for this namespace; and optimal Write Size field in NVM Sets Attributes Entry



Redfish/Swordfish	NVMe / NVMe-oF
<p><b>LongDescription</b> This property shall indicate whether or not the NVM fields for Namespace preferred write granularity (NPWG), write alignment (NPWA), deallocate granularity (NPDG), deallocate alignment (NPDA) and optimal write size (NOWS) are defined for this namespace and should be used by the host for I/O optimization.</p>	<p>If set to '1' indicates that the fields NAWUN, NAWUPF, and NACWU are defined for this namespace and should be used by the host for this namespace instead of the AWUN, AWUPF, and ACWU fields in the Identify Controller data structure. If cleared to '0', then the controller does not support the fields NAWUN, NAWUPF, and NACWU for this namespace. In this case, the host should use the AWUN, AWUPF, and ACWU fields defined in the Identify Controller data structure in Figure 247. Refer to NVMe Base Specification section 6.4.</p>
<p>Mandatory Yes</p>	<p>Yes</p>

	Redfish/Swordfish	NVMe / NVMe-oF
Notes		Returned in byte 24, bit 4 of the Namespace Features (NSFEAT) of the of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247).

### 6.5.2.23 NVMeNamespaceProperties.NamespaceFeatures.SupportsIOPerformanceHints

The mapping for `NVMeNamespaceProperties.NamespaceFeatures.SupportsIOPerformanceHints` is summarized in Table 157.

**Table 157:**

`NVMeNamespaceProperties.NamespaceFeatures.SupportsIOPerformanceHints` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeNamespaceProperties.NamespaceFeatures.SupportsIOPerformanceHints</code>	<b>Property / Field:</b> NSABP <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247

	Redfish/Swordfish	NVMe / NVMe-oF
Type	Boolean	<b>NVM Spec</b> <b>Property Type:</b> Single bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 1 of Byte 24
Description	Indicates that the Namespace Atomic Write Unit Normal (NAWUN), Namespace Atomic Write Unit Power Fail (NAWUPF), and Namespace Atomic Compare and Write Unit (NACWU) fields are defined for this namespace and should be used by the host for this namespace instead of the controller-level properties AWUN, AWUPF, and ACWU.	indicates whether or not the fields NAWUN, NAWUPF, and NACWU are defined for this namespace and should be used by the host for this namespace instead of the AWUN, AWUPF, and ACWU fields in the Identify Controller data structure.

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	<p>This property shall indicate that the Namespace Atomic Write Unit Normal (NAWUN), Namespace Atomic Write Unit Power Fail (NAWUPF), and Namespace Atomic Compare and Write Unit (NACWU) fields are defined for this namespace and should be used by the host for this namespace instead of the controller-level properties AWUN, AWUPF, and ACWU.</p>	<p>If set to '1' indicates that the fields NAWUN, NAWUPF, and NACWU are defined for this namespace and should be used by the host for this namespace instead of the AWUN, AWUPF, and ACWU fields in the Identify Controller data structure. If cleared to '0', then the controller does not support the fields NAWUN, NAWUPF, and NACWU for this namespace. In this case, the host should use the AWUN, AWUPF, and ACWU fields defined in the Identify Controller data structure in NVMe Base Specification Figure 247. Refer to NVMe Base Specification section 6.4.</p>
Mandatory	Yes	Yes

	Redfish/Swordfish	NVMe / NVMe-oF
Notes		Returned in byte 24, bit 1 of the Namespace Features (NSFEAT) of the of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247).

**6.5.2.24 NVMeNamespaceProperties.NumberLBAFormats** The mapping for `NVMeNamespaceProperties.NumberLBAFormats` is summarized in Table 158.

**Table 158:** 158: `NVMeNamespaceProperties.NumberLBAFormats` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeNamespaceProperties.NumberLBAFormats</code>	<b>NVM Spec Property / Field:</b> Number of LBA Formats (NLBAF) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Int64	Type:** Int64 <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 25

	Redfish/Swordfish	NVMe / NVMe-oF
Description	The number of LBA data size and metadata size combinations supported by this namespace. The value of this property is between 0 and 16.	The number of supported LBA data size and metadata size combinations supported by the namespace.
LongDescription	This property shall contain the number of LBA data size and metadata size combinations supported by this namespace. The value of this property is between 0 and 16. LBA formats with an index set beyond this value will not be supported.	This property shall contain the number of LBA formats allocated in order starting with 0 and packed sequentially. This is a 0's based value. The maximum number of LBA formats that may be indicated as supported is 16. The supported LBA formats are indicated in bytes 128 to 191 in this data structure. The LBA Format fields with an index beyond the value set in this field are invalid and not supported. LBA Formats that are valid, but not currently available may be indicated by setting the LBA Data Size for that LBA Format to 0h.
Mandatory	Yes	Yes

	Redfish/Swordfish	NVMe / NVMe-oF
Notes		Returned in byte 25 (Number of LBA Formats) of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 & figure 247).

**6.5.2.25 NVMeNamespaceProperties.FormattedLBASize** The mapping for NVMe-`NamespaceProperties.FormattedLBASize` is summarized in Table 159.

**Table 159:** NVMeNamespaceProperties.FormattedLBASize mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeNamespaceProperties.FormattedLBASize	<b>NVM Spec Property / Field:</b> Formatted LBA Size (FLBAS) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Int64	Type:** Int64 <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 26
Description	The LBA data size and metadata size combination that the namespace has been formatted with.	The LBA data size and metadata size combination that the namespace has been formatted with.

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain the LBA data size and metadata size combination that the namespace has been formatted with. This is a 4-bit data structure.	This field indicates the LBA data size & metadata size combination that the namespace has been formatted with (refer to section 5.23). Bits 3:0 indicates one of the 16 supported LBA Formats indicated in this data structure.
Mandatory	Yes	Yes
Notes		Returned in byte 26 (Formatted LBA Size), bits 3:0 of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247.

#### 6.5.2.26 NVMeNamespaceProperties.MetadataTransferredAtEndOfDataLBA

The mapping for `NVMeNamespaceProperties.MetadataTransferredAtEndOfDataLBA` is summarized in Table 160.



**Table 160:** NVMeNamespaceProperties.MetadataTransferredAtEndOfDataLBA mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeNamespaceProperties.MetadataTransferredAtEndOfDataLBA	<b>NVMe Spec:</b> <b>Property:</b> / <b>Field:</b> Metadata transferred at end of LBA <b>NVM Spec:</b> <b>Section:</b> <b>Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Boolean	Type:** Bit (bool) <b>Additional NVM Spec Identifying Information:</b> Bit 4 of Byte 26
Description	This property indicates whether or not the metadata is transferred at the end of the LBA creating an extended data LBA.	This property indicates whether or not the metadata is transferred at the end of the data LBA.
LongDescription	This property shall indicate whether or not the metadata is transferred at the end of the LBA creating an extended data LBA.	If set to '1' indicates that metadata is transferred at the end of the data LBA, creating an extended data LBA. Bit 4 if cleared to '0' indicates that all of the metadata for a command is transferred as a separate contiguous buffer of data.

	Redfish/Swordfish	NVMe / NVMe-oF
Mandatory	Yes	Yes
Notes		Returned in byte 26 (Formatted LBA Size), bit 4 of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247. Bit 4 is not applicable when there is no metadata.

**6.5.2.27 NVMeNamespaceProperties.NVMeVersion** The mapping for `NVMeNamespaceProperties.NVMeVersion` is summarized in Table 161.

**Table 161:** `NVMeNamespaceProperties.NVMeVersion` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeNamespaceProperties.NVMeVersion</code>	<code>Version (VER)</code>
Type	String	Int64
Description	The version of the NVMe Base Specification supported.	This property shall contain the version of the NVMe Base Specification supported.

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription		Indicates the major, minor, and tertiary version of the NVM Express base specification that the controller implementation supports. Valid versions of the specification are: 1.0, 1.1, 1.2, 1.2.1, 1.3, 1.4, and 2.0.
Mandatory	Yes	Yes
Notes		Returned in bytes 83:80 of the Identify Controller data structure - CNS 01h (reference NVMe Base Specification section 5.15.2.2 and figure 249).

**6.5.2.28 OptimumIOSizeBytes** The mapping for `OptimumIOSizeBytes` is summarized in Table 162.

**Table 162:** `OptimumIOSizeBytes` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>OptimumIOSizeBytes</code>	<b>NVM Spec Property / Field:</b> Namespace Optimal Write Size (NOWS) <b>NVM Spec:</b> <b>Section:Figure</b> Figure 247: Bytes 73:72
Type	Int64	
Description	The size in bytes of this Volume's optimum IO size.	N/A

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain the optimum IO size to use when performing IO on this volume. For logical disks, this is the stripe size. For physical disks, this describes the physical sector size.	This field indicates the size in logical blocks for optimal write performance for this namespace. This is a 0's based value.
Mandatory	Recommended for implementations with Endurance Groups and NVM Sets.	
Notes		Convert from blocks to bytes.

**6.5.2.29 ProvisioningPolicy** The mapping for `ProvisioningPolicy` is summarized in Table 163.

**Table 163:** `OptimumIOSizeBytes` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>ProvisioningPolicy</code>	<b>NVM Spec Property / Field:</b> Identify Namespace / THINP <b>NVM Spec:</b> <b>Section:Figure 247:</b> Byte 24, Bit 0
Type	enum ( <code>DataStorageLoSCapabilities.ProvisioningPolicy</code> )	
Description	This property specifies the volume's storage allocation, or provisioning policy.	N/A
LongDescription	This property shall specify the volume's supported storage allocation policy.	

	Redfish/Swordfish	NVMe / NVMe-oF
Mandatory	Recommended for implementations that support thin provisioning.	Figure 247: Byte 24, Bit 0 indicates thin provisioning support for the namespace
Notes	possible values: Fixed / Thin	

**6.5.2.30 Status.State** The mapping for `Status.state` is summarized in Table 164.

**Table 164:** `Status.State` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.State</code>	Enable (EN)
Type	<code>Resource.State</code> (enum)	Boolean
Description	The known state of the resource, such as, enabled.	Indicates if the controller is in 'enabled' state.

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall indicate whether and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.	When set to '1', then the controller shall process commands based on Submission Queue Tail doorbell writes. When cleared to '0', then the controller shall not process commands nor post completion queue entries to Completion Queues. When this bit transitions from '1' to '0', the controller is reset (i.e., a Controller Reset). That reset deletes all I/O Submission Queues and I/O Completion Queues, resets the Admin Submission Queue and Completion Queue, and brings the hardware to an idle state.
Mandatory	Yes	Yes
Notes	Possible values: Enabled / Disabled / StandbyOffline / StandbySare / InTest / Starting / Absent / UnavailableOffline / Deferring / Quiesced / Updating / Qualified	Reference Controller Configuration (CC), offset 14h, bit 00 of the NVMe Base Specification (figure 78)

**6.5.2.31 Status.Health** The mapping for `Status.Health` is summarized in Table 165.

**Table 165:** Status.Health mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Status.Health	Controller Fatal Status (CSTS.CFS)
Type	Resource.Health	Bit
Description	The health state of this resource in the absence of its dependent resources.	Indicates if the controller is able to communicate with host software via completion queue entries in the Admin Completion Queue or I/O Completion Queues.

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	If the controller has a serious error condition and is unable to communicate with host software via completion queue entries in the Admin Completion Queue or I/O Completion Queues, then the controller may set the Controller Fatal Status (CSTS.CFS) bit to '1' (refer to section 3.1.6). This indicates to host software that a serious error condition has occurred. When this condition occurs, host software should attempt to reset and then re-initialize the controller. The Controller Fatal Status condition is not indicated with an interrupt. If host software experiences timeout conditions and/or repeated errors, then host software should consult the Controller Fatal Status (CSTS.CFS) bit to determine if a more serious error has occurred.
Mandatory	Yes	Yes
Notes	Possible Values: OK / Warning / Critical	Reference Figure 222 (NVM Subsystem Hardware Error Event Codes) bit 09h of the NVMe Base Specification.



**6.5.2.32 Status.HealthRollup** The mapping for `Status.HealthRollup` is summarized in Table 166.

**Table 166:** `Status.HealthRollup` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.HealthRollup</code>	N/A
Type	<code>Resource.Health</code>	N/A
Description	The overall health state from the view of this resource.	N/A
LongDescription	This property shall represent the health state of the resource and its dependent resources. The values shall conform to those defined in the Redfish Specification.	N/A
Mandatory	No	N/A
Notes	Do not use for Namespace. There are no dependent resources.	Do not implement.

**6.5.2.33 StorageGroups** The mapping for StorageGroups is summarized in Table 167.

**Table 167:** StorageGroups mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	StorageGroups	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec: Section:Figure</b> N/A
Type	StorageGroupCollection.StorageGroupCollection	N/A
Description	An array of references to Storage Groups that includes this volume.	N/A
LongDescription	The value of this property shall contain references to all storage groups that include this volume.	N/A
Mandatory	Do Not Implement	
Notes		

**6.5.2.34 WriteCachePolicy** The mapping for `WriteCachePolicy` is summarized in Table 168.

**Table 168:** `WriteCachePolicy` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>WriteCachePolicy</code>	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec: Section:Figure</b> N/A
Type	<code>StorageGroupCollection.StorageGroupCollection</code>	N/A
Description	Indicates the write cache policy setting for the Volume	N/A
LongDescription	This property shall contain a boolean indicator of the write cache policy for the Volume.	N/A
Mandatory	Recommended.	
Notes	Possible Values: <code>WriteThrough</code> , <code>ProtectedWriteBack</code> , <code>UnprotectedWriteBack</code> , <code>Off</code> . Set to “Off” when write cache disabled; set to other values when enabled.	

## 6.6 Endurance Group

The Redfish/Swordfish Storage Pool schema is used to represent an NVM Endurance Group.

### 6.6.1 Mockup

The following mockup shows a sample representation of the Storage Pool schema used to represent an NVM Endurance Group.

```
{
  "@Redfish.Copyright": "Copyright 2015-2020 SNIA. All rights reserved.",
  "@odata.id":
  ↪ "/redfish/v1/Storage/FabricAttachArray/StoragePools/EnduranceGroup1",
  "@odata.type": "#StoragePool.v1_4_0.StoragePool",
  "Id": "1",
  "Name": "Endurance Group 1",
  "Description": "Single Endurance Group",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },

  "NVMeEnduranceGroupProperties": {
    "EndGrpLifetime": {
      "PercentUsed": 0,
      "EnduranceEstimate": 0,
      "DataUnitsRead": 0,
      "DataUnitsWritten": 0,
      "MediaUnitsWritten": 0,
      "HostReadCommandCount": 0,
      "HostWriteCommandCount": 0,
      "MediaAndDataIntegrityErrorCount": 0,
      "ErrorInformationLogEntryCount": 0
    }
  },

  "Capacity": {
    "Data": {
      "AllocatedBytes": 10995116277760,
      "ConsumedBytes": 10995116277760
    }
  },
}
```

```
"CapacitySources": [{  
  "@odata.id": "/red-  
  ↪ fish/v1/Storage/FabricAttachArray/StoragePools/EnduranceGroup1/CapacitySources/Source1"  
}]  
}
```

### 6.6.2 Property Mapping

**6.6.2.1 AllocatedPools** The mapping for `AllocatedPools` is summarized in Table 169.

**Table 169:** `AllocatedPools` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>AllocatedPools</code>	NVM Set List
Type	<code>StoragePoolCollection.StoragePoolCollection</code>	
Description	A reference to the collection of storage pools allocated from this storage pool.	A list of NVM sets
LongDescription	The value of this property shall contain a reference to the collection of storage pools allocated from this storage pool.	An ordered list by NVM Set Identifier, starting with the first NVM Set Identifier supported by the NVM subsystem that is equal to or greater than the NVM Set Identifier indicated in <code>CDW11.NVMSETID</code> . The NVM Set List describes the attributes for each NVM Set in the list based on the NVM Set Attributes Entry
Mandatory	Required.	Optional (if NVM sets are supported)
Notes	Contains a pointer to the NVM Set allocated from this Endurance Group.	Reference Figure 250

**6.6.2.2 Capacity.Data.AllocatedBytes** The mapping for `Capacity.Data.AllocatedBytes` is summarized in Table 170.

**Table 170:** `Capacity.Data.AllocatedBytes` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Capacity.Data.AllocatedBytes</code>	The Total Endurance Group Capacity. Just the “Total Endurance Group Capacity” in the Endurance Group Log. See 5.14.1.9 + TP 4009
Type	Int64	
Description	The number of bytes currently allocated by the storage system in this data store for this data type.	
LongDescription	The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.	
Mandatory	Required for NVMe Drives.	
Notes		Note: This is not in 1.4a because TP 4009 was not integrated.

**6.6.2.3 Capacity.Data.ConsumedBytes** The mapping for `Capacity.Data.ConsumedBytes` is summarized in Table 171.

**Table 171:** `Capacity.Data.ConsumedBytes` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Capacity.Data.ConsumedBytes</code>	The Consumed (allocated to NVM Sets) Endurance Group Capacity. Just the “Total Endurance Group Capacity” (TEGCAP) minus the Unallocated Endurance Group Capacity (UEGCAP) in the Endurance Group Log. See 5.14.1.9 + TP 4009
Type	Int64	
Description	The number of bytes consumed in this data store for this data type.	
LongDescription	The value shall be the number of logical bytes currently consumed in this data store for this data type.	
Mandatory	Required for NVMe Drives.	
Notes		Note: This is not in 1.4a because TP 4009 was not integrated.



**6.6.2.4 CapacitySources** The mapping for `CapacitySources` is summarized in Table 172.

**Table 172:** `CapacitySources` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>CapacitySources</code>	NVM Set List
Type	<code>Collection(Capacity.CapacitySource)</code>	
Description	An array of space allocations to this volume.	A list of NVM Sets
LongDescription	Fully or partially consumed storage from a source resource. Each entry provides capacity allocation information from a named source resource.	An ordered list by NVM Set Identifier, starting with the first NVM Set Identifier supported by the NVM subsystem that is equal to or greater than the NVM Set Identifier indicated in <code>CDW11.NVMSETID</code> . The NVM Set List describes the attributes for each NVM Set in the list based on the NVM Set Attributes Entry
Mandatory	Required for NVMe Drives.	Optional (if NVM sets are supported)
Notes	Contains the information about the providing capacity (e.g, <code>EnduranceGroup</code> ) for this namespace.	Reference Figure 250

**6.6.2.5 CapacitySources@odata.count** The mapping for CapacitySources@odata.count is summarized in Table 173.

**Table 173:** CapacitySources@odata.count mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	CapacitySources@odata.count	
Type	(odata property)int64	
Description	Count of the number of items in the CapacitySources array.	
LongDescription		
Mandatory	Required	
Notes		This should be the same as the number of NVM Sets in the endurance group.

**6.6.2.6 Description** The mapping for `Description` is summarized in Table 174.

**Table 174:** Description mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Type	String	N/A
Description	The description of this resource.	
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specification-described requirements.	
Mandatory		
Notes	In Redfish, <code>Description</code> is a read-only field.	Return the common description: “An Endurance Group consists of zero or more NVM Sets. Endurance Groups divide the media into distinct wear-leveling domains.”

**6.6.2.7 Links.OwningStorageResource** The mapping for `Links.OwningStorageResource` is summarized in Table 175.

**Table 175:** `Links.OwningStorageResource` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.OwningStorageResource</code>	N/A
Type	<code>Storage.Storage</code>	N/A
Description	A pointer to the Storage resource that owns or contains this StoragePool.	N/A
LongDescription	This shall be a pointer to the Storage resource that owns or contains this StoragePool.	N/A
Mandatory	Required.	N/A
Notes	Contains a pointer to the NVM Subsystem that contains this Endurance Group.	A pointer to the owning subsystem - this is a Swordfish construct which points back to the subsystem

**6.6.2.8 Name** The mapping for Name is summarized in Table 176.

**Table 176:** Name mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Name	Endurance Group ID NVMe 1.4a: Section 5.14,1,9, Get Log Page - Endurance Group Log
Type	String	16-bit value
Description	The name of the resource or array member.	
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specification-described requirements. This string value shall be of the 'Name' reserved word format.	
Mandatory		
Notes	In Redfish, Name is a read-only field.	The Endurance Group Identifier is specified in the Log Specific Identifier field in Command Dword 11 of the Get Log Page command. Map the Endurance Group ID field to a string with the format: "0xABCD"

**6.6.2.9 NVMeProperties.NVMePoolType** The mapping for `NVMeProperties.NVMePoolType` is summarized in Table 177.

**Table 177:** `NVMeProperties.NVMePoolType`

	Redfish/Swordfish	NVMe / NVMe-oF
Property	StoragePool.NVMePoolType	
Type	Enum	
Description	Indicates whether the StoragePool is used as an EnduranceGroup or an NVMeSet.	
LongDescription	This property shall indicate whether the StoragePool is used as an EnduranceGroup or an NVMeSet.	
Mandatory	Required	
Notes	Set as “EnduranceGroup”	

**6.6.2.10 NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent**

The mapping for `NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent` is summarized in Table 178.

**Table 178:** `NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent</code>	“Percentage Used” in the Endurance Group Log. See 5.14.1.9
Type	Decimal %	
Description	The percentage of reads and writes that are predicted to be available for the media.	
LongDescription	This property shall contain an indicator of the percentage of life remaining in the drive’s media.	
Mandatory	Required	
Notes		Inverse of “Percentage Used” in the Endurance Group Log. See 5.14.1.9 . Subtract the percentage used from 100% to report this value.

**6.6.2.11 NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed** The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed` is summarized in Table 179.

**Table 179:** `NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed</code>	'PercentUsed' in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	A vendor-specific estimate of the percent life used for the endurance group based on the actual usage and the manufacturer prediction of NVM life.	
LongDescription	This property shall contain A vendor-specific estimate of the percent life used for the endurance group based on the actual usage and the manufacturer prediction of NVM life. A value of 100 indicates that the estimated endurance of the NVM in the Endurance Group has been consumed, but may not indicate an NVM failure. According to the NVMe and JEDEC specs, the value is allowed to exceed 100. Percentages greater than 254 shall be represented as 255.	
Mandatory	Required	
Notes		



**6.6.2.12 NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate**

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate` is summarized in Table 180.

**Table 180:** `NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate</code>	“EnduranceEstimate” in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains an estimate of the total number of data bytes that may be written to the Endurance Group over the lifetime of the Endurance Group assuming a write amplification of 1.	
LongDescription	This property shall contain an estimate of the total number of data bytes that may be written to the Endurance Group over the lifetime of the Endurance Group assuming a write amplification of 1. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates endurance estimates are unsupported.	
Mandatory	Required	
Notes		

**6.6.2.13 NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead**

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead` is summarized in Table 181.

**Table 181:** `NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead</code>	
Type	Int64	
Description	The property contains the total number of data units read from this endurance group.	
LongDescription	The property shall contain the total number of data units read from this endurance group. This value does not include controller reads due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.	
Mandatory	Required	
Notes		

**6.6.2.14 NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten**

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten` is summarized in Table 182.

**Table 182:** `NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten</code>	<code>DataUnitsWritten</code> in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	The property contains the total number of data units written from this endurance group.	
LongDescription	The property shall contain the total number of data units written from this endurance group. This value does not include controller writes due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.	
Mandatory	Required	
Notes		

### 6.6.2.15 NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten` is summarized in Table 183.

**Table 183:** `NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten</code>	<code>MediaUnitsWritten</code> in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	The property contains the total number of data units written from this endurance group.	
LongDescription	The property shall contain the total number of data units written from this endurance group. This value includes host and controller writes due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.	
Mandatory	Required	
Notes		

### 6.6.2.16 NVMeEnduranceGroupProperties.EndGrpLifetime.HostReadCommandCount

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.HostReadCommandCount` is summarized in Table 184.

**Table 184:** `NVMeEnduranceGroupProperties.EndGrpLifetime.HostReadCommandCount` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.HostReadCommandCount</code>	"Host Read Commands" in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains the number of read commands completed by all controllers in the NVM subsystem for the Endurance Group.	
LongDescription	This property shall contain the number of read commands completed by all controllers in the NVM subsystem for the Endurance Group. For the NVMe command set, the is the number of compare commands and read commands.	
Mandatory	Required	
Notes		

### 6.6.2.17 NVMeEnduranceGroupProperties.EndGrpLifetime.HostWriteCommandCount

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.HostWriteCommandCount` is summarized in Table 185.

**Table 185:** `NVMeEnduranceGroupProperties.EndGrpLifetime.HostWriteCommandCount` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.HostWriteCommandCount</code>	“HostWriteCommandCount” in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains the number of write commands completed by all controllers in the NVM subsystem for the Endurance Group.	
LongDescription	This property shall contain the number of write commands completed by all controllers in the NVM subsystem for the Endurance Group. For the NVM command set, the is the number of compare commands and write commands.	
Mandatory	Required	
Notes		

### 6.6.2.18 NVMeEnduranceGroupProperties.EndGrpLifetime.MediaAndDataIntegrityErrorCount

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.MediaAndDataIntegrityErrorCount` is summarized in Table 186.

**Table 186:** `NVMeEnduranceGroupProperties.EndGrpLifetime.MediaAndDataIntegrityErrorCount` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.MediaAndDataIntegrityErrorCount</code>	“MediaAndDataIntegrityErrors” in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains the number of occurrences where the controller detected an unrecovered data integrity error for the Endurance Group.	
LongDescription	This property shall contain the number of occurrences where the controller detected an unrecovered data integrity error for the Endurance Group. Errors such as uncorrectable ECC, CRC checksum failure, or LBA tag mismatch are included in this field.	
Mandatory	Required	
Notes		

**6.6.2.19 NVMeEnduranceGroupProperties.EndGrpLifetime.ErrorInformationLogEntryCount**

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.ErrorInformationLogEntryCount` is summarized in Table 187.

**Table 187:** `NVMeEnduranceGroupProperties.EndGrpLifetime.ErrorInformationLogEntryCount` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.ErrorInformationLogEntryCount</code>	“Number of Error Information Log Entries” in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains the number of error information log entries over the life of the controller for the endurance group.	
LongDescription	This property shall contain the number of error information log entries over the life of the controller for the endurance group.	
Mandatory	Required	
Notes		



**6.6.2.20 NVMeSetProperties.SetIdentifier** The mapping for NVMeSetProperties.SetIdentifier is summarized in Table 188.

**Table 188:** NVMeSetProperties.SetIdentifier

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSetProperties.SetIdentifier	<b>NVM Spec Property / Field:</b> NVMSETID <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	String	<b>NVM Spec Property Type:</b> 16-bit value <b>Additional</b> <b>NVM Spec Identifying</b> <b>Information:</b> ByteOffset: 01:00
Description	A 16-bit hex value that contains the NVMe Set identifier.	
LongDescription	This property shall contain a 16-bit hex value that contains the NVMe Set identifier. The NVMe Set identifier is unique within a subsystem. Reserved values include 0.	
Mandatory	Do Not Implement.	
Notes	Do not implement NVMeSetProperties as part of an EnduranceGroup.	

**6.6.2.21 NVMeSetProperties.OptimalWriteSizeBytes** The mapping for NVMeSetProperties.OptimalWriteSizeBytes is summarized in Table 189.

**Table 189:** NVMeSetProperties.OptimalWriteSizeBytes mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSetProperties.OptimalWriteSizeBytes	<b>NVM Spec Property / Field:</b> OptimalWriteSize <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	Int64	<b>NVM Spec Property Type:</b> Bytes <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 15:12
Description	This property contains the Optimal Write Size in Bytes for this NVMe Set.	
LongDescription	This property shall contain the Optimal Write Size in Bytes for this NVMe Set.	
Mandatory	Do Not Implement.	
Notes	Do not implement NVMeSetProperties as part of an EnduranceGroup.	

**6.6.2.22 NVMeSetProperties.EnduranceGroupIdentifier** The mapping for `NVMeSetProperties.EnduranceGroupIdentifier` is summarized in Table 190.

**Table 190:** `NVMeSetProperties.EnduranceGroupIdentifier` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeSetProperties.EnduranceGroupIdentifier</code>	<b>NVM Spec Property / Field:</b> <code>EnduranceGroupIdentifier</code> <b>NVM Spec Section:</b> <b>Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	String	<b>NVM Spec Property Type:</b> 2 bytes <b>Additional NVM Spec Identifying Information:</b> <code>ByteOffset: 03:02</code>
Description	A 16-bit hex value that contains the endurance group identifier.	
LongDescription	This property shall contain a 16-bit hex value that contains the endurance group identifier. The endurance group identifier is unique within a subsystem. Reserved values include 0.	
Mandatory	Do Not Implement.	
Notes	Do not implement <code>NVMeSetProperties</code> as part of an <code>EnduranceGroup</code> .	

**6.6.2.23 NVMeSetProperties.Random4kReadTypicalNanoSeconds** The mapping for `NVMeSetProperties.Random4kReadTypicalNanoSeconds` is summarized in Table 191.

**Table 191:** `NVMeSetProperties.Random4kReadTypicalNanoSeconds` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeSetProperties.Random4kReadTypicalNanoSeconds</code>	<b>NVM Spec Property / Field:</b> Random 4 KiB Read Typical <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	Int64	<b>NVM Spec Property Type:</b> 4 bytes <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 11:08
Description	Indicates the typical time to complete a 4k read in 100 nano-second units when the NVM Set is in a Predictable Latency Mode Deterministic Window and there is 1 outstanding command per NVM Set.	
LongDescription	This property shall contain the typical time to complete a 4k read in 100 nano-second units when the NVM Set is in a Predictable Latency Mode Deterministic Window and there is 1 outstanding command per NVM Set.	
Mandatory	Do Not Implement.	

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes		Do not implement NVMeSetProperties as part of an EnduranceGroup.

---

**6.6.2.24 Status.Health** The mapping for `Status.Health` is summarized in Table 192.

**Table 192:** `Status.Health` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.Health</code>	N/A
Type	<code>Resource.Health</code>	N/A
Description	The health state of this resource in the absence of its dependent resources.	
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
Mandatory		Do not implement
Notes	Possible Values: OK / Warning / Critical	There is not a clear mapping for health of an Endurance Group. Do not implement this property.

**6.6.2.25 Status.State** The mapping for `Status.State` is summarized in Table 193.

**Table 193:** `Status.State` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.State</code>	N/A
Type	<code>Resource.State</code> (enum)	N/A
Description	The known state of the resource, such as, enabled.	
LongDescription	This property shall indicate whether and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.	
Mandatory		Do not implement

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values: Enabled / Disabled / StandbyOffline / StandbySare / InTest / Starting / ABsent / UnavaialableOffline / Deferring / Quiesced / Updating / Qualified	There is not a clear mapping for State of an Endurance Group. Do not implement this property.

---



## 6.7 NVM Set

The Redfish/Swordfish Storage Pool schema is used to represent an NVM Set.

### 6.7.1 Mockup

The following mockup shows a sample representation of the Storage Pool schema used to represent an NVM Set.

```
{
  "@Redfish.Copyright": "Copyright 2015-2020 SNIA. All rights reserved.",
  "@odata.id": "/redfish/v1/Storage/FabricAttachArray/StoragePools/NVMeSet1",
  "@odata.type": "#StoragePool.v1_4_0.StoragePool",
  "Id": "1",
  "Name": "Set 1",
  "Description": "First Set",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "NVMeSetProperties": {
    "SetIdentifier": "0x1F",
    "EnduranceGroupIdentifier": "0x1",
    "Random4kReadTypicalNanoSeconds": 34534345348,
    "UnallocatedNVMeNamespaceCapacityBytes": 5497558138880,
    "OptimalWriteSizeBytes": 512
  },
  "Capacity": {
    "Data": {
      "AllocatedBytes": 10995116277760,
      "ConsumedBytes": 5497558138880
    }
  },
  "AllocatedVolumes": {
    "@odata.id": "/redfish/v1/Storage/FabricAttachArray/StoragePools/NVMeSet1/AllocatedVolumes"
  }
}
```

## 6.7.2 Property Mapping

**6.7.2.1 AllocatedVolumes** The mapping for `AllocatedVolumes` is summarized in Table 194.

**Table 194:** `AllocatedVolumes` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>AllocatedVolumes</code>	<b>NVM Spec Property / Field: NVM Spec: Section:Figure</b>
Type	<code>VolumeCollection.VolumeCollection</code>	
Description	A reference to the collection of volumes allocated from this storage pool.	
LongDescription	The value of this property shall contain a reference to the collection of volumes allocated from this storage pool.	
Mandatory	Required.	
Notes	A pointer to the set of namespaces allocated from this NVM Set.	The allocated volumes contains pointers to the allocated volumes objects. These are the set of namespaces created from this NVM Set.

**6.7.2.2 Capacity.Data.AllocatedBytes** The mapping for Name is summarized in Table 195

**Table 195:** Capacity.Data.AllocatedBytes mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Capacity.Data.AllocatedBytes	<b>NVM Spec Property / Field:</b> Total NVM Set Capacity <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	Int64	<b>NVM Spec Property Type:</b> bytes <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 31:16 for Total NVM Set Capacity
Description	The number of bytes currently allocated by the storage system in this data store for this data type.	
LongDescription	The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.	
Mandatory	Required	
Notes		

**6.7.2.3 Capacity.Data.ConsumedBytes** The mapping for Capacity.Data.ConsumedBytes is summarized in Table 196.

**Table 196:** Capacity.Data.ConsumedBytes mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Capacity.Data.ConsumedBytes	<b>NVM Spec Property / Field:</b> Total NVM Set Capacity, Unallocated NVM Set Capacity <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	Int64	<b>NVM Spec Property Type:</b> bytes <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 31:16 for Total NVM Set Capacity
Byte 47:32 for Unallocated NVM Set Capacity.		
Description	The maximum number of bytes that can be allocated in this data store for this data type.	
LongDescription	The value shall be the maximum number of bytes that can be allocated in this data store for this data type.	
Mandatory	Required	
Notes	This is calculated as “Total NVM Set Capacity” - “Unallocated NVM Set Capacity”.	

**6.7.2.4 CapacitySources** The mapping for `CapacitySources` is summarized in Table 197.

**Table 197:** `CapacitySources` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	CapacitySources	
Type	Collection(Capacity.CapacitySource)	
Description	An array of space allocations to this volume.	
LongDescription	Fully or partially consumed storage from a source resource. Each entry provides capacity allocation information from a named source resource.	
Mandatory	Recommended to not implement for NVMe Drives.	
Notes	Contains the information about the providing capacity (e.g, memory) for this namespace.	

**6.7.2.5 CapacitySources@odata.count** The mapping for CapacitySources@odata.count is summarized in Table 198.

**Table 198:** CapacitySources@odata.count mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	CapacitySources@odata.count	
Type	(odata property)int64	
Description	Count of the number of items in the CapacitySources array.	
LongDescription		
Mandatory	Do not implement for NVMe Drives.	
Notes		

**6.7.2.6 Description** The mapping for `Description` is summarized in Table 199.

**Table 199:** Description mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Description	<b>NVM Spec Property / Field:</b> N/A
Type	String	N/A
Description	The description of this resource.	See note below.
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specification-described requirements.	
Mandatory		
Notes	In Redfish, <code>Description</code> is a read-only field.	Return the common description: “An NVM Set is a collection of NVM that is separate (logically and potentially physically) from NVM in other NVM Sets. One or more namespaces may be created within an NVM Set and those namespaces inherit the attributes of the NVM Set. A namespace is wholly contained within a single NVM Set and shall not span more than one NVM Set.”

**6.7.2.7 Links.OwningStorageResource** The mapping for `Links.OwningStorageResource` is summarized in Table 200.

**Table 200:** `Links.OwningStorageResource` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.OwningStorageResource</code>	
Type	<code>Storage.Storage</code>	
Description	A pointer to the Storage resource that owns or contains this StoragePool.	
LongDescription	This shall be a pointer to the Storage resource that owns or contains this StoragePool.	
Mandatory	Required.	
Notes	Contains a pointer to the NVM Subsystem that contains this NVM Set.	



**6.7.2.8 Name** The mapping for Name is summarized in Table 201**Table 201:** Name mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Name	<b>NVM Spec Property / Field:</b> NVMSETID <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	String	<b>NVM Spec Property Type:</b> 16-bit value <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 01:00
Description	The name of the resource or array member.	
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specification-described requirements. This string value shall be of the 'Name' reserved word format.	
Mandatory	Required	
Notes	In Redfish, Name is a read-only field.	Map the NVMSETID field to a string with the format: "0xABCD"

**6.7.2.9 NVMeProperties.NVMePoolType** The mapping for `NVMeProperties.NVMePoolType` is summarized in Table 202.

**Table 202:** `NVMeProperties.NVMePoolType`

	Redfish/Swordfish	NVMe / NVMe-oF
Property	StoragePool.NVMePoolType	
Type	Enum	
Description	Indicates whether the StoragePool is used as an EnduranceGroup or an NVMeSet.	
LongDescription	This property shall indicate whether the StoragePool is used as an EnduranceGroup or an NVMeSet.	
Mandatory	Required	
Notes	Set as "NVMeSet"	

### 6.7.2.10 NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent

The mapping for NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent is summarized in Table 203.

**Table 203:** NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent	Do not implement in the Endurance Group Log. See 5.14.1.9
Type	Decimal %	
Description	The percentage of reads and writes that are predicted to be available for the media.	
LongDescription	This property shall contain an indicator of the percentage of life remaining in the drive's media.	
Mandatory	Do Not Implement.	
Notes		Do not implement NVMeEndurance-GroupProperties as part of an NVM Set.

**6.7.2.11 NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed** The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed` is summarized in Table 204.

**Table 204:** `NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed</code>	'PercentUsed' in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	A vendor-specific estimate of the percent life used for the endurance group based on the actual usage and the manufacturer prediction of NVM life.	
LongDescription	This property shall contain A vendor-specific estimate of the percent life used for the endurance group based on the actual usage and the manufacturer prediction of NVM life. A value of 100 indicates that the estimated endurance of the NVM in the Endurance Group has been consumed, but may not indicate an NVM failure. According to the NVMe and JEDEC specs, the value is allowed to exceed 100. Percentages greater than 254 shall be represented as 255.	
Mandatory	Do Not Implement.	
Notes	Do not implement <code>NVMeEnduranceGroupProperties</code> as part of an NVM Set.	

**6.7.2.12 NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate**

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate` is summarized in Table 205.

**Table 205:** `NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate</code>	<code>EnduranceEstimate</code> in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains an estimate of the total number of data bytes that may be written to the Endurance Group over the lifetime of the Endurance Group assuming a write amplification of 1.	
LongDescription	This property shall contain an estimate of the total number of data bytes that may be written to the Endurance Group over the lifetime of the Endurance Group assuming a write amplification of 1. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates endurance estimates are unsupported.	
Mandatory	Do Not Implement.	
Notes		Do not implement <code>NVMeEnduranceGroupProperties</code> as part of an NVM Set.

**6.7.2.13 NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead**

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead` is summarized in Table 206.

**Table 206:** `NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead</code>	
Type	Int64	
Description	The property contains the total number of data units read from this endurance group.	
LongDescription	The property shall contain the total number of data units read from this endurance group. This value does not include controller reads due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.	
Mandatory	Do Not Implement.	
Notes		Do not implement <code>NVMeEndurance-GroupProperties</code> as part of an NVM Set.

**6.7.2.14 NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten**

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten` is summarized in Table 207.

**Table 207:** `NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten</code>	"DataUnitsWritten" in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	The property contains the total number of data units written from this endurance group.	
LongDescription	The property shall contain the total number of data units written from this endurance group. This value does not include controller writes due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.	
Mandatory	Do Not Implement.	
Notes	Do not implement <code>NVMeEnduranceGroupProperties</code> as part of an NVM Set.	

### 6.7.2.15 NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten` is summarized in Table 208.

**Table 208:** `NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten</code>	<code>MediaUnitsWritten</code> in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	The property contains the total number of data units written from this endurance group.	
LongDescription	The property shall contain the total number of data units written from this endurance group. This value includes host and controller writes due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.	
Mandatory	Do Not Implement.	
Notes		Do not implement <code>NVMeEnduranceGroupProperties</code> as part of an NVM Set.



**6.7.2.16 NVMeEnduranceGroupProperties.EndGrpLifetime.HostReadCommandCount**

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.HostReadCommandCount` is summarized in Table 209.

**Table 209:**

NVMeEnduranceGroupProperties.EndGrpLifetime.HostReadCommandCount mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.HostReadCommandCount</code>	“Host Read Commands” in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains the number of read commands completed by all controllers in the NVM subsystem for the Endurance Group.	
LongDescription	This property shall contain the number of read commands completed by all controllers in the NVM subsystem for the Endurance Group. For the NVM command set, the is the number of compare commands and read commands.	
Mandatory	Do Not Implement.	
Notes		Do not implement <code>NVMeEnduranceGroupProperties</code> as part of an NVM Set.

**6.7.2.17 NVMeEnduranceGroupProperties.EndGrpLifetime.HostWriteCommandCount**

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.HostWriteCommandCount` is summarized in Table 210.

**Table 210:**

`NVMeEnduranceGroupProperties.EndGrpLifetime.HostWriteCommandCount` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.HostWriteCommandCount</code>	“HostWriteCommandCount” in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains the number of write commands completed by all controllers in the NVM subsystem for the Endurance Group.	
LongDescription	This property shall contain the number of write commands completed by all controllers in the NVM subsystem for the Endurance Group. For the NVM command set, the is the number of compare commands and write commands.	
Mandatory	Do Not Implement.	
Notes		Do not implement <code>NVMeEnduranceGroupProperties</code> as part of an NVM Set.

**6.7.2.18 NVMeEnduranceGroupProperties.EndGrpLifetime.MediaAndDataIntegrityErrorCount**

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.MediaAndDataIntegrityErrorCount` is summarized in Table 211.

**Table 211:**

`NVMeEnduranceGroupProperties.EndGrpLifetime.MediaAndDataIntegrityErrorCount` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.MediaAndDataIntegrityErrorCount</code>	<code>MediaAndDataIntegrityErrorCount</code> “Media and Data Integrity Errors” in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains the number of occurrences where the controller detected an unrecovered data integrity error for the Endurance Group.	
LongDescription	This property shall contain the number of occurrences where the controller detected an unrecovered data integrity error for the Endurance Group. Errors such as uncorrectable ECC, CRC checksum failure, or LBA tag mismatch are included in this field.	
Mandatory	Do Not Implement.	
Notes		Do not implement <code>NVMeEnduranceGroupProperties</code> as part of an NVM Set.

**6.7.2.19 NVMeEnduranceGroupProperties.EndGrpLifetime.ErrorInformationLogEntryCount**

The mapping for `NVMeEnduranceGroupProperties.EndGrpLifetime.ErrorInformationLogEntryCount` is summarized in Table 212.

**Table 212:**

`NVMeEnduranceGroupProperties.EndGrpLifetime.ErrorInformationLogEntryCount` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeEnduranceGroupProperties.EndGrpLifetime.ErrorInformationLogEntryCount</code>	“Number of Error Information Log Entries” in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains the number of error information log entries over the life of the controller for the endurance group.	
LongDescription	This property shall contain the number of error information log entries over the life of the controller for the endurance group.	
Mandatory	Do Not Implement.	
Notes		Do not implement <code>NVMeEnduranceGroupProperties</code> as part of an NVM Set.

**6.7.2.20 NVMeSetProperties.SetIdentifier** The mapping for `NVMeSetProperties.SetIdentifier` is summarized in Table 213.

**Table 213:** NVMeSetProperties.SetIdentifier

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSetProperties.SetIdentifier	<b>NVM Spec Property / Field:</b> NVMSETID <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	String	<b>NVM Spec Property Type:</b> 16-bit value <b>Additional</b> <b>NVM Spec Identifying</b> <b>Information:</b> ByteOffset: 01:00
Description	A 16-bit hex value that contains the NVMe Set identifier.	
LongDescription	This property shall contain a 16-bit hex value that contains the NVMe Set identifier. The NVM Set identifier is unique within a subsystem. Reserved values include 0.	
Mandatory	Required	
Notes		Return as hex value as described in the Swordfish schema.

**6.7.2.21 NVMeSetProperties.OptimalWriteSizeBytes** The mapping for NVMeSet-Properties.OptimalWriteSizeBytes is summarized in Table 214.

**Table 214:** NVMeSetProperties.OptimalWriteSizeBytes mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSetProperties.OptimalWriteSizeBytes	<b>NVM Spec Property / Field:</b> OptimalWriteSize <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	Int64	<b>NVM Spec Property Type:</b> Bytes <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 15:12
Description	This property contains the Optimal Write Size in Bytes for this NVMe Set.	
LongDescription	This property shall contain the Optimal Write Size in Bytes for this NVMe Set.	
Mandatory	Required	
Notes		

**6.7.2.22 NVMeSetProperties.EnduranceGroupIdentifier** The mapping for `NVMeSetProperties.EnduranceGroupIdentifier` is summarized in Table 215.

**Table 215:** `NVMeSetProperties.EnduranceGroupIdentifier` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeSetProperties.EnduranceGroupIdentifier</code>	<b>NVM Spec Property / Field:</b> <code>EnduranceGroupIdentifier</code> <b>NVM Spec Section:</b> Figure NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	String	<b>NVM Spec Property Type:</b> 2 bytes <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 03:02
Description	A 16-bit hex value that contains the endurance group identifier.	
LongDescription	This property shall contain a 16-bit hex value that contains the endurance group identifier. The endurance group identifier is unique within a subsystem. Reserved values include 0.	
Mandatory	Required	
Notes		

**6.7.2.23 NVMeSetProperties.Random4kReadTypicalNanoSeconds** The mapping for `NVMeSetProperties.Random4kReadTypicalNanoSeconds` is summarized in Table 216.

**Table 216:** `NVMeSetProperties.Random4kReadTypicalNanoSeconds` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeSetProperties.Random4kReadTypicalNanoSeconds</code>	<b>NVM Spec Property / Field:</b> Random 4 KiB Read Typical <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	Int64	<b>NVM Spec Property Type:</b> 4 bytes <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 11:08
Description	Indicates the typical time to complete a 4k read in 100 nano-second units when the NVM Set is in a Predictable Latency Mode Deterministic Window and there is 1 outstanding command per NVM Set.	
LongDescription	This property shall contain the typical time to complete a 4k read in 100 nano-second units when the NVM Set is in a Predictable Latency Mode Deterministic Window and there is 1 outstanding command per NVM Set.	
Mandatory	Required	



---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes		Convert from 100 nanosecond units to nanosecond units.

---

**6.7.2.24 NVMeSetProperties.UnallocatedNVMNamespaceCapacityBytes** The mapping for `NVMeSetProperties.UnallocatedNVMNamespaceCapacityBytes` is summarized in Table 217.

**Table 217:** `NVMeSetProperties.Random4kReadTypicalNanoSeconds` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NVMeSetProperties.UnallocatedNVMNamespaceCapacityBytes</code>	<b>NVM Spec Property / Field:</b> Random 4 KiB Read Typical <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	Int64	<b>NVM Spec Property Type:</b> 4 bytes <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 47:32
Description	Indicates the unallocated capacity of the NVMe Set in bytes.	
LongDescription	This property shall contain the unallocated capacity of the NVMe Set in bytes.	
Mandatory	Required	
Notes	Convert from 100 nanosecond units to nanosecond units.	

**6.7.2.25 Status.State** The mapping for `Status.State` is summarized in Table 218.

**Table 218:** Status.State mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Status.State	<b>NVM Spec Property / Field:</b> N/A
Type	Resource.State (enum)	N/A
Description	The known state of the resource, such as, enabled.	
LongDescription	This property shall indicate whether and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.	
Mandatory		Do not implement.

---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values: Enabled / Disabled / StandbyOffline / StandbySpare / InTest / Starting / Absent / UnavailableOffline / Deferring / Quiesced / Updating / Qualified	There is not a clear mapping for State of an NVM Set. Do not implement this property.

---

**6.7.2.26 Status.Health** The mapping for `Status.Health` is summarized in Table 219.

**Table 219:** `Status.Health` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.Health</code>	<b>NVM Spec Property / Field:</b> N/A
Type	<code>Resource.Health</code>	N/A
Description	The health state of this resource in the absence of its dependent resources.	
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
Mandatory		Do not implement.
Notes	Possible Values: OK / Warning / Critical	There is not a clear mapping for health of an NVM Set. Do not implement this property.

## 6.8 Drive

The Redfish/Swordfish Drive schema represent the physical attributes of an NVMe drive object.

### 6.8.1 Mockup

The following mockup shows a sample representation of the Volume schema used to represent an NVM Namespace.

```
{
  "@odata.id": "/redfish/v1/Chassis/SimplestNVMeSSD/Drives/SimplestNVMeSSD",
  "@odata.type": "#Drive.v1_9_0.Drive",
  "IndicatorLED": "Lit",
  "Model": "ST9146802SS",
  "Revision": "S20A",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  },
  "CapacityBytes": 899527000000,
  "FailurePredicted": false,
  "Protocol": "NVMe",
  "MediaType": "SSD",
  "Manufacturer": "Contoso",
  "SerialNumber": "72D0A037FRD26",
  "PartNumber": "SG0GP8811253178M02GJA00",
  "Identifiers": [{
    "DurableNameFormat": "NAA",
    "DurableName": "500003942810D13A"
  }],
  "CapableSpeedGbs": 12,
  "NegotiatedSpeedGbs": 12,
  "Links": {
    "Volumes": [{
      "@odata.id": "/redfish/v1/Systems/Sys-
      ↪ 1/Storage/SimplestNVMeSSD/Volumes/SimpleNamespace"
    }]
  },
  "Actions": {
    "#Drive.Reset": {
      "target": "/red-
      ↪ fish/v1/Chassis/SimplestNVMeSSD/Drives/SimplestNVMeSSD/Actions/Drive.Reset"
```

```
    }  
  }  
}
```

### **6.8.2 Property Mapping**

**6.8.2.1 Actions.#Drive.Reset** The mapping for `Actions.#Drive.Reset` is summarized in Table 220.

**Table 220:** `Actions.#Drive.Reset` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Actions.#Drive.Reset</code>	<b>NVM Spec Property / Field:</b> Shutdown Notification (SHN) <b>NVM Spec: Sec- tion:Figure</b> Figure 78: Offset 14h, Bits 15:14
Type	Action (Special form of POST)	
Description	This action resets this drive.	
LongDescription	This action shall reset this drive.	
Mandatory	Required for NVMe Drives	



---

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	This action has a mandatory property of “ResetType”, which can be any of On/ForceOff/GracefulShutdown/GracefulRestart/Nmi/ForceRestart/ForceOn/PushPowerButton/	Usage: A normal NVM shutdown maps to GracefulShutdown; Subsystem Reset maps to ForceRestart; abrupt Subsystem Shutdown maps to ForceOff. If an implementation that supports the functionality, then they may implement PowerCycle.

---

**6.8.2.2 Actions.#Drive.SecureErase** The mapping for Actions.#Drive.SecureErase is summarized in Table 221.

**Table 221:** Actions.#Drive.SecureErase mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Actions.#Drive.SecureErase	<b>NVM Spec Property / Field:</b> Sanitize Operation <b>NVM Spec: Section:Figure</b> NVM Base Specification 1.4a: Section 9 “Admin Command Set”: Figure 141: Opcodes for Admin Commands - NVM Command Set Specific NVM Base Specification 1.4a: Section 5.24 Sanitize Command NVM Base Specification 1.4a: Section 8.15 Sanitize Operations NVM Base Specification 1.4a: Annex A “Sanitize Operation Considerations (Informative)”
Type	Action (Special form of POST)	NVMe Administrative command
Description	This action securely erases the contents of the drive.	The sanitize administrative command operation makes all user data previously written to the device inaccessible.

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This action shall securely erase the drive.	The Sanitize command is used to start a sanitize operation or to recover from a previously failed sanitize operation. The sanitize operation types that may be supported are Block Erase, Crypto Erase, and Overwrite. All sanitize operations are processed in the background (i.e., completion of the Sanitize command does not indicate completion of the sanitize operation)
Mandatory	Yes	No
Notes	The action parameter SanitizationType supported are: BlockErase, CryptographicErase, and Overwrite. When Overwrite is used, OverwritePasses must also be specified.	Maps to sanitize. Implementation can support any variant.

**6.8.2.3 Assembly.BinaryDataURI** The mapping for `Assembly.BinaryDataURI` is summarized in Table 222.

**Table 222:** `Assembly.BinaryDataURI` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Assembly.BinaryDataURI</code>	<b>NVMe-MI Spec Property / Field:</b> Vital Product Data (VPD) <b>NVM Spec:</b> <b>Section:Figure</b> NVMe-MI: Section 9.2

	Redfish/Swordfish	NVMe / NVMe-oF
Type	String	
Description	The URI at which to access an image of the assembly information.	
LongDescription	This property shall contain the URI at which to access an image of the assembly information, using the Redfish protocol and authentication methods. The Service provides this URI for the download of the OEM-specific binary image of the assembly data. An HTTP GET from this URI shall return a response payload of MIME type application/octet-stream. If the service supports it, an HTTP PUT to this URI shall replace the binary image of the assembly.	
Mandatory	Recommended	
Notes		Use to map binary blob via NVMe MI to the VPD.

**6.8.2.4 BlockSizeBytes** The mapping for `BlockSizeBytes` is summarized in Table 223.

**Table 223:** BlockSizeBytes mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	BlockSizeBytes	<b>NVM Spec Property / Field:</b> Formatted LBA Size (FLBAS) <b>NVM Spec: Section:Figure</b> 247: byte 26
Type	Int64	
Description	The size, in bytes, of the smallest addressable unit, or block.	
LongDescription	This property shall contain size of the smallest addressable unit of the associated drive.	
Mandatory	Required	
Notes		Follow index in 247: Byte 26 (bits 3:0) to the LBA format structure to get the metadata size and LBA data size combination. These combined values are BlockSizeBytes.

**6.8.2.5 CapableSpeedGpbs** The mapping for CapableSpeedGpbs is summarized in Table 224.

**Table 224:** CapableSpeedGpbs mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	CapableSpeedGpbs	<b>NVM Spec Property / Field:</b> PXCAP+Ch <b>NVM Spec:</b> <b>Section:Figure 53</b>
Type	Decimal	

	Redfish/Swordfish	NVMe / NVMe-oF
Description	The speed, in gigabit per second (Gbit/s), at which this drive can communicate to a storage controller in ideal conditions.	
LongDescription	This property shall contain fastest capable bus speed, in gigabit per second (Gbit/s), of the associated drive.	
Mandatory	Required	
Notes		For PCIe, this is in the PCIe link capabilities (PXCAP+Ch). Figure 53. For NVMe-oF this is not specified; use the value for the highest supported native capability.

**6.8.2.6 CapacityBytes** The mapping for `CapacityBytes` is summarized in Table 226.

For drives supporting only a single namespace (no or default endurance group / set only):

**Table 225:** `CapacityBytes` for single namespace mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>CapacityBytes</code>	<b>NVM Spec Property / Field:</b> Namespace Size (NSZE) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247

	Redfish/Swordfish	NVMe / NVMe-oF
Type	Int64	<b>NVM Spec Property Type:</b> int 64 <b>Additional NVM Spec Identifying Information:</b> ByteOffset: 07:00, Identify Namespace data structure
Description	The size, in bytes, of this drive.	The total size of the NVMe allocated to this namespace.
LongDescription	This property shall contain the raw size, in bytes, of the associated drive.	The total size of the NVMe allocated to this namespace. The value is in bytes. This field shall be supported if the Namespace Management capability (refer to NVMe Base Specification section 8.12) is supported. This field may not correspond to the logical block size multiplied by the Namespace Size field. Due to thin provisioning or other settings (e.g., endurance), this field may be larger or smaller than the Namespace Size reported.
Mandatory	Required	No
Notes	Reporting capacity in bytes is the Redfish and Swordfish standard mechanism.	Returned in bytes 63:48 of the Identify Namespace Data Structure (NVM Command Set Specific). Reference NVMe Base Specification section in 5.15.2.1 and figure 247.

For drives supporting multiple namespaces:

**Table 226:** CapacityBytes for single namespace mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	CapacityBytes	The Total Endurance Group Capacity. Just the “Total Endurance Group Capacity” in the Endurance Group Log. See 5.14.1.9 + TP 4009
Type	Int64	
Description	The number of bytes currently allocated by the storage system in this data store for this data type.	
LongDescription	The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.	
Mandatory		
Notes		Note: This is not in 1.4a because TP 4009 was not integrated.

**6.8.2.7 Description** The mapping for `Description` is summarized in Table 227.

**Table 227:** Description mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Type	String	N/A
Description	The description of this resource.	N/A



	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specification-described requirements.	N/A
Mandatory	Yes	N/A
Notes	In Redfish, Description is a read-only field.	

**6.8.2.8 EncryptionAbility** The mapping for EncryptionAbility is summarized in Table 228.

**Table 228:** EncryptionAbility mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	EncryptionAbility	N/A
Type	Enum (EncryptionAbility)	
Description	The encryption ability of this drive.	
LongDescription	This property shall contain the encryption ability for the associated drive.	
Mandatory	Required	
Notes	Required when encryption is supported. Available values: None/SelfEncryptingDrive/Other	Maps to vendor capabilities.

**6.8.2.9 EncryptionStatus** The mapping for EncryptionStatus is summarized in Table 229.

**Table 229:** EncryptionStatus mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	EncryptionStatus	N/A
Type	Drive.EncryptionStatus	
Description	The status of the encryption of this drive.	
LongDescription	This property shall contain the encryption status for the associated drive.	
Mandatory	DependsOn EncryptionAbility != None	
Notes	Must be implemented and set when Encryption is enabled (EncryptionAbility will indicate encryption capability type.) Possible values: Unlocked/locked/foreign/unencrypted	Set according to vendor specs / mapping.

**6.8.2.10 FailurePredicted** The mapping for FailurePredicted is summarized in Table 230.

**Table 230:** FailurePredicted mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	FailurePredicted	<b>NVM Spec Property / Field:</b> SmartHealthLog <b>NVM Spec:</b> <b>Section:Figure 196</b>
Type	Boolean	
Description	An indication of whether this drive currently predicts a failure in the near future.	

---

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall indicate whether this drive currently predicts a manufacturer-defined failure.	
Mandatory	Required	
Notes	Implements the results of the SMART log data.	Trigger when the smart health errors indicate an issue (e.g.): media and data integrity errors, and self-check.

---

**6.8.2.11 Identifiers** The mapping for `Identifiers` is summarized in Table 231.

**Table 231:** Identifiers mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	NVM Subsystem NVMe Qualified Name (SUBNQN)
Type	Collection(Resource.Identifier)	An array of identifiers
Description	The Durable names for the subsystem.	An array of identifiers
LongDescription	This property shall contain a list of all known durable names for the associated subsystem.	This specifies the NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string. Refer to NVMe Base Specification, section 7.9, for the definition of NVMe Qualified Name. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).
Mandatory	Yes	Yes
Notes	This is an array of unique identifiers for the NVM Subsystem.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

**6.8.2.12 Identifiers.DurableNameFormat** The mapping for `Identifiers.DurableNameFormat` is summarized in Table 232.

**Table 232:** `Identifiers.DurableNameFormat` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Identifiers.DurableNameFormat</code>	NVM Subsystem NVMe Qualified Name (SUBNQN)
Type	<code>Resource.v1_1_0.DurableNameFormat</code>	There is a single value for this array in Subsystem. The property type is of type NVMe Qualified Name (NQN).
Description	The format of the Durable names for the subsystem.	NVM Subsystem NVMe Qualified Name (SUBNQN)
LongDescription	This specifies the format of the associated NVM Subsystem NVMe Qualified Name of type NQN. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).	
Mandatory	No	Yes
Notes	This is an enum with multiple potential values. For this particular usage in Subsystem, there will only be one instance populated, of type NQN.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

**6.8.2.13 Identifiers.DurableName** The mapping for `Identifiers.DurableName` is summarized in Table 233.

**Table 233:** `Identifiers.DurableName` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Identifiers.DurableName</code>	NVM Subsystem NVMe Qualified Name (SUBNQN)
Type	Edm.String	The NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string
Description	The format of the Durable names for the subsystem.	NVM Subsystem NVMe Qualified Name (SUBNQN)
LongDescription	This specifies the NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string. Refer to NVMe Base Specification, section 7.9, for the definition of NVMe Qualified Name. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).	
Mandatory	No	Yes
Notes	For this particular usage in Subsystem, there will only be one instance populated in the identifiers array.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

**6.8.2.14 IndicatorLED** The mapping for `IndicatorLED` is summarized in Table 234.

**Table 234:** `IndicatorLED` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>IndicatorLED</code>	N/A
Type	Boolean	N/A
Description	An indication of whether this drive currently predicts a failure in the near future.	
LongDescription	This property shall indicate whether this drive currently predicts a manufacturer-defined failure.	N/A
Mandatory	Do Not Implement	
Notes	This property has been deprecated. See guidance / implement the <code>LocationIndicatorActive</code> property instead.	

**6.8.2.15 Links.Volumes** The mapping for `Links.Volume` is summarized in Table 235.

**Table 235:** `Links.Volume` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.Volume</code>	
Type	<code>Collection(Volume.Volume)</code>	
Description	An array of links to the volumes that this drive either wholly or only partially contains.	

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain an array of links to resources of type Volume with which this drive is associated. This property shall include all volume resources of which this drive is a member and all volumes for which this drive acts as a spare if the hot spare type is Dedicated.	
Mandatory	Required	
Notes	This array shall contain links to all namespaces associated with this physical drive.	One way to do this would be get all of the controllers, iterate through the list and get all of the namespace ids.

**6.8.2.16 Links.Volumes@odata.count** The mapping for `Links.Volumes@odata.count` is summarized in Table 236.

**Table 236:** `Links.Volumes@odata.count` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Links.Volumes@odata.count</code>	
Type	<code>(odata property)int64</code>	N/A
Description	Count of the number of items in the <code>Links.Volume</code> array.	
LongDescription		
Mandatory	Required	
Notes		The number of namespaces is available from NVMe on a per controller basis.



**6.8.2.17 Location** The mapping for `Location` is summarized in Table 237.

**Table 237:** Location mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Location	N/A
Type	Collection(Resource.Location)	
Description	The location of the drive.	
LongDescription	This property shall contain location information of the associated drive.	N/A
Mandatory	Do Not Implement	
Notes	This property has been deprecated. See guidance / implement the <code>PhysicalLocation</code> property instead.	

**6.8.2.18 LocationIndicatorActive** The mapping for `LocationIndicatorActive` is summarized in Table 238.

**Table 238:** LocationIndicatorActive mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	LocationIndicatorActive	N/A
Type	Boolean	N/A
Description	An indicator allowing an operator to physically locate this resource.	

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain the state of the indicator used to physically identify or locate this resource. A write to this property shall update the value of IndicatorLED in this resource, if supported, to reflect the implementation of the locating function.	N/A
Mandatory	Recommended	
Notes	This property replaces the IndicatorLED, which has been deprecated.	Comes from vendor.

**6.8.2.19 Manufacturer** The mapping for `Manufacturer` is summarized in Table 239.

**Table 239:** Manufacturer mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Manufacturer	<b>NVM Spec Property / Field: NVM Spec: Section: Figure</b>
Type	String	
Description	The manufacturer of this drive.	
LongDescription	This property shall contain the name of the organization responsible for producing the drive. This organization might be the entity from whom the drive is purchased, but this is not necessarily true.	

	Redfish/Swordfish	NVMe / NVMe-oF
Mandatory	Required	
Notes		End clients expect to see the name of the company (e.g.; Contoso, BestVendor). While the value may be filled from the IdentifyController PCI Vendor ID or SubsystemID field, it would be preferable to have this filled with the actual string value of the company name.

**6.8.2.20 MediaType** The mapping for `MediaType` is summarized in Table 240.

**Table 240:** `MediaType` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>MediaType</code>	N/A
Type	enum ( <code>MediaType</code> )	
Description	The type of media contained in this drive.	
LongDescription	This property shall contain the type of media contained in the associated drive.	N/A
Mandatory	Required	
Notes	Possible values: HDD/SSD/SMR.	NVMe SSD Drives to report SSD.

**6.8.2.21 Model** The mapping for `Model` is summarized in Table 241.

**Table 241:** Model mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Model	<b>NVM Spec Property / Field:</b> IdentifyController / Model Number (MN) <b>NVM Spec:</b> <b>Section: Figure</b> 249 byte 24:63
Type	String	N/A
Description	The model number for the drive.	
LongDescription	This property shall contain the name by which the manufacturer generally refers to the drive.	N/A
Mandatory	Required	
Notes		

**6.8.2.22 Multipath** The mapping for `Multipath` is summarized in Table 242.

**Table 242:** Multipath mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Multipath	<b>NVM Spec Property / Field:</b> IdentifyNamespace: NMIC <b>NVM Spec: Section:Figure</b> 247: Byte 30, bit 0
Type	Boolean	N/A
Description	An indication of whether the drive is accessible from multiple paths.	

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall indicate whether the drive is accessible by an initiator from multiple paths allowing for failover capabilities upon a path failure.	N/A
Mandatory	Recommended to implement. Required property if drive is dual-ported.	
Notes		

**6.8.2.23 Name** The mapping for Name is summarized in Table 243.

**Table 243:** Name mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Name	<b>NVM Spec Property / Field:</b> Namespace ID (NSID) <b>NVM Spec: Section:Figure</b> NVMe 1.4a
Type	String	
Description	The name of the resource or array member.	N/A
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specification-described requirements. This string value shall be of the 'Name' reserved word format.	

	Redfish/Swordfish	NVMe / NVMe-oF
Mandatory	Yes	N/A
Notes	In Redfish, Name is a read-only field.	

**6.8.2.24 NegotiatedSpeedGbps** The mapping for `NegotiatedSpeedGbps` is summarized in Table 244.

**Table 244:** `NegotiatedSpeedGbps` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>NegotiatedSpeedGbps</code>	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Decimal	N/A
Description	The speed, in gigabit per second (Gbit/s), at which this drive currently communicates to the storage controller.	
LongDescription	This property shall contain current bus speed, in gigabit per second (Gbit/s), of the associated drive.	N/A
Mandatory	Required	
Notes		For PCIe, this is in the PCIe link capabilities (PXCAP+12h). Figure 55. For NVMe-oF this is not specified; use the value for the native capability.

**6.8.2.25 PhysicalLocation.Info** The mapping for `PhysicalLocation.Info` is summarized in Table 245.

**Table 245:** PhysicalLocation.Info mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	PhysicalLocation.Info	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec: Section:Figure</b> N/A
Type	String	
Mandatory	Do Not Implement	
Notes	This property has been deprecated.	

**6.8.2.26 PhysicalLocation.InfoFormat** The mapping for PhysicalLocation.InfoFormat is summarized in Table 246.

**Table 246:** PhysicalLocation.InfoFormat mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	PhysicalLocation.InfoFormat	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec: Section:Figure</b> N/A
Type	String	
Mandatory	Do Not Implement	
Notes	This property has been deprecated.	

**6.8.2.27 PhysicalLocation.PartLocation** The mapping for PhysicalLocation.PartLocation is summarized in Table 247.

**Table 247:** PhysicalLocation.PartLocation mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	PhysicalLocation.PartLocation	<b>NVM Spec Property / Field:</b> N/A <b>NVM Spec:</b> <b>Section:Figure</b> N/A
Type	Boolean	N/A
Description	An indication of whether the drive is accessible from multiple paths.	
LongDescription	This property shall indicate whether the drive is accessible by an initiator from multiple paths allowing for failover capabilities upon a path failure.	N/A
Mandatory	Recommended to implement. Required property if drive is dual-ported.	
Notes	The drive should support this property to be filled in by a layered process (e.g., BMC). Support for any other properties in PhysicalLocation are at the discretion of the vendor.	

**6.8.2.28 PredictedMediaLifetimeLeftPercent** The mapping for PredictedMediaLifetimeLeftPercent is summarized in Table 248.



**Table 248:** PredictedMediaLifetimeLeftPercent mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	PredictedMediaLifetimeLeftPercent	<b>NVM Spec Property / Field:</b> Get Log Page – SMART / Health Information Log <b>NVM Spec: Section:Figure</b> Figure 196: 05
Type	Decimal	
Description	The percentage of reads and writes that are predicted to be available for the media.	
LongDescription	This property shall contain an indicator of the percentage of life remaining in the drive's media.	N/A
Mandatory	Required.	
Notes	Maps to percentage used in SMART information log	Calculate as 100 - value reported (PercentageUsed).

**6.8.2.29 Protocol** The mapping for Protocol is summarized in Table 249.

**Table 249:** Protocol mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Protocol	
Type	Protocol.Protocol	
Description	The protocol that this drive currently uses to communicate to the storage controller.	

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain the protocol that the associated drive currently uses to communicate to the storage controller for this system.	
Mandatory	Required.	
Notes	Possible values (long list)	NVMe Drives shall report "NVMe".

**6.8.2.30 Revision** The mapping for `Revision` is summarized in Table 250.

**Table 250:** Revision mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Revision	<b>NVM Spec Property / Field:</b> IdentifyController: Firmware Revision (FR) <b>NVM Spec:</b> <b>Section:Figure</b> 249: 71:64
Type	String	
Description	The revision of this drive. This is typically the firmware or hardware version of the drive.	
LongDescription	This property shall contain the manufacturer-defined revision for the associated drive.	
Mandatory	Required.	
Notes		Return the currently active firmware revision information.

**6.8.2.31 RotationSpeedRPM** The mapping for `RotationSpeedRPM` is summarized in Table 251.

**Table 251:** `RotationSpeedRPM` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>RotationSpeedRPM</code>	
Type	Decimal	
Description	An indication of whether the drive is accessible from multiple paths.	
LongDescription	This property shall indicate whether the drive is accessible by an initiator from multiple paths allowing for failover capabilities upon a path failure.	
Mandatory	DependsOn <code>MediaType</code> value. If <code>MediaType == SSD</code> , (not required to) do not implement.	
Notes	Future proofing - will be a relevant property for NVMe HDDs.	

**6.8.2.32 SKU** The mapping for `SKU` is summarized in Table 252.

**Table 252:** `SKU` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>SKU</code>	N/A
Type	String	
Description	The SKU for this drive.	

	Redfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain the stock-keeping unit (SKU) number for this drive.	
Mandatory	Required.	
Notes	The drive should support this property to be filled in by a layered process (e.g., OEM manufacturing).	

**6.8.2.33 SerialNumber** The mapping for `SerialNumber` is summarized in Table 253.

**Table 253:** `SerialNumber` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>SerialNumber</code>	<b>NVM Spec Property / Field:</b> <code>IdentifyController / SerialNumber (SN)</code> <b>NVM Spec: Section: Figure 249</b> byte 04:23
Type	String	
Description	The serial number for this drive.	
LongDescription	This property shall contain the manufacturer-allocated number that identifies the drive.	
Mandatory	Required.	
Notes		

**6.8.2.34 Status.State** The mapping for `Status.state` is summarized in Table 254.

**Table 254:** Status.State mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Status.State	Enable (EN)
Type	Resource.State (enum)	
Description	The known state of the resource, such as, enabled.	
LongDescription	This property shall indicate whether and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.	
Mandatory	Required (for NVM Drives)	

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values: Enabled / Disabled / StandbyOffline / StandbySpare / InTest / Starting / Absent / UnavailableOffline / Deferring / Quiesced / Updating / Qualified	The drive should support this property to be filled in by a higher level client (e.g., BMC). The drive can self-set this drive to Enabled / Disabled / InTest / Updating. If any controller in the drive is set to Enabled, set to “Enabled”. If all controllers are set to disabled, set to “Disabled”. If a firmware update is in progress, set to “Updating”. If the drive is running a self-test, set to “InTest”.

**6.8.2.35 Status.Health** The mapping for `Status.Health` is summarized in Table 255.

**Table 255:** `Status.Health` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>Status.Health</code>	<b>NVM Spec Property / Field:</b> CSTS – Controller Status <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 3.1.6, Figure 79 <b>NVM Spec</b> <b>Property / Field:</b> Critical Warning <b>NVM Spec:</b> <b>Section:Figure</b> NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	<code>Resource.Health</code>	

	Redfish/Swordfish	NVMe / NVMe-oF
Description	The health state of this resource in the absence of its dependent resources.	
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
Mandatory	Required for NVM Drives.	
Notes	Possible Values: OK / Warning / Critical	Report to same value as set for worst-case controller Status.Health.

**6.8.2.36 StatusIndicator** The mapping for `StatusIndicator` is summarized in Table 256.

**Table 256:** `StatusIndicator` mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	<code>StatusIndicator</code>	N/A
Type	enum ( <code>StatusIndicator</code> )	
Description	An indication of whether the drive is accessible from multiple paths.	
LongDescription	This property shall indicate whether the drive is accessible by an initiator from multiple paths allowing for failover capabilities upon a path failure.	
Mandatory	Required.	

	Redfish/Swordfish	NVMe / NVMe-oF
Notes	Multiple values possible. Relevant values for NVMe standalone drives: OK, Fail, PredictiveFailureAnalysis.	The drive should support this property to be filled in by a higher level client (e.g., BMC). The drive can self-set this drive only to OK (or potentially fail, but only if the property has not been set by higher-level software).

**6.8.2.37 WriteCacheEnabled** The mapping for `WriteCacheEnabled` is summarized in Table 257.

**Table 257:** WriteCacheEnabled mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	SerialNumber	<b>NVM Spec Property / Field:</b> Volatile Write Cache Enable (WCE) <b>NVM Spec:</b> <b>Section:Figure</b> 283: 00
Type	Boolean	
Description	An indication of whether the drive write cache is enabled.	
LongDescription	This property shall indicate whether the drive write cache is enabled.	
Mandatory	Required (for NVMe Drives).	
Notes		Bits 00 of WCE indicate whether the WCE is enabled or disabled.



## 7 Other Feature Mapping

### 7.1 Introduction

There are additional features and functionality that are also desirable to be exposed via the Redfish/Swordfish management ecosystems; however, there is not necessarily a clear mapping for these to a specific portion of the NVMe specification, or the functionality has a large component provided by the NVMe device implementer. This section provides an overview of the required functionality and presentation required to present a common, standardized interface to the Redfish/Swordfish clients.

### 7.2 Firmware Update

Firmware update is a required function to present comprehensive management. This is presented in Redfish through the “Update” service. The Update Service provides a standardized interface to all software and firmware update mechanisms throughout the server, storage, and networking environment, and as such, provides an abstracted, standardized interface that largely manages the acquisition from the client of the image files (and subsequent distribution of those to the designated targets), as well as very coarse-grained scheduling.

Note that this mechanism does not include any “active image” management capability (e.g., rollback).

#### 7.2.1 Firmware update for NVMe Drives

NVMe drives shall support a standard implementation of the Redfish Update service. This is fundamentally a single-step invocation process on the update service that gets the image file from a specified URI using the SimpleUpdate action.

One parameter that shall be specified is the OperationApplyTime; this indicates when to apply the image. If not explicitly specified, the implementation should assume the request is to be applied immediately.

The values of the OperationApplyTime that shall be supported by NVMe drives are: - Immediate - OnReset

Example simple update request:

```
POST /redfish/v1/UpdateService/Actions/UpdateService.SimpleUpdate HTTP/1.1
```

Content-Type: application/json

Content-Length: <computed-length>

```
{
  "ImageURI": "https://192.168.1.250/images/dev1_update.bin"
  "@Redfish.OperationApplyTime": "OnReset"
}
```

The username and password parameters summarized in Table 258 may be required to access the image. Implementations should support these. Additionally, the implementation may support the Targets parameter to specify the list of devices on which to apply the image. If Targets is not specified, the image will be applied to all applicable devices.

**Table 258:** Additional parameters

Parameter	Type	Description
Username	String	The user name to access the URI specified by the ImageURI parameter.
Password	String	The password to access the URI specified by the ImageURI parameter.
Targets	Array	An array of strings that are URIs to resources that indicate where to apply the image.

The SimpleUpdate mechanism is fundamentally a “pull” mechanism (the implementation pulls a file from a target); the UpdateService also supports a “push” mechanism (the client “pushes” the image to the implementation as part of the request payload) that may also be implemented. For more information this mechanism, using the MultipartHttpPushUri property, is documented in the Redfish Specification.

**7.2.1.1 Mapping Images to NVMe Capabilities** It will be up to the implementation to determine the NVMe specific parameters to use upon receipt of the image from the update service. However, the following general guidelines should be used to ensure behavioral consistency across implementations:

When receiving image: - If open slots, the implementation can choose what open slot to use, and load the image to that slot. - If all slots are full, the implementation can choose (typically any slot except the currently active image).

After loaded to a slot, the implementation will mark the image as active. Based on the “apply time” setting, the implementation setting will activate the image either immediately, or set to activate on (the next) reset.

## Appendix A: Objects without a direct mapping to the NVMe model

### A.1: Overview

There are a number of objects that are required for the proper integration of NVMe support within Redfish and Swordfish, but which are not supported by an entity that can be mapped directly from the various NVM Specifications. Information about these related but un-mapped objects are defined elsewhere in the documentation provided with each Swordfish release.

They are summarized in Table A.1 for ease of use, including:

- Object Name
- NVMe Device Expected Usage

---

Object	NVMe Device Expected Usage
NetworkAdapter	NVMe-oF Subsystems, Network-Attach Drives
Port (on NetworkAdapter)	NVMe-oF Subsystems, Network-Attach Drives
NetworkDeviceFunction	NVMe-oF Subsystems, Network-Attach Drives
Fabric	NVMe-oF Subsystems, Network-Attach Drives and arrays
Connection	NVMe-oF Subsystems, Network-Attach Drives and arrays
Endpoint	NVMe-oF Subsystems, Network-Attach Drives and arrays
Endpoint Group	NVMe-oF Subsystems, Network-Attach Drives and arrays
Switch	NVMe-oF Subsystems, Network-Attach Drives and arrays
Port (on switch)	NVMe-oF Subsystems, Network-Attach Drives and arrays
EthernetInterface	NVMe-oF Subsystems, Network-Attach Drives and arrays, EBOF/JBOF

Object	NVMe Device Expected Usage
Manager	EBOF/JBOF, Complex devices, Arrays
NetworkProtocol	EBOF/JBOF, Complex devices, Arrays

Table A.1: Related Objects

Required usage of objects and their properties are contained in the relevant Swordfish profiles.

For example, for Ethernet-Attach drives, the NetworkAdapter, Port, and NetworkDeviceFunction required properties are specified as part of the “Ethernet-Attach NVMe Drive” profile.

## A.2: Related Use Cases

The Swordfish Scalable Storage Management API User’s Guide contains real-world examples of how clients will interact with an implementation. Table A.2 summarizes the NVMe use cases as of 12 April 2022.

Title	Description
Attach a Namespace	Attach a Namespace
Deprovision a Namespace	Deprovision a Namespace
Detach a Namespace	Detach a Namespace
Provision a Namespace	Provision a Namespace
Provision an NVM Set with a Namespace	Provision an NVM Set associated with a Namespace
Report capacity for a Namespace	Report capacity for a Namespace
Report remaining life for a Namespace	Report remaining life for a Namespace

Table A.2: NVMe Use Case Summary

## Annex B: Bibliography

### B.1 Overview

The following referenced documents provide important support for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

### B.2 Informational references

The informational references are summarized in Table B.1.

Tag	Title (Version)	Author	URL
Profiles	Swordfish Profile Bundle Working Draft	SNIA	<a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/smi/swordfish</a>
UsersGuide	wordfish Scalable Storage Management API User's Guide	SNIA	<a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/smi/swordfish</a>

Table B.1: Informational References