

# **Swordfish NVMe Model Overview and Mapping Guide**

Version: 1.2.2a

**Abstract:** The Swordfish NVMe Model Overview and Mapping Guide defines the model to manage NVMe and NVMeoF storage systems with Redfish and Swordfish. It provides the detailed mapping information between the NVMe, NVMeoF specifications and the Redfish and Swordfish specifications.

# **SNIA Approved Publication**

This document has been released and approved by the SNIA. The SNIA believes that the ideas, methodologies, and technologies described in this document accurately represent the SNIA goals and are appropriate for widespread distribution. Suggestion for revision should be directed to http://www.snia.org/feedback/.

Last Updated: 14 June 2021

# **Contents**

	USA	GE	14
		DISCLAIMER	15
		Current Revision	15
		Contact SNIA	15
		FEEDBACK AND INTERPRETATIONS	15
		INTENDED AUDIENCE	16
		VERSIONING POLICY	16
		Revision History	16
	Abo	ıt SNIA	17
	Ackr	owledgements	17
1	Abst	ract	19
2	Sco	oe e	20
	2.1	Document Goals	20
	2.2	Audience Assumptions	20
3	Nor		21
	3.1		21
	3.2	Approved references	21
	3.3	References under development	22
	3.4	Other references	22
4	NVM	e Model Overview	23
	4.1	Introduction	23
		4.1.1 Fundamental Model Design Assertions	23
	4.2	Overall NVMe Subsystem Model	24
		4.2.1 Major NVM Objects Mapped to RF/SF	24
		4.2.2 Unmapped objects	25
		4.2.3 NVM Subsystem Model	25
		4.2.4 NVMe-oF Subsystem Model	26
5	Exa	nple Instances	28
	5.1	Introduction	28
	5.2	Simple SSD	28
		5.2.1 Overview	28
		5.2.2 Explanation of Object use	29
		5.2.3 Redfish / Swordfish Object Representation	29

	5.2.4	Mockup	29
5.3	Compl	lex SSD	30
	5.3.1	Overview	30
	5.3.2	Explanation of Object use	30
	5.3.3	Redfish / Swordfish Object Representation	31
5.4	Simple	e SSD with IP (NVMe-oF) Attach	31
	5.4.1	Overview	31
	5.4.2	Explanation of Object use	32
	5.4.3	Redfish / Swordfish Object Representation	32
	5.4.4	Mockup	33
5.5	JBOF		33
	5.5.1	Overview	33
	5.5.2	Explanation of Object use	34
	5.5.3	Redfish / Swordfish Object Representation	35
	5.5.4	Mockup	35
5.6	Opaqu	ıe Array	36
	5.6.1	Overview	36
	5.6.2	Explanation of Object use	36
	5.6.3	Redfish / Swordfish Object Representation	36
	5.6.4	Mockup	37
5.7	Subsys	stem (Fabric) Model - NVMe-oF: Fabric Attach Subsystem	37
	5.7.1	Overview	37
	5.7.2	Explanation of Object use	38
	5.7.3	Redfish / Swordfish Object Representation	38
	5.7.4	Mockup	39
5.8	NVMe	Domains	39
	5.8.1	Overview	39
	5.8.2	Explanation of Object use	40
	5.8.3	Mockup	40
_			
	perty M		41
6.1	Introd		41
6.2	-	rty Mapping Template	41
6.3		ubsystem	44
	6.3.1	Mockup	44
	6.3.2	Property Mapping	45
6.4		ontrollers	71
	6.4.1	Admin Controller	
	6.4.2	Discovery Controller	110

6

		6.4.3	IO Controller	147
	6.5	Names	space	208
		6.5.1	Mockup	208
		6.5.2	Property Mapping	209
	6.6	Endura	ance Group	256
		6.6.1	Mockup	256
		6.6.2	Property Mapping	257
	6.7	NVM S	et	294
		6.7.1	Mockup	294
		6.7.2	Property Mapping	295
	6.8	Drive .		334
		6.8.1	Mockup	334
		6.8.2	Property Mapping	335
7	Othe	er Featu	ure Mapping	375
	7.1	Introd	uction	375
	7.2	Firmw	are Update	375
		7.2.1	Firmware update for NVMe Drives	375
Ar	nex A	: Objec	ts without a direct mapping to the NVMe model	377
	A.1:	Overvie	w	377
	A.2:	Related	Use Cases	377
Ar	nex B	: Biblio	ography :	379
	B.1 C	Overviev	N	379
	B 2 I	nformat	tional references	379

# **List of Tables**

1	Revision History	17
2	Contributors	18
3	Approved normative references	21
4	Property Mapping Template and Example	42
5	Actions.#StorageController.SetEncryptionKey mapping	45
6	Controllers mapping	46
7	Description mapping	47
8	Drives mapping	49
9	Identifiers mapping	50
10	Identifiers.DurableNameFormat mapping	52
11	Identifiers.DurableName mapping	54
12	Links.Enclosures mapping	56
13	Links.Enclosures@odata.count mapping	58
14	Links.SimpleStorage mapping	59
15	Name mapping	59
16	Status. State mapping	62
17	Status.Health mapping	65
18	Status.HealthRollup mapping	67
19	StorageControllers mapping	69
20	StorageGroups mapping	70
21	Volumes mapping	71
22	Assembly mapping	73
23	Assembly mapping	75
24	CacheSummary mapping	76
25	ControllerRates mapping	77
26	Description mapping	78
27	FirmwareVersion mapping	79
28	Identifiers mapping	80
29	Identifiers.DurableName mapping	81
30	Identifiers.DurableNameFormat mapping	82
31	Links.AttachedVolumes mapping	83
32	Location mapping	84
33	Manufacturer mapping	85
34	Model mapping	86
35	Name mapping	87
36	NVMeControllerProperties.ControllerType mapping	89

3	7	NVMeControllerProperties.NVMeVersion mapping	90
3	8	$NVMe Controller Properties. NVMe Controller Attributes. \ Supports SQAs-$	
		sociations mapping	91
3	9	$NVMe Controller Properties. NVMe Controller Attributes. \ Supports Traf-$	
		ficBasedKeepAlive mapping	92
4	0	$NVMe Controller Properties. NVMe Controller Attributes. \ Supports Ex-$	
		ceedingPowerOfNonOperationalState mapping	94
4	1	NVMeControllerProperties.NVMeControllerAttributes. Sup-	
		ports128BitHostId mapping	96
4	2	NVMeControllerProperties.ANACharacteristics mapping	97
4	3	NNVMeControllerProperties.ANACharacteristics mapping	99
4	4	NVMeControllerProperties.NVMeSMARTCriticalWarnings. OverallSys-	
		temDegraded mapping	100
4	5	SKU mapping	101
4	6	SpeedGbps mapping	102
4	7	Status.Health mapping	103
4	8	Status. State mapping	105
4	9	SupportedControllerProtocols mapping	108
5	0	SupportedDeviceProtocols mapping	109
5	1	Assembly mapping	111
5	2	Assembly mapping	113
5	3	CacheSummary mapping	114
5	4	ControllerRates mapping	115
5	5	Description mapping	116
5	6	FirmwareVersion mapping	117
5	7	Identifiers mapping	117
5	8	Identifiers.DurableName mapping	118
5	9	Identifiers.DurableNameFormat mapping	119
6	0	Links.AttachedVolumes mapping	120
6	1	Links.Endpoints mapping	122
6	2	Links.Connections mapping	123
6	3	Location mapping	124
6	4	Manufacturer mapping	124
6	5	Model mapping	126
6	6	Name mapping	
6	7	NVMeControllerProperties.ControllerType mapping	129
6	8	NVMeControllerProperties.NVMeVersion mapping	

69	NVMeControllerProperties.NVMeControllerAttributes. SupportsTraf-	
	ficBasedKeepAlive mapping	131
70	$NVMe Controller Properties. NVMe Controller Attributes. \ Supports Ex-$	
	ceedingPowerOfNonOperationalState mapping	133
71	NVMeControllerProperties.NVMeControllerAttributes. Sup-	
	ports128BitHostld mapping	135
72	NVMeControllerProperties.ANACharacteristics mapping	136
73	${\tt NVMeControllerProperties.NVMeSMARTCritical Warnings.\ Overall Substitute of the control of $	
	systemDegraded mapping	138
74	${\tt NVMeController Properties. NVMeSMARTC} ritical Warnings. \ {\tt SpareCall}$	
	pacityWornOut mapping	139
75	Status.Health mapping	140
76	Status. State mapping	142
77	SupportedControllerProtocols mapping	145
78	SupportedDeviceProtocols mapping	146
79	Assembly mapping	149
80	Assembly mapping	151
81	CacheSummary mapping	152
82	ControllerRates mapping	153
83	Description mapping	154
84	FirmwareVersion mapping	155
85	Identifiers mapping	155
86	Identifiers.DurableName mapping	156
87	Identifiers.DurableNameFormat mapping	157
88	Links.AttachedVolumes mapping	159
89	Links.Endpoints mapping	160
90	Location mapping	161
91	Manufacturer mapping	162
92	Model mapping	163
93	Name mapping	164
94	NVMeControllerProperties.ControllerType mapping	166
95	NVMeControllerProperties.NVMeVersion mapping	167
96	${\tt NVMeControllerProperties.NVMeControllerAttributes. Reports UUIDList}$	
	mapping	168
97	${\tt NVMeControllerProperties.NVMeControllerAttributes. \ Supports SQAs-}$	
	sociations mapping	169
98	NVMeControllerProperties.NVMeControllerAttributes. Report-	
	sNamespaceGranularity mapping	170

99	NVMeControllerProperties.NVMeControllerAttributes. SupportsTraf-	
	ficBasedKeepAlive mapping	171
100	NVMeControllerProperties.NVMeControllerAttributes. SupportsPre-	
	dictableLatencyMode mapping	173
101	NVMeControllerProperties.NVMeControllerAttributes. Support-	
	sEnduranceGroups mapping	174
102	NVMeControllerProperties.NVMeControllerAttributes. SupportsRead-	
	RecoveryLevels mapping	176
103	NVMeControllerProperties.NVMeControllerAttributes. SupportsNVM-	
	Sets mapping	177
104	NVMeControllerProperties.NVMeControllerAttributes. SupportsEx-	
	ceedingPowerOfNonOperationalState mapping	179
105	NVMeControllerProperties.NVMeControllerAttributes. Sup-	
	ports128BitHostId mapping	181
106	NVMeControllerProperties.ANACharacteristics mapping	182
107	NNVMeControllerProperties.ANACharacteristics mapping	184
108	NNVMeControllerProperties.ANACharacteristics.AccessState mapping	185
109	${\tt NNVMeController Properties. ANA Characteristics. Volume\ mapping}  .  .$	186
110	${\tt NVMeControllerProperties.NVMeSMARTCriticalWarnings.PMRUnreliable}$	
	mapping	188
111	NVMeControllerProperties.NVMeSMARTCriticalWarnings. PowerBack-	
	upFailed mapping	190
112	NV Me Controller Properties. NV Me SMART Critical Warnings. Media In Read On the Control of th	ıly
	mapping	191
113	NVMeControllerProperties.NVMeSMARTCriticalWarnings. OverallSub-	
	systemDegraded mapping	192
114	NVMeControllerProperties.NVMeSMARTCriticalWarnings. SpareCa-	
	pacityWornOut mapping	193
115	PCIeInterface.PCIeType mapping	194
116	PCIeInterface.MaxPCIeType mapping	195
117	PCIeInterface.LanesInUse mapping	196
118	PCIeInterface.LanesInUse mapping	197
119	Ports mapping	198
120	SKU mapping	199
121	SpeedGbps mapping	200
122	Status. State mapping	201
123	Status. Health mapping	204
124	SupportedControllerProtocols mapping	206

125	SupportedDeviceProtocols mapping	207
126	BlockSizeBytes mapping	210
127	Capacity.Data.ConsumedBytes mapping	211
128	Capacity.Data.ProvisionedBytes mapping	212
129	Capacity.Data.AllocatedBytes mapping	214
130	Capacity.Metadata.AllocatedBytes mapping	215
131	CapacitySources mapping	217
132	Description mapping	218
133	DisplayName mapping	219
134	Identifiers mapping	220
135	Identifiers.DurableName mapping	222
136	Identifiers.DurableNameFormat mapping	223
137	InitializeMethod mapping	224
138	Links.Drives mapping	226
139	LogicalUnitNumber mapping	226
140	MaxBlockSizeBytes mapping	227
141	Name mapping	228
142	NVMeNamespaceProperties.NamespaceId mapping	230
143	NVMeNamespaceProperties.IsShareable mapping	232
144	NVMeNamespaceProperties.NamespaceFeatures. SupportsThinPro-	
	visioning mapping	233
145	NVMeNamespaceProperties.NamespaceFeatures. SupportsDeallo-	
	catedOrUnwrittenLBError mapping	234
146	NV Me Name space Properties. Name space Features. Supports NGUID Reuse	
	mapping	236
147	NVMeNamespaceProperties.NamespaceFeatures. SupportsAtomic-	
	TransactionSize mapping	238
148	NVMeNamespaceProperties.NamespaceFeatures. SupportsIOPerfor-	
	manceHints mapping	240
149	150: NVMeNamespaceProperties.NumberLBAFormats mapping	242
150	NVMeNamespaceProperties.FormattedLBASize mapping	244
151	NVMeNamespaceProperties.MetadataTransferredAtEndOfDataLBA	
	mapping	245
152	NVMeNamespaceProperties.NVMeVersion mapping	246
153	OptimumIOSizeBytes mapping	247
154	OptimumIOSizeBytes mapping	
155	Status. State mapping	
156	Status.Health mapping	

157	Status.HealthRollup mapping	253
158	StorageGroups mapping	254
159	WriteCachePolicy mapping	255
160	Allocated Pools mapping	258
161	Capacity.Data.AllocatedBytes mapping	259
162	Capacity.Data.ConsumedBytes mapping	260
163	CapacitySources mapping	261
164	CapacitySources@odata.count mapping	262
165	Description mapping	263
166	Links.OwningStorageResource mapping	264
167	Name mapping	265
168	NVMeProperties.NVMePoolType	266
169	${\tt NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent}$	
	mapping	267
170	$NV Me Endurance Group Properties. End GrpLife time. Percent Used\ map-properties and GrpLife time. The properties of t$	
	ping	268
171	${\tt NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate}$	
	mapping	270
172	NVMe Endurance Group Properties. End Grp Lifetime. Data Units Read	
	mapping	272
173	${\tt NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten}$	
	mapping	274
174	NV Me Endurance Group Properties. End Grp Lifetime. Media Units Written	
	mapping	276
175	$NVMe Endurance Group Properties. End GrpLife time. \ \ HostRead Com-$	
	mandCount mapping	278
176	$NVMe Endurance Group Properties. End GrpLife time. \ \ HostWrite Community of the properties of the $	
	mandCount mapping	280
177	$NV Me Endurance Group Properties. End Grp Lifetime. \ \ Media And Data In-$	
	tegrityErrorCount mapping	282
178	${\tt NVMeEnduranceGroupProperties.EndGrpLifetime.} \ \ {\tt ErrorInformation-}$	
	LogEntryCount mapping	284
179	NVMeSetProperties.SetIdentifier	285
180	NVMeSetProperties.OptimalWriteSizeBytes mapping	286
181	NVMeSetProperties.EnduranceGroupIdentifier mapping	287
182	${\tt NVMeSetProperties.} Random 4 {\tt kReadTypicalNanoSeconds\ mapping}  .$	288
183	Status.Health mapping	290
124	Status State manning	291

185	Allocated Volumes mapping
186	Capacity.Data.AllocatedBytes mapping
187	Capacity.Data.ConsumedBytes mapping
188	CapacitySources mapping
189	CapacitySources@odata.count mapping
190	Description mapping
191	Links.OwningStorageResource mapping
192	Name mapping
193	NVMeProperties.NVMePoolType
194	NVMe Endurance Group Properties. Predicted Media Life Left Percent
	mapping
195	NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed map-
	ping
196	NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate
	mapping
197	NVMe Endurance Group Properties. End Grp Lifetime. Data Units Read
	mapping
198	NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten
	mapping
199	NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten
	mapping
200	NVMeEnduranceGroupProperties.EndGrpLifetime. HostReadCom-
	mandCount mapping
201	NVMeEnduranceGroupProperties.EndGrpLifetime. HostWriteCom-
	mandCount mapping
202	NVMeEnduranceGroupProperties.EndGrpLifetime. MediaAndDataIn-
	tegrityErrorCount mapping
203	NVMeEnduranceGroupProperties.EndGrpLifetime. ErrorInformation-
	LogEntryCount mapping
204	NVMeSetProperties.SetIdentifier
205	NVMeSetProperties.OptimalWriteSizeBytes mapping 325
206	NVMeSetProperties.EnduranceGroupIdentifier mapping 326
207	NVMeSetProperties.Random4kReadTypicalNanoSeconds mapping . 327
208	NVMeSetProperties.Random4kReadTypicalNanoSeconds mapping . 329
209	Status.State mapping
210	Status.Health mapping
211	Actions.#Drive.Reset mapping
212	Actions.#Drive.SecureErase mapping

213	Assembly.BinaryDataURI mapping
214	BlockSizeBytes mapping
215	CapableSpeedGpbs mapping
216	CapacityBytes for single namespace mapping
217	CapacityBytes for single namespace mapping
218	Description mapping
219	EncryptionAbility mapping
220	EncryptionStatus mapping
221	FailurePredicted mapping
222	Identifiers mapping
223	Identifiers.DurableNameFormat mapping
224	Identifiers.DurableName mapping
225	IndicatorLED mapping
226	Links.Volume mapping
227	Links.Volumes@odata.count mapping
228	Location mapping
229	LocationIndicatorActive mapping
230	Manufacturer mapping
231	MediaType mapping
232	Model mapping
233	Multipath mapping
234	Name mapping
235	NegotiatedSpeedGbps mapping
236	PhysicalLocation.Info mapping
237	PhysicalLocation.InfoFormat mapping
238	PhysicalLocation.PartLocation mapping
239	PredictedMediaLifetimeLeftPercent mapping
240	Protocol mapping
241	Revision mapping
242	RotationSpeedRPM mapping
243	SKU mapping
244	SerialNumber mapping
245	Status. State mapping
246	Status. Health mapping
247	StatusIndicator mapping
248	WriteCacheEnabled mapping

# **List of Figures**

1	Subsystem model	26
2	NVMe-oF Subsystem Model	27
3	Simple SSD instance diagram	28
4	Simple SSD mockup example	29
5	Complex SSD Model	30
6	Complex SSD Model	31
7	Simple IP-atteched SSD	32
8	Simple IP-attached SSD mockup	33
9	JBOF configuration controller object	34
10	Full JBOF system	34
11	JBOF system instance	35
12	Opaque array example	36
13	Sample opque system instance	37
14	NVMe-OF subsystem example	38
15	NVMe-oF system instance	39
16	NVMeDomain example	40

#### **USAGE**

Copyright (c) 2020 - 2021 SNIA. All rights reserved. All other trademarks or registered trademarks are the property of their respective owners.

The SNIA hereby grants permission for individuals to use this document for personal use only, and for corporations and other business entities to use this document for internal use only (including internal copying, distribution, and display) provided that:

- 1. Any text, diagram, chart, table or definition reproduced must be reproduced in its entirety with no alteration, and,
- 2. Any document, printed or electronic, in which material from this document (or any portion hereof) is reproduced must acknowledge the SNIA copyright on that material, and must credit the SNIA for granting permission for its reuse.

Other than as explicitly provided above, you may not make any commercial use of this document, or any portion thereof, or distribute this document to third parties. All rights not explicitly granted are expressly reserved to SNIA.

Permission to use this document for purposes other than those enumerated above may be requested by emailing tcmd@snia.org. Please include the identity of the requesting individual and/or company and a brief description of the purpose, nature, and scope of the requested use.

All code fragments, scripts, data tables, and sample code in this SNIA document are made available under the following license:

#### BSD 3-Clause Software License

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list
  of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this
  list of conditions and the following disclaimer in the documentation and/or
  other materials provided with the distribution.
- Neither the name of The Storage Networking Industry Association (SNIA) nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

#### **DISCLAIMER**

The information contained in this publication is subject to change without notice. The SNIA makes no warranty of any kind with regard to this publication, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The SNIA shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use.

Suggestions for revisions should be directed to http://www.snia.org/feedback/.

#### **Current Revision**

SNIA is actively engaged in expanding and refining the Swordfish documentation. The most current revision can be found on the SNIA web site at https://www.snia.org/tech\_activities/standards/curr\_standards/swordfish.

#### **Contact SNIA**

Current SNIA practice is to make updates and other information available through their web site at http://www.snia.org.

#### FEEDBACK AND INTERPRETATIONS

Requests for interpretation, suggestions for improvement and addenda, or defect reports are welcome. They should be sent via the SNIA Feedback Portal at

http://www.snia.org/feedback/ or by mail to the Storage Networking Industry Association, 4360 ArrowsWest Drive, Colorado Springs, Colorado 80907, U.S.A.

#### **INTENDED AUDIENCE**

This document is intended for use by individuals and companies engaged in storage management.

#### **VERSIONING POLICY**

This document is versioned material. Versioned material shall have a three-level revision identifier, comprised of a version number 'v', a release number 'r' and an errata number 'e'. Future publications of this document are subject to specific constraints on the scope of change that is permissible from one revision to the next and the degree of interoperability and backward compatibility that should be assumed between products designed to this standard. This versioning policy applies to all SNIA Swordfish versioned materials.

Version Number: Versioned material having version number 'v' shall be backwards compatible with all of revisions of that material that have the same version number 'v'. There is no assurance of interoperability or backward compatibility between revisions of a versioned material with different version numbers.

Release Number: Versioned material with a version number 'v' and release number 'r' shall be backwards compatible with previous revisions of the material with the same version number, and a lower release number. A minor revision represents a technical change to existing content or an adjustment to the scope of the versioned material. Each minor revision causes the release number to be increased by one.

Errata Number: Versioned material having version number 'v', a release number 'r', and an errata number 'e' should be backwards compatible with previous revisions of the material with the same version number and release number ("errata versions"). An errata revision of versioned material is limited to minor corrections or clarifications of existing versioned material. An errata revision may be backwards incompatible, if the incompatibility is necessary for correct operation of implementations of the versioned material.

#### **Revision History**

Revisions to this document are summarized in Table 1.

Table 1: Revision History

Date	Rev	Notes
18 August 2020	1.2.1	Initial Release
31 October 2020	1.2.1c	Released as SNIA Approved Publication
2 March 2021	1.2.2	Added detailed mapping information to match information in NVMe drive profiles for many new referenced properties, and included guidance for mandatory/recommended implementation as reflected in the profiles.
		Added sections for firmware update, with details for NVMe Drive implementation requirements.
		Added cross-references to User's Guide NVMe-specific use cases.
		Errata fixes – correct diagram, correct table headers.

#### **About SNIA**

The Storage Networking Industry Association (SNIA) is a non-profit organization made up of member companies spanning information technology. A globally recognized and trusted authority, SNIA's mission is to lead the storage industry in developing and promoting vendor-neutral architectures, standards and educational services that facilitate the efficient management, movement and security of information.

### **Acknowledgements**

The SNIA Scalable Storage Management Technical Work Group, which developed and reviewed this work in progress, would like to recognize the significant contributions made by the members listed in 2.

Table 2: Contributors

Member	Representatives (* – prior employer)		
Broadcom Inc.	Richelle Ahlvers*		
Cisco Systems, Inc.	Krishnakumar Gowravaram		
Dell Inc.	David Black		
	Jim Pendergraft		
	Michael Raineri		
Hewlett Packard Enterprise	Curtis Ballard		
	Jeff Hilland		
	Chris Lionetti		
Intel Corporation	Richelle Ahlvers		
	Rajalaxmi Angadi		
	Phil Cayton		
	Slawek Putyrski		
Kioxia	Mark Carlson		
Lenovo	Keith Campbell		
NetApp, Inc.	Don Deel		
	Fred Knight		
Samsung Corporation	Lu Fan		
	Bill Martin		
	Tom Rainey		
VMware, Inc.	Murali Rajagopal		

# 1 Abstract

The Swordfish NVMe Model Overview and Mapping Guide defines the model to manage NVMe and NVMe-oF storage systems with Redfish and Swordfish. It provides the detailed mapping information between the NVMe, NVMe-oF specifications and the Redfish and Swordfish specifications.

## 2 Scope

#### 2.1 Document Goals

This document describes how both the NVMe Subsystem model and the NVMe-oF fabric system model should be mapped consistently to Redfish and Swordfish constructs for implementations to be managed within Redfish and Swordfish management environments.

This model and mapping information does not describe or assert any specific implementation recommendation technologies.

This document also provides the mapping information for properties recommended to be implemented in Redfish/Swordfish for NVMe and NVMe-oF devices and the corresponding reference information from the NVMe and NVMe-oF specifications.

#### 2.2 Audience Assumptions

This document assumes that the reader of this document is familiar with NVMe and NVMe-oF technologies and concepts. It also assumes the reader has knowledge of the Redfish and Swordfish concepts.

# **3 Normative References**

#### 3.1 Overview

The documents listed in Table 3 are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

# 3.2 Approved references

**Table 3:** Approved normative references

Tag	Title (Version)	A uthor	URL
ISO-8601	Data elements and interchange formats  - Information interchange – Representation of dates and times – Part 1: Basic rules	IS O/IEC	<a href="http://www.iso.org/iso/home/store/catalogue_ics/catalogue_detail_ics.htm?csnumber=70907">http://www.iso.org/iso/home/store/catalogue_detail_ics.htm?csnumber=70907</a>
ISO-Direct	ISO/IEC Directives, Part 2 Principles and rules for the structure and drafting of ISO and IEC documents (Eigth Edition, 2018)	IS O/IEC	<pre><https: current="" directives="" index.xhtml="" part2="" sites="" w="" ww.iso.org=""></https:></pre>
Redfish	Redfish Scalable Platforms Management API Specification (v1.11.0)	DMTF	http://www.dmtf.org/sit es/default/files/standards/ documents/DSP0266_1.4.0.pdf
Swordfish	Swordfish Scalable Storage Management API Specification (v1.2.1)	SNIA	<a href="https://www.snia.o">https://www.snia.o</a> rg/tech_activities/standard s/curr_standards/swordfish>

Tag	Title (Version)	A uthor	URL
NVMe	NVMe Spec v1.4a	NVM Ex press	<ht tps://nvmexpress.org/wp-con tent/uploads/NVM-Express-1_ 4a-2020.03.09-Ratified.pdf&gt;</ht 
NVMe-oF	NVMe-oF Spec v1.1	NVM Ex press	<a href="https:/"><a href="https:/"><a href="https://"><a href="https://">&gt;a href="https://"&gt;<a href="https://">&gt;a href="https://"&gt;&gt;a href="https:</a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a></a>

# 3.3 References under development

None defined in this document.

# 3.4 Other references

None defined in this document.

#### 4 NVMe Model Overview

#### 4.1 Introduction

In order to manage NVMe and NVMe-oF devices and systems in a large scale environment, a higher level management ecosystem is needed. The Redfish/Swordfish management specifications are designed to manage multi-system environments, including multiple types of fabrics, covering not only multiple technologies, but also inclusive of system management, storage management and fabric management, making it the ideal ecosystem in which to add not only the integration of NVMe devices for system and storage management, but NVMe-oF for fabric management.

This document describes how both the NVMe Subsystem model and the NVMe-oF fabric system model should be mapped consistently to Redfish and Swordfish constructs for implementations to be managed within Redfish and Swordfish management environments. This model and mapping information does not describe or assert any specific implementation recommendation technologies.

Similar implementations will have similar Redfish and Swordfish constructs. Mockups are used to show static examples of sample representations. Requirements and recommendations for implementations are provided separately through the Swordfish NVMe and NVMe-oF profiles. The profiles use the Redfish interoperability profile schema to specify the required, recommended and optional properties and schema for specific configurations and functionality that correspond to classes of implementations.

#### 4.1.1 Fundamental Model Design Assertions

- There shall be a unified model across all types of NVMe devices.
- There shall not be a different model for "drives" vs other types of NVMe devices
- The model will cover an appropriate level of abstraction for all types of NVMe devices based on modeling and mockups reflected in the documented permutations (e.g., from simple drives through to complex fabric virtual systems)
  - Simple NVMe drives; complex NVMe drives; JBOFs/EBOFs; Arrays/RBOFs
- The logical model for NVMe-oF shall leverage the NVMe Subsystem model
- Logical subsystems, controllers, and namespaces are the same objects with the same relationships as in the NVMe Subystem Model. Unneeded objects are not instantiated (e.g., Endurance Groups, sets)

- The NVMe native model should map to the existing Redfish and Swordfish constructs when and where possible
  - Mapping future NVMe / NVMe-oF functionality should follow this principle when and where possible (e.g., firmware update mapping to the RF update service)

#### 4.2 Overall NVMe Subsystem Model

#### **Key Tenets:**

- Model reflects a unified view of all NVMe device types.
- Devices will instantiate an appropriate subset of the model
- The model diagrams do not reflect all available schema elements.
- Model leverages and coarsely maps to existing (Redfish and) Swordfish storage model

#### 4.2.1 Major NVM Objects Mapped to RF/SF

**4.2.1.1 NVM Subsystem** An NVM subsystem includes one or more controllers, zero or more namespaces, and one or more ports. Examples of NVM subsystems include Enterprise and Client systems that utilize PCI Express based solid state drives and/or fabric connectivity.

# **4.2.1.2 NVM Controller (IO, Admin and Discovery)** The interface between a host and an NVM subsystem

Admin controller: controller that exposes capabilities that allow a host to manage an NVM subsystem

Discovery: controller that exposes capabilities that allow a host to retrieve a Discovery Log Page

I/O: controller that implements I/O queues and is intended to be used to access a non-volatile memory storage medium

**4.2.1.3 Namespace** A quantity of non-volatile memory that may be formatted into logical blocks. When formatted, a namespace of size n is a collection of logical blocks with logical block addresses from 0 to (n-1).

- **4.2.1.4 Endurance Group** A portion of NVM in the NVM subsystem whose endurance is managed as a group
- **4.2.1.5 NVM Set** An NVM Set is a collection of NVM that is separate (logically and potentially physically) from NVM in other NVM Sets.
- **4.2.1.6 NVM Domain** A domain is the smallest indivisible unit that shares state (e.g., power state, capacity information). Domain members can be NVM controllers, endurance groups, sets or namespaces.

#### 4.2.2 Unmapped objects

There are a number of objects that are required for the proper integration of NVMe support within Redfish and Swordfish, but which are not supported by an entity that can be mapped directly from the various NVM Specifications. Information about these related but un-mapped objects are defined elsewhere in the documentation provided with each Swordfish release.

They are summarized in Appendix A.

#### 4.2.3 NVM Subsystem Model

The following diagram reflects the high level mapping of the key NVM objects into Redfish / Swordfish schema objects. These largely follow existing relationships used by the Swordfish storage specification for non-NVMe implementations as well, which provides a great deal of consistency for storage clients, as well as for implementations such as NVMe arrays that may be delivering solutions that combine NVMe and other technologies.

This model covers a wide range of instantiations ranging from individual SSDs, to multi-rack storage systems. All of these can be represented by this NVM Subsystem model, shown in Figure 1.

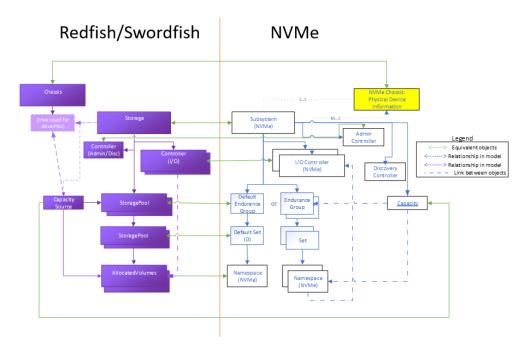


Figure 1: Subsystem model

#### 4.2.4 NVMe-oF Subsystem Model

Figure 2 shows the high level mapping of the key NVMe-oF objects to Redfish / Swordfish schema objects. Following the tenets described in the model overview section, these extend the mapping used in the NVM Subsystem for the logical versions of the objects.

This model also includes the use of the Redfish Fabric model to cover the connectivity aspects of the fabric.

The grey shaded portion of this diagram reflects the logical / exported portion of the NVMe-oF environment represented in Redfish / Swordfish.

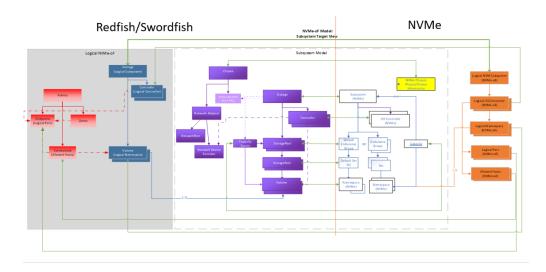


Figure 2: NVMe-oF Subsystem Model

# **5 Example Instances**

#### 5.1 Introduction

This section of the document provides a series of example usages of the model that represent common instantiations of NVMe devices, and how those devices may use the various NVMe, and correspondingly, Redfish and Swordfish objects and schema. This section will not provide comprehensive representations of all potential device types; rather, a representation of several common device types, in order to provide an illustration of the application of the model for those that are unfamiliar with either the NVMe or Redfish / Swordfish ecosystems.

Further, the following sections describe the examples and do not attempt to cover all potential permutations for alternate representations of each device class or possible implementations.

#### 5.2 Simple SSD

#### 5.2.1 Overview

Figure 3 shows a sample representation of a simple NVMe SSD, with a PCIe interface. It is implemented with no endurance group or NVM set functionality; it has only a single namespace capability, and a single IO controller.

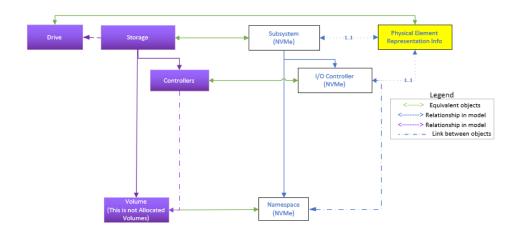


Figure 3: Simple SSD instance diagram

#### 5.2.2 Explanation of Object use

Simple SSDs are SSDs that do not use Endurance Groups or sets. Correspondingly, they only use Storage, Controllers, Volumes (Namespaces), and the Drive schema to represent the fundamental components.

Many SSD implementations support exactly one namespace. These are described by this model, and the mockups reflect this configuration.

This model can also support extensions to cover dual-ported configurations, as well as support for multiple IO controllers per port.

#### 5.2.3 Redfish / Swordfish Object Representation

Figure 4 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

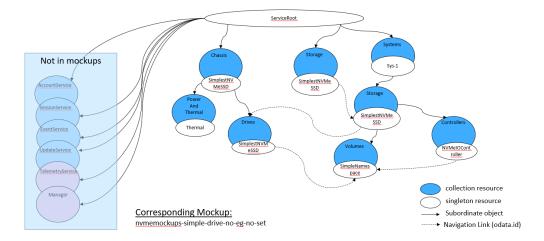


Figure 4: Simple SSD mockup example

#### 5.2.4 Mockup

A corresponding mockup for this configuration can be found at http://swordfishmockups.com/simple-ssd-mockups.

#### 5.3 Complex SSD

#### 5.3.1 Overview

Figure 5 shows a sample representation of a complex NVMe SSD, with a PCIe interface. This example shares many similarities to the simple device model, but adds the representation of NVMe Endurance Groups and NVM Sets using the Swordfish StoragePool schema, with additional NVMe specific properties.

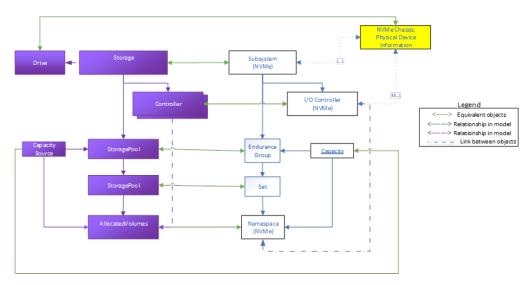


Figure 5: Complex SSD Model

#### 5.3.2 Explanation of Object use

Complex SSDs are SSDs that use Endurance Groups and NVM sets. They also use Storage, Controllers, Volumes (Namespaces), and the Drive schema to represent the fundamental components.

This model can also support extensions to cover dual-ported configurations, as well as support for multiple IO controllers per port.

Endurance Groups divide the media into distinct wear-leveling domains. How this happens is implementation specific.

NVM Sets further subdivide an endurance group in order to limit performance interference within and across these domains.

When this type of device supports dynamic namespace allocation and NVM Sets, the management of the namespaces is done within an NVM Set as the underlying capacity source (e.g., the storage pool).

#### 5.3.3 Redfish / Swordfish Object Representation

Figure 6 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

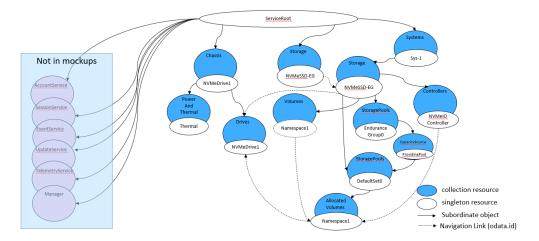


Figure 6: Complex SSD Model

**5.3.3.1 Mockup** A corresponding mockup for this configuration can be found at http://swordfishmockups.com/simple-ssd-eg-set-mockups.

#### 5.4 Simple SSD with IP (NVMe-oF) Attach

#### 5.4.1 Overview

This example reflects an IP-attached drive configuration, with a single ethernet port configured, as illustrated in Figure 7. It includes a drive configured with a default endurance group and NVM Set, and is instantiated in the Storage Collection off the Service Root. The network configuration is modeled in the Chassis.

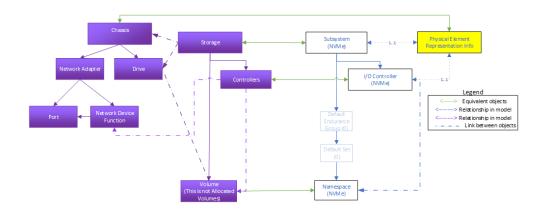


Figure 7: Simple IP-atteched SSD

#### 5.4.2 Explanation of Object use

Simple SSDs with IP attach are also SSDs that do not use Endurance Groups or sets, but that have IP-based network interfaces. Correspondingly, they only use Storage, Controllers, Volumes (Namespaces), and the Drive schema to represent the fundamental components. In addition, they use the Redfish Network Adapter, Port and Network Device Function to model the configuration of the IP interface port(s).

As with the Simple SSD configuration, Many SSD with IP-attach implementations support exactly one namespace. These are described by this model, and the mockups reflect this configuration.

This model can also support extensions to cover multi-ported configurations, as well as support for multiple IO controllers per port.

#### 5.4.3 Redfish / Swordfish Object Representation

Figure 8 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

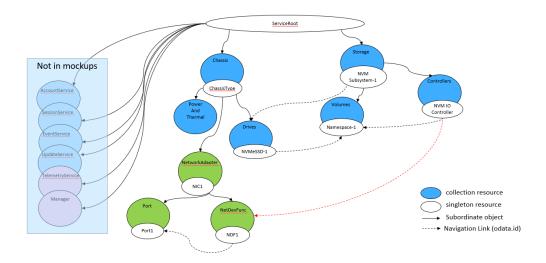


Figure 8: Simple IP-attached SSD mockup

#### 5.4.4 Mockup

A corresponding mockup for this configuration can be found at http://swordfishmockups.com/ethernet-attach-drive-mockups.

#### **5.5 JBOF**

#### 5.5.1 Overview

This example covers a representation of a JBOF ("just a bunch of flash") enclosure and contained drives. This mockup reflects a PCIe front-end attach configuration with a set of drives.

Figure 9 shows only the controller object representation for this JBOF configuration. This includes the admin controller function for enclosure management.

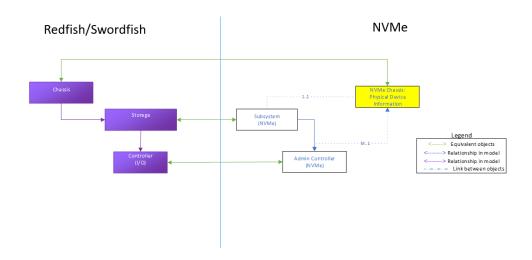


Figure 9: JBOF configuration controller object

Figure 10 shows the combined object representations for the JBOF system, with both the JBOF controller and NVMe drives (using the Simple SSD style drives) represented in the system. Note that the full mockup represented has 7 drives, while this diagram only represents two for the sake of visual clarity.

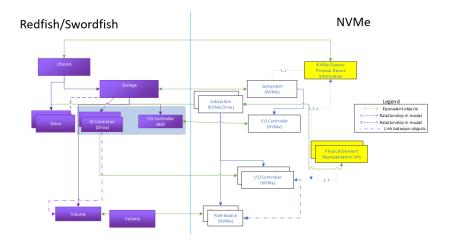


Figure 10: Full JBOF system

#### 5.5.2 Explanation of Object use

This type of JBOF system uses the Chassis, Storage and Controller objects to reflect physical component modeling, Subsystem and Admin Controller functionality.

The Chassis model and Admin controller represent NVM's SES (SCSI enclosure services)

usage.

#### 5.5.3 Redfish / Swordfish Object Representation

Figure 11 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

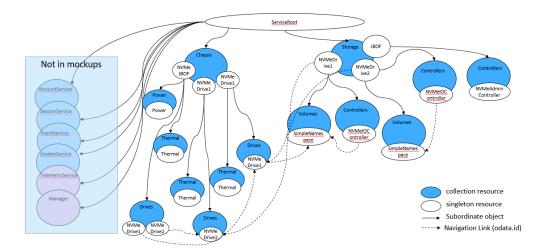


Figure 11: JBOF system instance

#### 5.5.4 Mockup

A corresponding mockup for this configuration can be found at http://swordfishmockups.com/nvme-jbof-mockups

#### 5.6 Opaque Array

#### 5.6.1 Overview

The "opaque" array reflects a system with an NVMe front end, but the internal implementation is vendor specific, and not necessarily presented by the vendor (aka "opaque"). Figure 12 shows a system that presents an NVMe front-end but also exposes a SATA drive backend. This could be done to support both FRU management and volume/namespace creation.

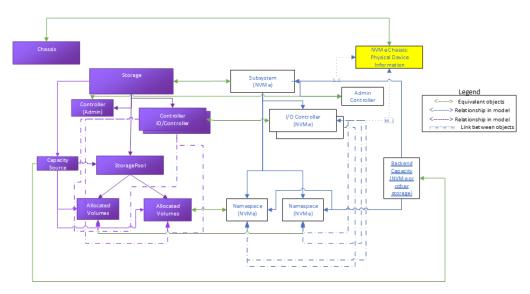


Figure 12: Opaque array example

#### 5.6.2 Explanation of Object use

The opaque array example presents NVMe specific information in Redfish/Swordfish objects, using the Storage, Controller, and Volume objects.

In addition, device management information is presented through StoragePool and Drive objects, providing internal, non-NVMe implementation specific information to the user, for configuration, diagnosis and other storage management functions. (This set of objects is subject to the standard Swordfish specification and profiles.)

#### 5.6.3 Redfish / Swordfish Object Representation

Figure 13 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

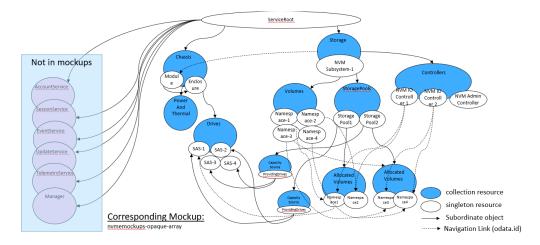


Figure 13: Sample opque system instance

#### 5.6.4 Mockup

A corresponding mockup for this configuration can be found at http://swordfishmockups.com/nvme-opaque-array-mockups.

## 5.7 Subsystem (Fabric) Model - NVMe-oF: Fabric Attach Subsystem

#### 5.7.1 Overview

Figure 14 shows a logical/exported NVMe-oF subsystem presenting one logical subsystem, one I/O controller, one namespace, one port and representing one allowed host, using the Redfish Fabric model. The fabric model uses the Connection schema to characterize the allowed host information, and Endpoints and Zones to show the network connectivity from the device's perspective.

This example also includes NVMeDomains. NVMeDomains contain a collection of domain members; these can be NVM controllers, endurance groups, NVM sets, or namespaces.

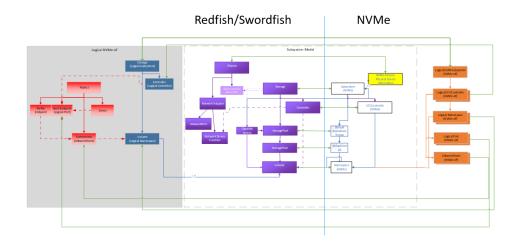


Figure 14: NVMe-OF subsystem example

## 5.7.2 Explanation of Object use

The fabric attach subsystem example shows the representation of logical, or exported, subsystems, controllers, and namespaces using the Storage, Controller and Volume objects respectively.

It also uses portions of the Redfish fabric model to represent the host attachment information - allowed hosts and logical port - using the Connections and Endpoints objects respectively.

## 5.7.3 Redfish / Swordfish Object Representation

Figure 15 shows the representation, as expressed in the mockup indicated below, of a sample instantiation using Redfish / Swordfish objects.

Note that this mockup does not represent a complete service instantiation; it contains only objects of interest for this context.

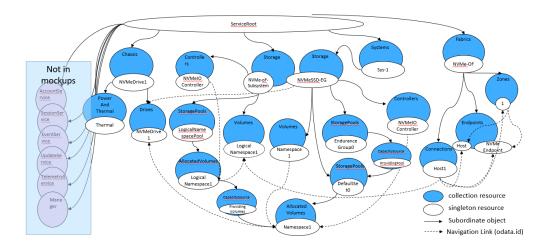


Figure 15: NVMe-oF system instance

#### 5.7.4 Mockup

A corresponding mockup for this configuration can be found at http://swordfishmockups.com/nvmeof-mockups.

## 5.8 NVMe Domains

## 5.8.1 Overview

This example describes NVMeDomains. NVMeDomains contain a collection of domain members; these can be NVM controllers, endurance groups, NVM sets, namespaces, and ports, as illustrated in Figure 16.

Domains are used to subdivide an NVM Subsystem. For example, if there are multiple power sources, the domain is used to represent the scope of each power source.

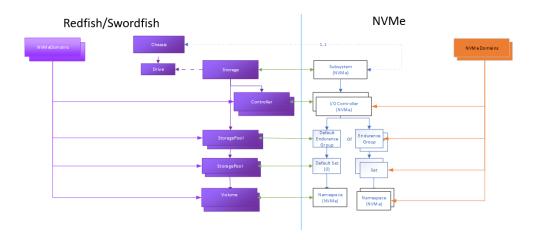


Figure 16: NVMeDomain example

## 5.8.2 Explanation of Object use

The domain object contains two primary elements: the domain members collection, which contains pointers to the relevant controllers, groups, sets, namespaces, and ports that reflect the appropriate subdivision for the purpose of the domain.

The other primary element includes a set of capacity information properties about this set of domain members.

## 5.8.3 Mockup

A corresponding mockup for this configuration can be found at http://swordfishmockups.com/nvmeof-mockups.

# **6 Property Mapping**

#### 6.1 Introduction

The property mapping provided defines the preferred translation between the Redfish/Swordfish schema objects and properties, and the corresponding NVMe and NVMe-oF specification properties. The information is ordered within the Redfish/Swordfish objects; each cross-referenced property within the Redfish/Swordfish structure therefore contains a detailed reference to its mapped property in the NVMe ecosystem.

Each section also includes a sample Redfish/Swordfish mockup presenting an example usage for that object.

## **6.2 Property Mapping Template**

Table 4 provides the template and an example for the property mapping provided in the following sections of this document.

For each property (whether a reference, collection, complex type or actual property), there is a comparison between the property in Redfish/Swordfish to the corresponding property in either the NVMe or NVMe-oF specification. The RF/SF property is provided within its schema context; the NVMe/NVMe-oF specification reference is provided within the table, showing both which specification, as well as the section and, if appropriate, the figure in which the property is specified.

Similarly, the type of each property is correspondingly specified. The RF/SF type is specified, and the NVM Spec property type is shown, as well as, where appropriate, any additional identifying information, such as byte offset and data structure.

The Mandatory field is used to specify whether properties are Mandatory or Optional on the NVMe specification side, and in the rare instance where properties are Mandatory in the Redfish/Swordfish schema. (Recommended / required properties for specific implementation types in Redfish/Swordfish will be done separately, through the use of profiles.)

The Notes field can / will be used to include any relevant information about either the purpose of the property, additional context, or other useful information to implementers, such as inter-relationships with other properties.

**Table 4:** Property Mapping Template and Example

	Re dfish/Swordfish	NVMe / NVMe-oF
Property	Redfish / Swordfish Schema Property: R ecommendedArbit rationBurstSize	NVM Spec Property / Field: Recommended ArbitrationBurst(RAB) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2, Figure 249
Type	Redfish / Swordfish Schema Type: String	NVM Spec Property Type: Power of 2: 2^n Additional NVM Spec Identifying Information: ByteOffset: 72, IdentifyController data structure
Description	The Recommended Arbitration Burst Size indicates the maximum number of commands that the controller may launch at one time from a particular Submission Queue.	This is the recommended Arbitration Burst size. The value is in commands and is reported as a power of two (2^n). This is the same units as the Arbitration Burst size.

	Re dfish/Swordfish	NVMe / NVMe-of
LongDescription	This property shall	
	contain the	
	Recommended	
	Arbitration Burst	
	Size indicates the	
	maximum number	
	of commands that	
	the controller may	
	launch at one time	
	from a particular	
	Submission Queue.	
	The value is	
	expressed as a	
	power of two (e.g.,	
	000b indicates one,	
	011b indicates	
	eight). A value of	
	111b indicates no	
	limit.	
Mandatory		Mandatory
Notes		

## 6.3 NVM subsystem

The Redfish/Swordfish Storage schema is used to represent an NVM Subsystem.

#### 6.3.1 Mockup

The following mockup shows a sample representation of the Storage schema used to represent an NVM Subysystem.

```
"@Redfish.Copyright": "Copyright 2014-2020 SNIA. All rights reserved.",
"@odata.id": "/redfish/v1/Storage/NVMe-oF-Subsystem",
"@odata.type": "#Storage.v1_9_0.Storage",
"Id": "1",
"Name": "NVMe-oF Logical NVM Fabric System",
"Description": "Mockup of NVMe-oF Logical NVM Fabric System with 1 Logical
\hookrightarrow Subsystem, 1 Logical I/O Controller and 1 Logical port and 1 allowed
→ host.",
"Status": {
  "State": "Enabled",
  "Health": "OK",
  "HealthRollup": "OK"
"Identifiers": [{
  "DurableNameFormat": "NQN",
  "DurableName":
  → "nqn.2014-08.org.nvmexpress:uuid:6c5fe566-10e6-4fb6-aad4-8b4159f50245"
}],
"Controllers": {
  "@odata.id": "/redfish/v1/Storage/NVMe-oF-Subsystem/Controllers"
},
"Volumes": {
 "@odata.id":
  → "/redfish/v1/Storage/NVMe-oF-Subsystem/Volumes/LogicalNamespace1"
}
```

# **6.3.2 Property Mapping**

**6.3.2.1 Actions.#StorageController.SetEncryptionKey** The mapping for Actions.#StorageController.SetEncryptionKey is summarized in Table 5.

 Table 5: Actions.#StorageController.SetEncryptionKey mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Actions.#St orageController. SetEncryptionKey	N/A
Туре	Action (Special form of POST)	
Description	The available OEM-specific actions for this resource.	
LongDescription	This property shall contain the available OEM-specific actions for this resource.	
Mandatory	Do not implement (for NVMe Drives).	
Notes		N/A for NVMe (Drives). Drives will generate their own key for CryptoErase, this requires passing a new key.

# **6.3.2.2 Controllers** The mapping for Controllers is summarized in Table 6.

**Table 6:** Controllers mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Controllers	Controllers
Туре	StorageContr ollerCollection.	Controller list.
Description	The set of controllers instantiated by this storage subsystem.	A list of controller identifiers in the NVM subsystem that may or may not be attached to namespace(s)
LongDescription	This property shall contain a link to a Resource of type StorageCont rollerCollection that contains the set of storage controllers allocated to this instance of an storage subsystem.	A Controller List (refer to NVMe Bese Specification section 4.11) of up to 2,047 controller identifiers is returned containing a controller identifier greater than or equal to the value specified in the Controller Identifier (CDW10.CNTID) field. The list contains controller identifiers in the NVM subsystem that may or may not be attached to namespace(s).
Mandatory	No	No (see note)

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	This is a collection of Sto rageControllers. Refer to the S torageController schema for details of the instance information. These are used to provide information on NVM IO, Admin and Discovery controllers.	This property is only mandatory for controllers that support the Namespace Management capability - reference NVMe Base Specification section 5.15.2.9 Controller list (CNS 13h)

# **6.3.2.3 Description** The mapping for Description is summarized in Table 7.

**Table 7:** Description mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Type	String	N/A
Description	The description of this resource.	N/A
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specifi cation-described requirements.	N/A
Mandatory	Yes	N/A

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	In Redfish,	Return the common
	Description is a	description: "An NVM
	read-only field.	Express Subsystem is an
		NVMe device that contains
		one or more NVM Express
		controllers and may contain
		one or more namespaces."

# **6.3.2.4 Drives** The mapping for Drives is summarized in Table 8.

Table 8: Drives mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Drives	NVM Spec Property Field: NVM Spec: Section:Figure
Туре	Collect ion(Drive.Drive)	
Description	The set of drives attached to the storage controllers that this resource represents.	N/A
LongDescription	This property shall contain a set of the drives attached to the storage controllers that this resource represents.	
Mandatory	Required (for NVMe Drives)	
Notes	For NVMe Drive implementation, this links to "Drive" object, which contains the physical representation of NVMe Drive information.	

# **6.3.2.5 Identifiers** The mapping for Identifiers is summarized in Table 9.

Table 9: Identifiers mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	NVM Subsystem NVMe Qualified Name (SUBNQN)
Туре	Collection(Reso urce.Identifier)	An array of identifiers
Description	The Durable names for the subsystem.	An array of identifiers
LongDescription	This property shall contain a list of all known durable names for the associated subsystem.	This specifies the NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string. Refer to NVMe Base Specification, section 7.9, for the definition of NVMe Qualified Name. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).
Mandatory	Yes	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	This is an array of unique identifiers for the NVM Subsystem.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

# **6.3.2.6 Identifiers.DurableNameFormat** The mapping for Identifiers.DurableNameFormat is summarized in Table 10.

**Table 10:** Identifiers.DurableNameFormat mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers.D urableNameFormat	NVM Subsystem NVMe Qualified Name (SUBNQN)
Type	Re source.v1_1_0.D urableNameFormat	There is a single value for this array in Subsystem. The property type is of type NVMe Qualified Name (NQN).
Description	The format of the Durable names for the subsystem.	NVM Subsystem NVMe Qualified Name (SUBNQN)
LongDescription	This specifies the format of the associated NVM Subsystem NVMe Qualified Name of type NQN. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).	
Mandatory	No	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	This is an enum with multiple potential values. For this particular usage in Subsystem, there will only be one instance populated, of type NQN.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

# **6.3.2.7 Identifiers.DurableName** The mapping for Identifiers.DurableName is summarized in Table 11.

Table 11: Identifiers. Durable Name mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identif iers.DurableName	NVM Subsystem NVMe Qualified Name (SUBNQN)
Туре	Edm.String	The NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string
Description	The format of the Durable names for the subsystem.	NVM Subsystem NVMe Qualified Name (SUBNQN)
LongDescription	This specifies the NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string. Refer to NVMe Base Specification, section 7.9, for the definition of NVMe Qualified Name. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).	
Mandatory	No	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	For this particular usage in Subsystem, there will only be one instance populated in the identifiers array.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

**6.3.2.8 Links.Enclosures** The mapping for Links.Enclosures is summarized in Table 12.

Table 12: Links. Enclosures mapping

R edfish/Swordfish  NVMe / NVMe-oF  Links.Enclosures  NVM Spec Property Field: NVM Spec: Section:Figure  Type  Collection( Chassis.Chassis)  Description  An array of links to the chassis to which this storage subsystem is attached.  LongDescription  This property shall contain an array of links to resources of type Chassis that represent the physical containers attached to this resource.  Mandatory  Required			
Type  Collection( Chassis.Chassis)  Description  An array of links to the chassis to which this storage subsystem is attached.  LongDescription  This property shall contain an array of links to resources of type Chassis that represent the physical containers attached to this resource.		R edfish/Swordfish	NVMe / NVMe-oF
Chassis.Chassis)  Description  An array of links to N/A the chassis to which this storage subsystem is attached.  LongDescription  This property shall contain an array of links to resources of type Chassis that represent the physical containers attached to this resource.	Property	Links.Enclosures	-
the chassis to which this storage subsystem is attached.  LongDescription  This property shall contain an array of links to resources of type Chassis that represent the physical containers attached to this resource.	Туре	•	
contain an array of links to resources of type Chassis that represent the physical containers attached to this resource.	Description	the chassis to which this storage subsystem is	N/A
Mandatory Required	LongDescription	contain an array of links to resources of type Chassis that represent the physical containers attached to this	
	Mandatory	Required	

	R edfish/Swordfish NVMe / NVMe-
Notes	For NVMe Drive
	implementation,
	this links to a
	chassis collection
	that contains the
	subsystem's "Drive"
	object, which
	contains the
	physical
	representation of
	NVMe Drive
	information.

**6.3.2.9 Links.Enclosures@odata.count** The mapping for Links.Enclosures@odata.count is summarized in Table 13.

Table 13: Links.Enclosures@odata.count mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	Links.Enclosures@odata.countt	
Туре	(odata property)int64	
Description	Count of the number of items in the Links.Enclosures array.	
LongDescription		
Mandatory	Required	
Notes		

**6.3.2.10 Links.SimpleStorage** The mapping for Links.SimpleStorage is summarized in Table 14.

Table 14: Links. SimpleStorage mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Lin ks.SimpleStorage	NVM Spec Property / Field: NVM Spec: Section:Figure
Туре	SimpleStora ge.SimpleStorage	
Description	The link to the simple storage instance that corresponds to this storage.	N/A
LongDescription	This property shall contain a link to a resource of type SimpleStorage that represents the same storage subsystem as this resource.	
Mandatory	Do not implement	
Notes		

# **6.3.2.11 Name** The mapping for Name is summarized in Table 15.

Table 15: Name mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Name	NVM Subsystem NVMe Qualified Name (SUBNQN)
Туре	String	String

	R edfish/Swordfish	NVMe / NVMe-oF
Description	The name of the resource or array member.	Uniquely describes the NVM subsystem.
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	The NVM Subsystem NVMe Qualified Name is a UTF-8 null-terminated string used (e.g., by host software) as the unique identifier for the NVM subsystem
Mandatory	Yes	Yes (see note)

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	In Redfish, Name is a	Support for this field is
	read-only field.	mandatory if the controller
		supports revision 1.2.1 or
		later as indicated in the
		Version register (refer to
		section 3.1.2). Reported in
		the NVM Subsystem NVMe
		Qualified Name field of the
		Identify Controller data
		structure, bytes 1023:768
		(refer to figure 249 in
		section 5.15.2.1 of the
		NVMe Base Specification). I
		the NVM Subsystem NVMe
		Qualified Name field of the
		Identify Controller data
		structure is not supported,
		then all bytes of this field
		shall be cleared to 0h. Refe
		to NVMe Base Specification
		section 7.9 for the
		definition of NVMe
		Qualified Name. Refer to
		NVMe Base Specifiction
		section 7.11 for details on
		the Unique Identifier,
		including compatibility
		with older versions of NVMe
		Controllers that do not
		support NVM Subsystem
		NQNs.

# **6.3.2.12 Status.State** The mapping for Status. State is summarized in Table 16.

**Table 16:** Status. State mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.State	N/A
Туре	Resource.State (enum)	N/A
Description	The known state of the resource, such as, enabled.	N/A

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	indicate whether	
	and why this	
	component is	
	available. Enabled	
	indicates the	
	resource is available.	
	Disabled indicates	
	the resource has	
	been intentionally	
	made unavailable	
	but it can be	
	enabled. Offline	
	indicates the	
	resource is	
	unavailable	
	intentionally and	
	requires action to	
	make it available.	
	InTest indicates that	
	the component is	
	undergoing testing.	
	Starting indicates	
	that the resource is	
	becoming available.	
	Absent indicates the	
	resource is	
	physically	
	unavailable.	
Mandatory	No	No
,		

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values:	There is no simple
	Enabled / Disabled /	corresponding property or
	StandbyOffline /	mappable set of
	StandbySpare /	information at this time.
	InTest / Starting /	Current guidance is do not
	Absent / Una	implement this property.
	vaialableOffline /	Guidance will be added in a
	Deferring / Quiesced	future version of this
	/ Updating /	document as this is an
	Qualified	important concept for
		clients and for consistency
		with traditional storage
		devices.

**6.3.2.13 Status.Health** The mapping for Status.Health is summarized in Table 17.

Table 17: Status. Health mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.Health	Critical Warning Condition
Туре	Resource.Health	Boolean
Description	The health state of this resource in the absence of its dependent resources.	Indicates the NVM subsystem has detected a condition that causes at least one of bits 0 to 4 in the Critical Warning field of the SMART / Health Information log (refer to NVMe Base Specification section 5.14.1.2) to be set to one.
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	Bits in this field represent the associated state at the time of this event. The Additional Hardware Error Information field shall be set at the time of the event using the same format as is specified for the Critical Warning field of the SMART, Health Information.
Mandatory	Yes	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible Values: OK / Warning / Critical	Returned as a Critical Warning Condition (code 06h) in the NVM Subsystem Hardware Error Event data (bytes 01:00) of an NVM Subsystem Hardware Error Event (Event Type 05h) in the Persistent Event Log. Reverence NVMe Base Specification 5.14.1.13.1.5 NVM Subsystem Hardware Error Event (Event Type 05h), Figure 221 and Figure 222.

**6.3.2.14 Status.HealthRollup** The mapping for Status.HealthRollup is summarized in Table 18.

Table 18: Status. Health Rollup mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Sta tus.HealthRollup	Critical Warning
Туре	Resource.Health	Boolean
Description	The overall health state from the view of this resource.	Indicates the NVM subsystem reliability has been degraded due to significant media related errors or any internal error that degrades NVM subsystem reliability.
LongDescription	This property shall represent the health state of the resource and its dependent resources. The values shall conform to those defined in the Redfish Specification.	Indicates if the NVM subsystem reliability has been degraded due to significant media related errors or any internal error that degrades NVM subsystem reliability. Critical warnings regarding the health of the NVM subsystem may be indicated via an asynchronous event notification to the host. The warnings that results in an asynchronous event notification to the host are configured using the Set Features command; refer to section 5.21.1.11.
Mandatory	Yes	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible Values: OK / Warning / Critical	Returned in byte 00, bit 1 of the Get Log Page – SMART / Health Information Log. Reference the NVMe Base Specification section 5.14.1.2 - SMART / Health Information (Log Identifier
		02h), Figure 196.

**6.3.2.15 StorageControllers** The mapping for StorageControllers is summarized in Table 19.

Table 19: StorageControllers mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	St orageControllers	NVM Spec Property / Field: NVM Spec: Section:Figure
Туре	Storage.St orageControllers	
Description	The set of storage controllers that this resource represents.	N/A
LongDescription	This property shall contain a set of the storage controllers that this resource represents.	
Mandatory	Do not implement	
Notes	Deprecated for NVMe use - replaced by Controllers (type Stora geController.Sto rageController).	

**6.3.2.16 StorageGroups** The mapping for StorageGroups is summarized in Table 20.

Table 20: StorageGroups mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	StorageGroups	NVM Spec Property Field: NVM Spec: Section:Figure
Туре	StorageGr oup.StorageGroup	
Description	All of the storage groups, each of which contains a set of volumes and endpoints that are managed as a group for mapping and masking, that belong to this storage subsystem.	N/A
LongDescription	This property shall contain a link to a resource collection of type StorageG roupsCollection. This property shall be used when implementing mapping and masking.	
Mandatory	Do not implement	
Notes	N/A for NVMe use cases. Deprecated by Connections.	

# **6.3.2.17 Volumes** The mapping for Volumes is summarized in Table 21.

Table 21: Volumes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Volumes	Allocated Namespace ID list
Туре	V olumeCollection. VolumeCollection	List of namespace IDs
Description	The set of volumes instantiated by this storage subsystem.	A list of Allocated Namespaces for this Subsystem
LongDescription	This property shall contain a link to a Resource of type VolumeCollection that contains the set of storage volumes allocated to this instance of an storage subsystem.	A list of namespace IDs is returned to the host containing allocated NSIDs in increasing order.
Mandatory	No	No
Notes	This is a collection of Namespaces that belong to this NVM Subsystem. Refer to the Volume schema for details of the instance information.	Reference NVMe Base Specification section 5.15.2.6 Allocated Namespace ID list (CNS 10h).

# **6.4 NVM Controllers**

The Redfish/Swordfish StorageControllers schema is used to represent an NVM Controller.

There are three different types of NVM Controllers: Admin, Discovery, and IO.

#### **6.4.1 Admin Controller**

**6.4.1.1 Mockup** The following mockup shows a sample representation of the StorageController schema used to represent an Admin Controller.

```
{
  "@Redfish.Copyright": "Copyright 2014-2020 SNIA. All rights reserved.",
  "@odata.id":
  \  \, \hookrightarrow \  \, \text{"/redfish/v1/Storage/OpaqueArray/Controllers/NVMeAdminController"},
  "@odata.type": "#StorageController.v1_0_0.StorageController",
  "Name": "NVMe Admin Controller",
  "Description": "Single NVMe Admin Controller for in-band admin command

→ access.",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
  "Id": "NVMeAdminController",
  "Manufacturer": "Best NVMe Vendor",
  "Model": "NVMe Connect Array",
  "SerialNumber": "NVME123456",
  "PartNumber": "NVM44",
  "FirmwareVersion": "1.0.0",
  "SupportedControllerProtocols": [
    "PCIe"
 ],
  "NVMeControllerProperties": {
    "ControllerType": "Admin",
    "NVMeVersion": "1.3",
    "NVMeControllerAttributes": {
      "SupportsSQAssociations": false,
      "SupportsTrafficBasedKeepAlive": false,
      "SupportsExceedingPowerOfNonOperationalState": false,
      "Supports128BitHostId": false
    }
}
```

### 6.4.1.2 Property Mapping

### **6.4.1.2.1 Assembly** The mapping for Assembly is summarized in Table 22.

Table 22: Assembly mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Assembly	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	ComplexType	N/A
Description	The Assembly schema defines an assembly. Assembly information contains details about a device, such as part number, serial number, manufacturer, and production date. It also provides access to the original data for the assembly.	N/A

	R edfish/Swordfish	NVMe / NVMe-of
		TVVIVE / TVVIVE-OI
LongDescription	This Resource shall	N/A
	represent an	
	assembly for a	
	Redfish	
	implementation.	
	Assembly	
	information	
	contains details	
	about a device, such	
	as part number,	
	serial number,	
	manufacturer, and	
	production date. It	
	also provides access	
	to the original data	
	for the assembly.	
Mandatory	Do Not Implement	
	for NVMe Drives.	
Notes		

# **6.4.1.2.2 AssetTag** The mapping for AssetTag is summarized in Table 23.

Table 23: Assembly mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	AssetTag	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Type	Edm.String	N/A
Description	The user-assigned asset tag for this storage controller.	N/A
LongDescription	This property shall track the storage controller for inventory purposes.	N/A
Mandatory	Do Not Implement for NVMe Drives.	
Notes		

# **6.4.1.2.3 CacheSummary** The mapping for CacheSummary is summarized in Table 24.

Table 24: CacheSummary mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	CacheSummary	N/A
Туре	ComplexType	N/A
Description	The cache memory of the storage controller in general detail.	N/A
LongDescription	This property shall contain properties that describe the cache memory for this resource.	N/A
Mandatory	Do Not Implement	
Notes		

# **6.4.1.2.4 ControllerRates** The mapping for ControllerRates is summarized in Table 25.

Table 25: ControllerRates mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	ControllerRates	N/A
Type	ComplexType	N/A
Description	This property describes the various controller rates used for processes such as volume rebuild or consistency checks.	N/A
LongDescription	This object shall contain all the rate settings available on the controller.	N/A
Mandatory	Do Not Implement	
Notes		

# **6.4.1.2.5 Description** The mapping for Description is summarized in Table 26.

Table 26: Description mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Туре	String	
Description	The description of this resource.	
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specifi cation-described requirements.	
Mandatory	Optional	N/A
Notes	In Redfish, Description is a read-only field.	Return the common description: "An NVM Admin Controller exposes capabilities that allow a host to manage an NVM subsystem. Admin controllers support commands providing management capabilities but does not provide IO access."

# **6.4.1.2.6 FirmwareVersion** The mapping for FirmwareVersion is summarized in Table 27.

Table 27: Firmware Version mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	FirmwareVersion	NVM Spec Property / Field: IdentifyController: Firmare Revision (FR) NVM Spec: Section:Figure 249: 71:64
Туре	String	
Description	The firmware version of this storage controller.	
LongDescription	This property shall contain the firmware version as defined by the manufacturer for the associated storage controller.	
Mandatory	Required.	
Notes		Return the currently active firmware revision information.

# **6.4.1.2.7 Identifiers** The mapping for Identifiers is summarized in Table 28.

Table 28: Identifiers mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	Controller Identifier list
Туре	Collection(Reso urce.Identifier)	A variable length Controller Identifier structures
Description	The Durable names for the storage controller.	
LongDescription	This property shall contain a list of all known durable names for the associated storage controller.	
Mandatory	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	No
Notes		

**6.4.1.2.8 Identifiers.DurableName** The mapping for Identifiers.DurableName is summarized in Table 29.

Table 29: Identifiers. Durable Name mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identif iers.DurableName	
Туре	Variable - see notes	Variable - see notes
Description	The Durable names for the storage controller.	Durable Controller Identifier
LongDescription	Т	
Mandatory	Recommend not implementing.	No
Notes	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	

**6.4.1.2.9 Identifiers.DurableNameFormat** The mapping for Identifiers.DurableNameFormat is summarized in Table 30.

 Table 30:
 Identifiers.DurableNameFormat mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers.D urableNameFormat	
- ype	enum (Du rableNameFormat)	
Description	The Durable names for the storage controller.	
ongDescription	This property shall contain a list of the types for all known durable names for the associated storage controller. The type determines the length of the corresponding Namespace ID	
landatory	Recommend not implementing.	No
lotes	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	

**6.4.1.2.10 Links.AttachedVolumes** The mapping for Links.AttachedVolumes is summarized in Table 31.

Table 31: Links. Attached Volumes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Links .AttachedVolumes	N/A
Туре	Collectio n(Volume.Volume)	N/A
Description	An array of links to volumes that are attached to this controller instance.	
LongDescription	This property shall contain a link to the Resources of type Volume that are attached to this instance of storage controller.	
Mandatory	Do not implement (for admin controllers).	Yes
Notes		

# **6.4.1.2.11 Location** The mapping for Location is summarized in Table 32.

Table 32: Location mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Location	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	Collection(Re source.Location)	
Description	The location of the storage controller.	
LongDescription	This property shall contain location information of the associated storage controller.	N/A
Mandatory	Do Not Implement for NVM Drives.	
Notes		

**6.4.1.2.12 Manufacturer** The mapping for Manufacturer is summarized in Table 33.

Table 33: Manufacturer mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Manufacturer	
Туре	String	
Description	The manufacturer of this storage controller.	
LongDescription	This property shall contain the name of the organization responsible for producing the storage controller. This organization might be the entity from whom the storage controller is purchased, but this is not necessarily true.	
Mandatory	Recommended	
Notes		End clients expect to see the name of the company (e.g.; Contoso, BestVendor) While the value may be filled from the IdentifyController PCI Vendor ID or SubsystemID field, it would be preferable to have this filled with the actual string value of the company name.

## **6.4.1.2.13 Model** The mapping for Model is summarized in Table 34.

Table 34: Model mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Model	NVM Spec Property / Field: IdentifyController / Model Number (MN) NVM Spec: Section: Figure 249 byte 24:63
Туре	String	N/A
Description	The model number for the storage controller.	
LongDescription	This property shall contain the name by which the manufacturer generally refers to the storage controller.	N/A
Mandatory	Recommended	
Notes		

**6.4.1.2.14 Name** The mapping for Name is summarized in Table 35.

Table 35: Name mapping

Section 5.15.2.2 (IdentifyController), Figure 249  Type  String  NVM Spec Property Type 16-bit hex value Addition NVM Spec Identifying		R edfish/Swordfish	NVMe / NVMe-oF
16-bit hex value Addition NVM Spec Identifying Information: ByteOffset: 79:78, IdentifyController data structure  Description The name of the resource or array member.  LongDescription This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	Property	Name	Field: Controller ID (CNTLID) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure
resource or array member.  LongDescription  This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	Туре	String	<b>Information:</b> ByteOffset: 79:78, IdentifyController
represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	Description	resource or array	
Mandatory Required Mandatory	LongDescription	represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word	
	Mandatory	Required	Mandatory

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	In Redfish, Name is a read-only field.	Map the CNTLID field to a string with the format: "0xABCD"

**6.4.1.2.15 NVMeControllerProperties.ControllerType** The mapping for NVMeControllerProperties.ControllerType is summarized in Table 36.

**Table 36:** NVMeControllerProperties.ControllerType mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeCon trollerPropertie s.ControllerType	N/A
Туре	StorageContr oller.v1_0_0.NV MeControllerType	NVM Spec Property Type:
Description	This property specifies the type of NVMe Controller.	
LongDescription	This property shall specify the type of NVMe Controller.	
Mandatory		
Notes	This property must be used to specify the type of NVMe Controller. For an admin controller, set to Admin.	Return "Admin"

**6.4.1.2.16 NVMeControllerProperties.NVMeVersion** The mapping for NVMeControllerProperties.NVMeVersion is summarized in Table 37.

Table 37: NVMeControllerProperties.NVMeVersion mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMe ControllerProper ties.NVMeVersion	NVM Spec Property / Field: Version (VER) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	String	NVM Spec Property Type: Maps from register 3.1.2. Additional NVM Spec Identifying Information: ByteOffset: 83:90
Description	The version of the NVMe Base Specification supported.	
LongDescription	This property shall specify the type of NVMe Controller.	
Mandatory		Mandatory
Notes		Implementations compliant to revision 1.2 or later of this specification shall report a non-zero value in this field. Map from corresponding value in register 3.1.2 to string as "1.0", "1.1", "1.2", "1.2.1", "1.3.0", "1.4.0", etc.

### ${\bf 6.4.1.2.17\ NVMeController Properties. NVMeController Attributes. Supports SQAssociations}$

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsSQAssociations is summarized in Table 38.

**Table 38:**NVMeControllerProperties.NVMeControllerAttributes. SupportsSQAssociations mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeCont rollerProperties .NVMeControllerA ttributes.Suppor tsSQAssociations	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 8 (SQ Associations) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 8 of Byte 99:96
Description	Indicates whether or not the controller supports SQ Associations.	
LongDescription	This property shall indicate whether or not the controller supports SQ Associations.	
Mandatory		
Notes		

### ${\bf 6.4.1.2.18\ NVMeController Properties. NVMeController Attributes. Supports Traffic Based Keep A live}$

The mapping for NVMeControllerProperties.NVMeControllerAttributes.TrafficBasedKeepAlive is summarized in Table 39.

Table 39:

 ${\tt NVMeControllerProperties.NVMeControllerAttributes. Supports Traffic Based Keep Alive mapping}$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerP roperties.NVMeCo ntrollerAttribut es.SupportsTraff icBasedKeepAlive	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 6 (Traffic Based Keep Alive Support – TBKAS) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 6 of Byte 99:96
Description	Indicates whether or not the controller supports restarting KeepAlive Timer if traffic is processed from an admin command or IO during KeepAlive Timeout interval.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	indicate whether or	
	not the controller	
	supports restarting	
	KeepAlive Timer if	
	traffic is processed	
	from an admin	
	command or IO	
	during KeepAlive	
	Timeout interval.	
Mandatory		
Notes		

## $\textbf{6.4.1.2.19} \ \ \textbf{NVMeControllerProperties.NVMeControllerAttributes.} Supports \textbf{ExceedingPowerOfNonOperation} \\ \textbf{Accounts of the properties of the pro$

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOp is summarized in Table 40.

**Table 40:** NVMeControllerProperties.NVMeControllerAttributes. SupportsExceeding-PowerOfNonOperationalState mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControlle rProperties.NVMe ControllerAttrib utes.SupportsExc eedingPowerOfNon OperationalState	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 1 (Non-Operational Power State Permissive Mode) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 1 of Byte 99:96
Description	Indicates whether or not the controller supports exceeding Power of NonOperational State in order to execute controller initiated background operations in a non-operational power state.	

	R edfish/Swordfish	NVMe / NVMe-of
LongDescription	This property shall	
	indicate whether or	
	not the controller	
	supports exceeding	
	Power of	
	NonOperational	
	State in order to	
	execute controller	
	initiated	
	background	
	operations in a	
	non-operational	
	power state.	
Mandatory		
Notes		

#### 6.4.1.2.20 NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId

The mapping for NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId is summarized in Table 41.

**Table 41:**NVMeControllerProperties.NVMeControllerAttributes. Supports128BitHostId mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeCo ntrollerProperti es.NVMeControlle rAttributes.Supp orts128BitHostId	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 0 NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 0 of Byte 99:96
Description	Indicates whether or not the controller supports a 128-bit Host Identifier.	
LongDescription	This property shall indicate whether or not the controller supports a 128-bit Host Identifier.	
Mandatory		
Notes		

**6.4.1.2.21 NVMeControllerProperties.MaxQueueSize** The mapping for NVMeControllerProperties.MaxQueueSize is summarized in Table 42.

 Table 42:
 NVMeControllerProperties.ANACharacteristics mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeC ontrollerPropert ies.MaxQueueSize	NVM Spec Property / Field: Maximum Queues Entries Supported (MQES) NVM Spec: Section:Figure NVMe 1.4a; Section 3.1.1 Controller Capabilities; Figure 69
Туре	Int64	NVM Spec Property Type: Additional NVM Spec Identifying Information: ByteOffset: Bits 15:00
Description	Indicates the maximum individual queue size that an NVMe IO Controller supports.	

	R edfish/Swordfish NVM	le / NVMe-oF
LongDescription	This property shall	
	contain the	
	maximum individual	
	queue entry size	
	supported per	
	queue. This is a	
	zero-based value,	
	where the minimum	
	value is one,	
	indicating two	
	entries. For PCIe,	
	this applies to both	
	submission and	
	completion queues.	
	For NVMe-oF, this	
	applies to only	
	submission queues.	
Mandatory		
Notes		

**6.4.1.2.22 NVMeControllerProperties.MaxQueueSize** The mapping for NVMeControllerProperties.ANACharacteristics is summarized in Table 43.

 Table 43:
 NNVMeControllerProperties.ANACharacteristics mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControl lerProperties.AN ACharacteristics	
Туре	Collecti on(StorageContro ller.v1_0_0.ANA Characteristics)	
Description	This property contains the combination of ANA type and volume information.	
LongDescription	This property shall contain the combination of ANA type and volume information.	
Mandatory		
Notes		

### ${\bf 6.4.1.2.23\ NVMeController Properties. NVMeSMARTC ritical Warnings. Overall System Degraded}$

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSystemDegraded is summarized in Table 44.

Table 44:

 ${\tt NVMeControllerProperties.NVMeSMARTCriticalWarnings.}\ Overall System Degraded mapping$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeCont rollerProperties .NVMeSMARTCritic alWarnings.Overa llSystemDegraded	NVM Spec Property / Field: Critical Warning NVM Spec: Section:Figure NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 2 of Byte 00
Description	Indicates that the NVM subsystem reliability has been compromised.	
LongDescription	This property shall indicate that the NVM subsystem reliability has been compromised.	
Mandatory	Required	
Notes		

# **6.4.1.2.24 SKU** The mapping for SKU is summarized in Table 45.

Table 45: SKU mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	SKU	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	Edm.String	N/A
Description	The SKU for this storage controller.	N/A
LongDescription	This property shall contain the stock-keeping unit number for this storage controller.	N/A
Mandatory	Do Not Implement	
Notes		

## **6.4.1.2.25 SpeedGbps** The mapping for SpeedGbps is summarized in Table 46.

Table 46: SpeedGbps mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	SpeedGbps	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	Decimal	N/A
Description	The maximum speed of the storage controller's device interface.	N/A
LongDescription	This property shall represent the maximum supported speed of the storage bus interface, in Gbit/s. The specified interface connects the controller to the storage devices, not the controller to a host. For example, SAS bus not PCIe host bus.	N/A
Mandatory	Do Not Implement	
Notes		

**6.4.1.2.26 Status.Health** The mapping for Status.Health is summarized in Table 47.

Table 47: Status. Health mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.Health	NVM Spec Property / Field: CSTS – Controller Status NVM Spec: Section:Figure NVMe 1.4a: Section 3.1.6, Figure 79 NVM Spec Property / Field: Critical Warning NVM Spec: Section:Figure NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Туре	Resource.Health	NVM Spec Property Type:
Description	The health state of this resource in the absence of its dependent resources.	
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
Mandatory		

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible Values: OK /	This comes from CSTS
	Warning / Critical	Controller Failure Status,
		and from the SMART /
		health information log
		critical warning field.

# **6.4.1.2.27 Status.State** The mapping for Status. State is summarized in Table 48.

Table 48: Status. State mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.State	NVM Spec Property / Field: CSTS – Controller Status NVM Spec: Section:Figure NVMe 1.4a: Section 3.1.6, Figure 79
Type	Resource.State (enum)	NVM Spec Property Type:
Description	The known state of the resource, such as, enabled.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	indicate whether	
	and why this	
	component is	
	available. Enabled	
	indicates the	
	resource is available.	
	Disabled indicates	
	the resource has	
	been intentionally	
	made unavailable	
	but it can be	
	enabled. Offline	
	indicates the	
	resource is	
	unavailable	
	intentionally and	
	requires action to	
	make it available.	
	InTest indicates that	
	the component is	
	undergoing testing.	
	Starting indicates	
	that the resource is	
	becoming available.	
	Absent indicates the	
	resource is	
	physically	
	unavailable.	
Mandatory		Mandatory

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values:	Ready (CSTS.RDY) maps to
	Enabled / Disabled /	Enabled, Shutdown
	StandbyOffline /	(CSTS.SHST) value will tell
	StandbySpare /	you if shutdown is in
	InTest / Starting /	progress or complete
	ABsent / Una	(StandbyOffline),
	vaialableOffline /	ProcessingPaused
	Deferring / Quiesced	(CSTS.PP) maps to
	/ Updating /	Deferring. If both Ready and
	Qualified	Shutdown are indicated,
		then the system should
		indicate StandbyOffline. If
		both Ready and
		ProcessingPaused are
		indicated, then the system
		should indicate Deferring.

**6.4.1.2.28 SupportedControllerProtocols** The mapping for SupportedControllerProtocols is summarized in Table 49.

Table 49: SupportedControllerProtocols mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	SupportedCon trollerProtocols	N/A
Туре	Collection(Pr otocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The supported set of protocols for communicating to this storage controller.	
LongDescription	This property shall contain the supported set of protocols for communicating to this storage controller.	
Mandatory	Required.	
Notes	This is an array of protocols supported by the St orageController. This can be set to values including, but not limited to, PCIe, RDMA, NVMe-oF, RoCE, RoCEv2, and InfiniBand.	

**6.4.1.2.29 SupportedDeviceProtocols** The mapping for SupportedDeviceProtocols is summarized in Table 50.

 Table 50:
 Supported Device Protocols mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Supporte dDeviceProtocols	N/A
Туре	Collection(Pr otocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The protocols that the storage controller can use to communicate with attached devices.	
LongDescription	This property shall contain the set of protocols this storage controller can use to communicate with attached devices.	
Mandatory		
Notes	Do not implement.	

#### **6.4.2 Discovery Controller**

**6.4.2.1 Mockup** The following mockup shows a sample representation of the StorageController schema used to represent a Discovery Controller.

```
{
  "@Redfish.Copyright": "Copyright 2014-2020 SNIA. All rights reserved.",
  "@odata.id":
  → "/redfish/v1/Storage/NVMe-oF-Subsystem/Controllers/NVMeIOController",
  "@odata.type": "#StorageController.v1_0_0.StorageController",
  "Id": "9",
  "Name": "NVMe Logical Discovery Controller",
  "Description": "Single NVMe Discovery Controller presented to host.",
  "Status": {
   "State": "Enabled",
    "Health": "OK"
 },
  "Id": "NVMeDiscoveryController",
  "SupportedControllerProtocols": [
   "TCP", "RDMA", "FC"
 ],
  "SupportedDeviceProtocols": [
    "NVMeOverFabrics"
 ],
  "NVMeControllerProperties": {
    "ControllerType": "Discovery",
    "NVMeVersion": "1.3",
    "NVMeControllerAttributes": {
      "SupportsTrafficBasedKeepAlive": false,
     "SupportsExceedingPowerOfNonOperationalState": false,
      "Supports128BitHostId": false
   }
 }
}
```

## 6.4.2.2 Property Mapping

## **6.4.2.2.1 Assembly** The mapping for Assembly is summarized in Table 51.

Table 51: Assembly mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Assembly	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	ComplexType	N/A
Description	The Assembly schema defines an assembly. Assembly information contains details about a device, such as part number, serial number, manufacturer, and production date. It also provides access to the original data for the assembly.	N/A

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This Resource shall	N/A
	represent an	
	assembly for a	
	Redfish	
	implementation.	
	Assembly	
	information	
	contains details	
	about a device, such	
	as part number,	
	serial number,	
	manufacturer, and	
	production date. It	
	also provides access	
	to the original data	
	for the assembly.	
Mandatory	Do Not Implement	
	for NVMe Drives.	
Notes		

# **6.4.2.2.2 AssetTag** The mapping for AssetTag is summarized in Table 52.

Table 52: Assembly mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	AssetTag	NVM Spec Property / Field: N/A NVM Spec: Section:Figure N/A
Туре	Edm.String	N/A
Description	The user-assigned asset tag for this storage controller.	N/A
LongDescription	This property shall track the storage controller for inventory purposes.	N/A
Mandatory	Do Not Implement for NVMe Drives.	
Notes		

**6.4.2.2.3 CacheSummary** The mapping for CacheSummary is summarized in Table 53.

Table 53: CacheSummary mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	CacheSummary	N/A
Туре	ComplexType	N/A
Description	The cache memory of the storage controller in general detail.	N/A
LongDescription	This property shall contain properties that describe the cache memory for this resource.	N/A
Mandatory	Do Not Implement	
Notes		

# **6.4.2.2.4 ControllerRates** The mapping for ControllerRates is summarized in Table 54.

Table 54: ControllerRates mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	ControllerRates	N/A
Туре	ComplexType	N/A
Description	This property describes the various controller rates used for processes such as volume rebuild or consistency checks.	N/A
LongDescription	This object shall contain all the rate settings available on the controller.	N/A
Mandatory	Do Not Implement	
Notes		

## **6.4.2.2.5 Description** The mapping for Description is summarized in Table 55.

Table 55: Description mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Type	String	
Description	The description of this resource.	
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specifi cation-described requirements.	
Mandatory	Optional	N/A
Notes	In Redfish,  Description is a  read-only field.	Return the common description: "An NVM Discovery Controller exposes capabilities that allow a host to retrieve information required to connect to one or more NVM Subsystems. Discovery controllers only support commands providing discovery capabilities; they do not provide IO or management access."

**6.4.2.2.6 FirmwareVersion** The mapping for FirmwareVersion is summarized in Table 56.

**Table 56:** FirmwareVersion mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	FirmwareVersion	NVM Spec Property / Field: IdentifyController: Firmare Revision (FR) NVM Spec: Section:Figure 249: 71:64
Туре	String	
Description	The firmware version of this storage controller.	
LongDescription	This property shall contain the firmware version as defined by the manufacturer for the associated storage controller.	
Mandatory	Required.	
Notes		Return the currently active firmware revision information.

# **6.4.2.2.7 Identifiers** The mapping for Identifiers is summarized in Table 57.

Table 57: Identifiers mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	Controller Identifier list
Туре	Collection(Reso urce.Identifier)	A variable length Controller Identifier structures

	R edfish/Swordfish	NVMe / NVMe-oF
Description	The Durable names for the storage controller.	
LongDescription	This property shall contain a list of all known durable names for the associated storage controller.	
Mandatory	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	No
Notes		

**6.4.2.2.8 Identifiers.DurableName** The mapping for Identifiers.DurableName is summarized in Table 58.

Table 58: Identifiers. Durable Name mapping

R edfish/Swordfish	NVMe / NVMe-oF
Identif iers.DurableName	
Variable - see notes	Variable - see notes
The Durable names for the storage controller.	Durable Controller Identifier
	Identif iers.DurableName Variable - see notes The Durable names for the storage

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	Т	
Mandatory	Recommend not implementing.	No
Notes	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	

**6.4.2.2.9 Identifiers.DurableNameFormat** The mapping for Identifiers.DurableNameFormat is summarized in Table 59.

**Table 59:** Identifiers.DurableNameFormat mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers.D urableNameFormat	
Туре	enum (Du rableNameFormat)	
Description	The Durable names for the storage controller.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain a list of the types for all known durable names for the associated storage controller. The type determines the length of the corresponding	
Mandatory	Recommend not implementing. Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name	No

# **6.4.2.2.10 Links.AttachedVolumes** The mapping for Links.AttachedVolumes is summarized in Table 60.

Table 60: Links. Attached Volumes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Links .AttachedVolumes	N/A
Туре	Collectio n(Volume.Volume)	N/A

	R edfish/Swordfish	NVMe / NVMe-oF
Description	An array of links to volumes that are attached to this controller instance.	
LongDescription	This property shall contain a link to the Resources of type Volume that are attached to this instance of storage controller.	
Mandatory	Do not implement.	Yes
Notes		

**6.4.2.2.11 Links.Endpoints** The mapping for Links.Endpoints is summarized in Table 61.

Table 61: Links.Endpoints mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Links.Endpoints	N/A
Туре	Collection(En dpoint.Endpoint)	
Description	An array of links to the endpoints that connect to this controller.	
LongDescription	This property shall contain an array of links to the Resources of type Endpoint associated with this controller.	
Mandatory		
Notes		

**6.4.2.2.12 Links.Connections** The mapping for Links.Connections is summarized in Table 62.

Table 62: Links. Connections mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	L inks.Connections	N/A
Туре	C ollection(Connec tion.Connection)	
Description	An array of links to volumes that are attached to this controller instance.	
LongDescription	This property shall contain a link to the Resources of type Volume that are attached to this instance of storage controller.	
Mandatory		
Notes	This contains the information used to represented the allowed hosts.	This property contains pointers to the Connections objects. The information about allowed hosts is mapped to the Connections objects for NVMe-oF configurations.

**6.4.2.2.13 Location** The mapping for Location is summarized in Table 63.

Table 63: Location mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Location	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	Collection(Re source.Location)	
Description	The location of the storage controller.	
LongDescription	This property shall contain location information of the associated storage controller.	N/A
Mandatory	Do Not Implement for NVM Drives.	
Notes		

**6.4.2.2.14 Manufacturer** The mapping for Manufacturer is summarized in Table 64.

Table 64: Manufacturer mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Manufacturer	
Туре	String	
Description	The manufacturer of this storage controller.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	contain the name of	
	the organization	
	responsible for	
	producing the	
	storage controller.	
	This organization	
	might be the entity	
	from whom the	
	storage controller is	
	purchased, but this	
	is not necessarily	
	true.	
Mandatory	Optional	
Notes		End clients expect to see
		the name of the company
		(e.g,; Contoso, BestVendor)
		While the value may be
		filled from the
		IdentifyController PCI
		Vendor ID or SubsystemID
		field, it would be preferable
		to have this filled with the
		actual string value of the
		company name.

**6.4.2.2.15 Model** The mapping for Model is summarized in Table 65.

Table 65: Model mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Model	NVM Spec Property / Field: IdentifyController / Model Number (MN) NVM Spec: Section: Figure 249 byte 24:63
Туре	String	N/A
Description	The model number for the storage controller.	
LongDescription	This property shall contain the name by which the manufacturer generally refers to the storage controller.	N/A
Mandatory	Optional	
Notes		

# **6.4.2.2.16 Name** The mapping for Name is summarized in Table 66.

Table 66: Name mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Name	NVM Spec Property / Field: Controller ID (CNTLID) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	String	NVM Spec Property Type: 16-bit hex value Additional NVM Spec Identifying Information: ByteOffset: 79:78, IdentifyController data structure
Description	The name of the resource or array member.	
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	
Mandatory	Required	Mandatory

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	In Redfish, Name is a read-only field.	Map the CNTLID field to a string with the format: "0xABCD"

**6.4.2.2.17 NVMeControllerProperties.ControllerType** The mapping for NVMeControllerProperties.ControllerType is summarized in Table 67.

Table 67: NVMeControllerProperties.ControllerType mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeCon trollerPropertie s.ControllerType	N/A
Туре	StorageContr oller.v1_0_0.NV MeControllerType	NVM Spec Property Type:
Description	This property specifies the type of NVMe Controller.	
LongDescription	This property shall specify the type of NVMe Controller.	
Mandatory	Required property when Discovery controller is implemented.	Discovery controllers are strongly recommended in Ethernet-Attached NVMe Drives.
Notes	This property must be used to specify the type of NVMe Controller. For a discovery controller, set to Discovery.	Return "Discovery"

**6.4.2.2.18 NVMeControllerProperties.NVMeVersion** The mapping for NVMeControllerProperties.NVMeVersion is summarized in Table 68.

Table 68: NVMeControllerProperties.NVMeVersion mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMe ControllerProper ties.NVMeVersion	NVM Spec Property / Field: Version (VER) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	String	NVM Spec Property Type: Maps from register 3.1.2. Additional NVM Spec Identifying Information: ByteOffset: 83:90
Description	The version of the NVMe Base Specification supported.	
LongDescription	This property shall specify the type of NVMe Controller.	
Mandatory		Mandatory
Notes		Implementations compliant to revision 1.2 or later of this specification shall report a non-zero value in this field. Map from corresponding value in register 3.1.2 to string as "1.0", "1.1", "1.2", "1.2.1", "1.3.0", "1.4.0", etc.

## ${\bf 6.4.2.2.19\ NVMeController Properties. NVMeController Attributes. Supports Traffic Based Keep A live}$

The mapping for NVMeControllerProperties.NVMeControllerAttributes.TrafficBasedKeepAlive is summarized in Table 69.

Table 69:

 ${\tt NVMeControllerProperties.NVMeControllerAttributes. Supports Traffic Based Keep Alive mapping}$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerP roperties.NVMeCo ntrollerAttribut es.SupportsTraff icBasedKeepAlive	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 6 (Traffic Based Keep Alive Support – TBKAS) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 6 of Byte 99:96
Description	Indicates whether or not the controller supports restarting KeepAlive Timer if traffic is processed from an admin command or IO during KeepAlive Timeout interval.	

	R edfish/Swordfish	NVMe / NVMe-oF
_ongDescription	This property shall	
	indicate whether or	
	not the controller	
	supports restarting	
	KeepAlive Timer if	
	traffic is processed	
	from an admin	
	command or IO	
	during KeepAlive	
	Timeout interval.	
Mandatory	Required for	
	Ethernet-Attach	
	NVMe Drives.	
Votes		

## $\textbf{6.4.2.2.20} \ \ \textbf{NVMeControllerProperties.NVMeControllerAttributes.} Supports \textbf{ExceedingPowerOfNonOperation} \\ \textbf{Accounts of the properties of the pro$

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOp is summarized in Table 70.

**Table 70:** NVMeControllerProperties.NVMeControllerAttributes. SupportsExceeding-PowerOfNonOperationalState mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControlle rProperties.NVMe ControllerAttrib utes.SupportsExc eedingPowerOfNon OperationalState	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 1 (Non-Operational Power State Permissive Mode) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 1 of Byte 99:96
Description	Indicates whether or not the controller supports exceeding Power of NonOperational State in order to execute controller initiated background operations in a non-operational power state.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	indicate whether or	
	not the controller	
	supports exceeding	
	Power of	
	NonOperational	
	State in order to	
	execute controller	
	initiated	
	background	
	operations in a	
	non-operational	
	power state.	
Mandatory		
Notes		

#### 6.4.2.2.21 NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId

The mapping for NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId is summarized in Table 71.

**Table 71:**NVMeControllerProperties.NVMeControllerAttributes. Supports128BitHostId mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeCo ntrollerProperti es.NVMeControlle rAttributes.Supp orts128BitHostId	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 0 NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 0 of Byte 99:96
Description	Indicates whether or not the controller supports a 128-bit Host Identifier.	
LongDescription	This property shall indicate whether or not the controller supports a 128-bit Host Identifier.	
Mandatory		
Notes		

**6.4.2.2.22 NVMeControllerProperties.MaxQueueSize** The mapping for NVMeControllerProperties.MaxQueueSize is summarized in Table 72.

Table 72: NVMeControllerProperties.ANACharacteristics mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeC ontrollerPropert ies.MaxQueueSize	NVM Spec Property / Field: Maximum Queues Entries Supported (MQES) NVM Spec: Section:Figure NVMe 1.4a; Section 3.1.1 Controller Capabilities; Figure 69
Туре	Int64	NVM Spec Property Type: Additional NVM Spec Identifying Information: ByteOffset: Bits 15:00
Description	Indicates the maximum individual queue size that an NVMe IO Controller supports.	

	R edfish/Swordfish NVM	le / NVMe-oF
LongDescription	This property shall	
	contain the	
	maximum individual	
	queue entry size	
	supported per	
	queue. This is a	
	zero-based value,	
	where the minimum	
	value is one,	
	indicating two	
	entries. For PCIe,	
	this applies to both	
	submission and	
	completion queues.	
	For NVMe-oF, this	
	applies to only	
	submission queues.	
Mandatory		
Notes		

#### 6.4.2.2.23 NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSubsystemDegraded

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSubsystemDegraded is summarized in Table 73.

**Table 73:**NVMeControllerProperties.NVMeSMARTCriticalWarnings. OverallSubsystemDegraded mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControl lerProperties.NV MeSMARTCriticalW arnings.OverallS ubsystemDegraded	NVM Spec Property / Field: Critical Warning NVM Spec: Section:Figure NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 2 of Byte 00
Description	Indicates that the NVM subsystem reliability has been compromised.	
LongDescription	This property shall indicate that the NVM subsystem reliability has been compromised.	
Mandatory	Required	
Notes		

mapping

## 6.4.2.2.24 NVMeControllerProperties.NVMeSMARTCriticalWarnings.SpareCapacityWornOut

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.SpareCapacityWornOut is summarized in Table 74.

**Table 74:** NVMeControllerProperties.NVMeSMARTCriticalWarnings. SpareCapacityWornOut

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeCon trollerPropertie s.NVMeSMARTCriti calWarnings.Spar eCapacityWornOut	NVM Spec Property / Field: Critical Warning NVM Spec: Section:Figure NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 0 of Byte 00
Description	Indicates that the available spare capacity has fallen below the threshold.	
LongDescription	This property shall indicate that the available spare capacity has fallen below the threshold.	
Mandatory	Required	
Notes		

**6.4.2.2.5 Status. Health** The mapping for Status. Health is summarized in Table 75.

Table 75: Status. Health mapping

Status.Health	NVM Spec Property / Field: CSTS – Controller Status NVM Spec: Section:Figure NVMe 1.4a: Section 3.1.6, Figure 79 NVM Spec Property / Field: Critical Warning NVM Spec: Section:Figure NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Resource.Health	NVM Spec Property Type:
The health state of this resource in the absence of its dependent resources.	
This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
	Resource.Health The health state of this resource in the absence of its dependent resources. This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible Values: OK /	This comes from CSTS
	Warning / Critical	Controller Failure Status,
		and from the SMART /
		health information log
		critical warning field.

# **6.4.2.2.26 Status.State** The mapping for Status. State is summarized in Table 76.

Table 76: Status. State mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.State	NVM Spec Property / Field: CSTS – Controller Status NVM Spec: Section:Figure NVMe 1.4a: Section 3.1.6, Figure 79
Туре	Resource.State (enum)	NVM Spec Property Type:
Description	The known state of the resource, such as, enabled.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	indicate whether	
	and why this	
	component is	
	available. Enabled	
	indicates the	
	resource is available.	
	Disabled indicates	
	the resource has	
	been intentionally	
	made unavailable	
	but it can be	
	enabled. Offline	
	indicates the	
	resource is	
	unavailable	
	intentionally and	
	requires action to	
	make it available.	
	InTest indicates that	
	the component is	
	undergoing testing.	
	Starting indicates	
	that the resource is	
	becoming available.	
	Absent indicates the	
	resource is	
	physically	
	unavailable.	
Mandatory		Mandatory

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values:	Ready (CSTS.RDY) maps to
	Enabled / Disabled /	Enabled, Shutdown
	StandbyOffline /	(CSTS.SHST) value will tell
	StandbySpare /	you if shutdown is in
	InTest / Starting /	progress or complete
	ABsent / Una	(StandbyOffline),
	vaialableOffline /	ProcessingPaused
	Deferring / Quiesced	(CSTS.PP) maps to
	/ Updating /	Deferring. If both Ready and
	Qualified	Shutdown are indicated,
		then the system should
		indicate StandbyOffline. If
		both Ready and
		ProcessingPaused are
		indicated, then the system
		should indicate Deferring.

**6.4.2.2.7 SupportedControllerProtocols** The mapping for SupportedControllerProtocols is summarized in Table 77.

Table 77: SupportedControllerProtocols mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	SupportedCon trollerProtocols	N/A
Туре	Collection(Pr otocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The supported set of protocols for communicating to this storage controller.	
LongDescription	This property shall contain the supported set of protocols for communicating to this storage controller.	
Mandatory	Required.	
Notes	This is an array of protocols supported by the St orageController. This can be set to values including, but not limited to, PCIe, RDMA, NVMe-oF, RoCE, RoCEv2, and InfiniBand.	

**6.4.2.2.8 SupportedDeviceProtocols** The mapping for SupportedDeviceProtocols is summarized in Table 78.

 Table 78:
 Supported Device Protocols mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Supporte dDeviceProtocols	N/A
Туре	Collection(Pr otocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The protocols that the storage controller can use to communicate with attached devices.	
LongDescription	This property shall contain the set of protocols this storage controller can use to communicate with attached devices.	
Mandatory		
Notes	Do not implement.	

#### 6.4.3 IO Controller

**6.4.3.1 Mockup** The following mockup shows a sample representation of the StorageController schema used to represent an IO Controller.

```
{
  "@Redfish.Copyright": "Copyright 2014-2020 SNIA. All rights reserved.",
  "@odata.id":
  → "/redfish/v1/Storage/NVMe-oF-Subsystem/Controllers/NVMeIOController",
  "@odata.type": "#StorageController.v1_0_0.StorageController",
  "Id": "9",
  "Name": "NVMe Logical I/O Controller",
  "Description": "Single NVMe I/O Controller presented to host.",
  "Status": {
    "State": "Enabled",
    "Health": "OK"
 },
  "Id": "NVMeIOController",
  "SupportedControllerProtocols": [
    "TCP", "RDMA", "FC"
  ],
  "SupportedDeviceProtocols": [
    "NVMeOverFabrics"
  ],
  "NVMeControllerProperties": {
    "NVMeVersion": "1.3",
    "NVMeControllerAttributes": {
      "ReportsUUIDList": false,
      "SupportsSQAssociations": false,
      "ReportsNamespaceGranularity": false,
      "SupportsTrafficBasedKeepAlive": false,
      "SupportsPredictableLatencyMode": false,
      "SupportsEnduranceGroups": false,
      "SupportsReadRecoveryLevels": false,
      "SupportsNVMSets": false,
      "SupportsExceedingPowerOfNonOperationalState": false,
      "Supports128BitHostId": false
    },
    "ANACharacteristics": [{
      "AccessState": "Optimized",
      "Volume": {
```

```
"@odata.id":
        → "/redfish/v1/Systems/Sys-1/Storage/NVMeSSD-EG/Volumes/Namespace1"
     }
   }]
  },
  "Links": {
    "AttachedVolumes": [{
     "@odata.id":
      → "/redfish/v1/Systems/Sys-1/Storage/NVMeSSD-EG/Volumes/Namespace1"
   }],
    "Endpoints": [{
       "@odata.id": "/redfish/v1/Fabrics/NVMe-oF/Endpoints/NVMeEndpoint"
     },
       "@odata.id": "/redfish/v1/Fabrics/NVMe-oF/Endpoints/Host"
      }
    ],
    "Connections": [{
     "@odata.id": "/redfish/v1/Fabrics/NVMe-oF/Connections/Host1"
   }]
  }
}
```

#### 6.4.3.2 Property Mapping

#### **6.4.3.2.1 Assembly** The mapping for Assembly is summarized in Table 79.

Table 79: Assembly mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Assembly	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	ComplexType	N/A
Description	The Assembly schema defines an assembly. Assembly information contains details about a device, such as part number, serial number, manufacturer, and production date. It also provides access to the original data for the assembly.	N/A

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This Resource shall	N/A
	represent an	
	assembly for a	
	Redfish	
	implementation.	
	Assembly	
	information	
	contains details	
	about a device, such	
	as part number,	
	serial number,	
	manufacturer, and	
	production date. It	
	also provides access	
	to the original data	
	for the assembly.	
Mandatory	Do Not Implement	
	for NVMe Drives.	
Notes		

## **6.4.3.2.2 AssetTag** The mapping for AssetTag is summarized in Table 80.

Table 80: Assembly mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	AssetTag	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	Edm.String	N/A
Description	The user-assigned asset tag for this storage controller.	N/A
LongDescription	This property shall track the storage controller for inventory purposes.	N/A
Mandatory	Do Not Implement for NVMe Drives.	
Notes		

**6.4.3.2.3 CacheSummary** The mapping for CacheSummary is summarized in Table 81.

Table 81: CacheSummary mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	CacheSummary	N/A
Туре	ComplexType	N/A
Description	The cache memory of the storage controller in general detail.	N/A
LongDescription	This property shall contain properties that describe the cache memory for this resource.	N/A
Mandatory	Do Not Implement	
Notes		

# **6.4.3.2.4 ControllerRates** The mapping for ControllerRates is summarized in Table 82.

Table 82: ControllerRates mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	ControllerRates	N/A
Type	ComplexType	N/A
Description	This property describes the various controller rates used for processes such as volume rebuild or consistency checks.	N/A
LongDescription	This object shall contain all the rate settings available on the controller.	N/A
Mandatory	Do Not Implement	
Notes		

### **6.4.3.2.5 Description** The mapping for Description is summarized in Table 83.

Table 83: Description mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Type	String	
Description	The description of this resource.	
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specifi cation-described requirements.	
Mandatory	Required	N/A
Notes	In Redfish,  Description is a  read-only field.	Return the common description: "An NVM IO controller is a general-purpose controller that provides access to logical block data and metadata stored on an NVM subsystem's non-volatile storage medium. IO Controllers may also support management capabilities."

**6.4.3.2.6 FirmwareVersion** The mapping for FirmwareVersion is summarized in Table 84.

Table 84: Firmware Version mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	FirmwareVersion	NVM Spec Property / Field: IdentifyController: Firmare Revision (FR) NVM Spec: Section:Figure 249: 71:64
Туре	String	
Description	The firmware version of this storage controller.	
LongDescription	This property shall contain the firmware version as defined by the manufacturer for the associated storage controller.	
Mandatory	Required.	
Notes		Return the currently active firmware revision information.

## **6.4.3.2.7 Identifiers** The mapping for Identifiers is summarized in Table 85.

Table 85: Identifiers mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	Controller Identifier list
Туре	Collection(Reso urce.Identifier)	A variable length Controller Identifier structures

	R edfish/Swordfish	NVMe / NVMe-oF
Description	The Durable names for the storage controller.	
LongDescription	This property shall contain a list of all known durable names for the associated storage controller.	
Mandatory	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	No
Notes		

**6.4.3.2.8 Identifiers.DurableName** The mapping for Identifiers.DurableName is summarized in Table 86.

Table 86: Identifiers.DurableName mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identif iers.DurableName	
Туре	Variable - see notes	Variable - see notes
Description	The Durable names for the storage controller.	Durable Controller Identifier

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	Т	
Mandatory	Recommend not implementing.	No
Notes	Recommend not implementing. There isn't a good mapping for these in the NVMe spec to a property that has an appropriate / mapping to a durable name format.	

**6.4.3.2.9 Identifiers.DurableNameFormat** The mapping for Identifiers.DurableNameFormat is summarized in Table 87.

 Table 87: Identifiers.DurableNameFormat mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers.D urableNameFormat	
Туре	enum (Du rableNameFormat)	
Description	The Durable names for the storage controller.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain a list of the types for all known durable names for the associated storage controller. The type determines the length of the corresponding Namespace ID	
Mandatory Notes	Recommend not implementing.  Recommend not implementing.  There isn't a good mapping for these in the NVMe spec to a property that has an appropriate /	No
	mapping to a durable name format.	

**6.4.3.2.10 Links.AttachedVolumes** The mapping for Links.AttachedVolumes is summarized in Table 88.

Table 88: Links. Attached Volumes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Links .AttachedVolumes	N/A
Туре	Collectio n(Volume.Volume)	N/A
Description	An array of links to volumes that are attached to this controller instance.	
LongDescription	This property shall contain a link to the Resources of type Volume that are attached to this instance of storage controller.	
Mandatory	Required.	Yes
Notes	This contains a pointer to the set of namespaces attached to this IO Controller.	

**6.4.3.2.11 Links.Endpoints** The mapping for Links.Endpoints is summarized in Table 89.

Table 89: Links.Endpoints mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Links.Endpoints	N/A
Туре	Collection(En dpoint.Endpoint)	
Description	An array of links to the endpoints that connect to this controller.	
LongDescription	This property shall contain an array of links to the Resources of type Endpoint associated with this controller.	
Mandatory		
Notes	For NVMe-oF configurations.	

**6.4.3.2.12 Links.Connections** The mapping for Links.Connections is summarized in Table 6.4.3.2.12.

Table: Links.Connections mapping

#### **6.4.3.2.13 Location** The mapping for Location is summarized in Table 90.

Table 90: Location mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Location	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	Collection(Re source.Location)	
Description	The location of the storage controller.	
LongDescription	This property shall contain location information of the associated storage controller.	N/A
Mandatory	Do Not Implement for NVM Drives.	
Notes		

**6.4.3.2.14 Manufacturer** The mapping for Manufacturer is summarized in Table 91.

Table 91: Manufacturer mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Manufacturer	
Туре	String	
Description	The manufacturer of this storage controller.	
LongDescription	This property shall contain the name of the organization responsible for producing the storage controller. This organization might be the entity from whom the storage controller is purchased, but this is not necessarily true.	
Mandatory	Required	
Notes		End clients expect to see the name of the company (e.g.; Contoso, BestVendor) While the value may be filled from the IdentifyController PCI Vendor ID or SubsystemID field, it would be preferable to have this filled with the actual string value of the company name.

### **6.4.3.2.15 Model** The mapping for Model is summarized in Table 92.

Table 92: Model mapping

	D adfish/Swardfish	NIVMa / NIVMa a F
	R edfish/Swordfish	NVMe / NVMe-oF
Property	Model	NVM Spec Property / Field: IdentifyController / Model Number (MN) NVM Spec: Section: Figure 249 byte 24:63
Туре	String	N/A
Description	The model number for the storage controller.	
LongDescription	This property shall contain the name by which the manufacturer generally refers to the storage controller.	N/A
Mandatory	Required	
Notes		

**6.4.3.2.16 Name** The mapping for Name is summarized in Table 93.

Table 93: Name mapping

Section 5.15.2.2 (IdentifyController), Figure 249  Type  String  NVM Spec Property Type 16-bit hex value Addition NVM Spec Identifying		R edfish/Swordfish	NVMe / NVMe-oF
16-bit hex value Addition NVM Spec Identifying Information: ByteOffset: 79:78, IdentifyController data structure  Description The name of the resource or array member.  LongDescription This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	Property	Name	Field: Controller ID (CNTLID) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure
resource or array member.  LongDescription  This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	Туре	String	<b>Information:</b> ByteOffset: 79:78, IdentifyController
represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	Description	resource or array	
Mandatory Required Mandatory	LongDescription	represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word	
	Mandatory	Required	Mandatory

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	In Redfish, Name is a read-only field.	Map the CNTLID field to a string with the format: "0xABCD"

**6.4.3.2.17 NVMeControllerProperties.ControllerType** The mapping for NVMeControllerProperties.ControllerType is summarized in Table 94.

**Table 94:** NVMeControllerProperties.ControllerType mapping

R edfish/Swordfish	NVMe / NVMe-oF
NVMeCon trollerPropertie s.ControllerType	N/A
StorageContr oller.v1_0_0.NV MeControllerType	NVM Spec Property Type:
This property specifies the type of NVMe Controller.	
This property shall specify the type of NVMe Controller.	
Required	
This property must be used to specify the type of NVMe Controller. For an IO controller, set to IO.	Return "IO"
	NVMeCon trollerPropertie s.ControllerType StorageContr oller.v1_0_0.NV MeControllerType This property specifies the type of NVMe Controller. This property shall specify the type of NVMe Controller. Required This property must be used to specify the type of NVMe Controller. For an IO

**6.4.3.2.18 NVMeControllerProperties.NVMeVersion** The mapping for NVMeControllerProperties.NVMeVersion is summarized in Table 95.

**Table 95:** NVMeControllerProperties.NVMeVersion mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMe ControllerProper ties.NVMeVersion	NVM Spec Property / Field: Version (VER) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	String	NVM Spec Property Type: Maps from register 3.1.2. Additional NVM Spec Identifying Information: ByteOffset: 83:90
Description	The version of the NVMe Base Specification supported.	
LongDescription	This property shall specify the type of NVMe Controller.	
Mandatory	Required when NVMe version is 1.2 or higher.	Mandatory
Notes		Implementations compliant to revision 1.2 or later of this specification shall report a non-zero value in this field. Map from corresponding value in register 3.1.2 to string as "1.0", "1.1", "1.2", "1.2.1", "1.3.0", "1.4.0", etc.

#### ${\bf 6.4.3.2.19\ NVMeController Properties. NVMeController Attributes. Reports UUIDList}$

The mapping for NVMeControllerProperties.NVMeControllerAttributes.ReportsUUIDList is summarized in Table 96.

**Table 96:** NVMeControllerProperties.NVMeControllerAttributes.ReportsUUIDList mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	N VMeControllerPro perties.NVMeCont rollerAttributes .ReportsUUIDList	NVM Spec Property / Field: Controller Attributes (CTRATT): UUID List (Bit 9) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 9 of Byte 99:96
Description	Indicates whether or not the controller supports reporting of a UUID list.	
LongDescription	This property shall indicate whether or not the controller supports reporting of a UUID list.	
Mandatory		
Notes		

#### ${\bf 6.4.3.2.20\ NVMeController Properties. NVMeController Attributes. Supports SQAssociations}$

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsSQAssociations is summarized in Table 97.

**Table 97:**NVMeControllerProperties.NVMeControllerAttributes. SupportsSQAssociations mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeCont rollerProperties .NVMeControllerA ttributes.Suppor tsSQAssociations	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 8 (SQ Associations) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 8 of Byte 99:96
Description	Indicates whether or not the controller supports SQ Associations.	
LongDescription	This property shall indicate whether or not the controller supports SQ Associations.	
Mandatory		
Notes		

#### 6.4.3.2.21 NVMeControllerProperties.NVMeControllerAttributes.ReportsNamespaceGranularity

The mapping for NVMeControllerProperties.NVMeControllerAttributes.ReportsNamespaceGranularity is summarized in Table 98.

#### Table 98:

 ${\tt NVMeControllerProperties.NVMeControllerAttributes.}\ Reports {\tt NamespaceGranularity}\ mapping$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControlle rProperties.NVMe ControllerAttrib utes.ReportsName spaceGranularity	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 7 (Namespace Granularity) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 7 of Byte 99:96
Description	Indicates whether or not the controller supports reporting of Namespace Granularity.	
LongDescription	This property shall indicate whether or not the controller supports reporting of Namespace Granularity.	
Mandatory	Recommended for NVM Drives.	
Notes		

#### ${\bf 6.4.3.2.22\ NVMeController Properties. NVMeController Attributes. Supports Traffic Based Keep A live}$

The mapping for NVMeControllerProperties.NVMeControllerAttributes.TrafficBasedKeepAlive is summarized in Table 99.

Table 99:

 ${\tt NVMeControllerProperties.NVMeControllerAttributes. Supports Traffic Based Keep A live mapping}$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerP roperties.NVMeCo ntrollerAttribut es.SupportsTraff icBasedKeepAlive	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 6 (Traffic Based Keep Alive Support – TBKAS) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 6 of Byte 99:96
Description	Indicates whether or not the controller supports restarting KeepAlive Timer if traffic is processed from an admin command or IO during KeepAlive Timeout interval.	

	R edfish/Swordfish NVMe	/ NVMe-oF
ongDescription	This property shall	
	indicate whether or	
	not the controller	
	supports restarting	
	KeepAlive Timer if	
	traffic is processed	
	from an admin	
	command or IO	
	during KeepAlive	
	Timeout interval.	
andatory	Required for	
	Ethernet-Attach	
	Drives.	
otes	For NVMe SSD	
	Drives: If	
	"Ethernet-Attach for	
	NVMe Drives"	
	feature is advertised,	
	this is required.	
	(This means	
	EnduranceGroups	
	and NVM Sets are	
	supported.)	

#### $6.4.3.2.23\ NV Me Controller Properties. NV Me Controller Attributes. Supports Predictable Latency Mode$

The mapping for NVMeControllerProperties.NVMeControllerAttributes.PredictableLatencyMode is summarized in Table 100.

**Table 100:** NVMeControllerProperties.NVMeControllerAttributes. SupportsPredictableLatencyMode mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerPr operties.NVMeCon trollerAttribute s.SupportsPredic tableLatencyMode	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 5 (Predictable Latency Mode) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 5 of Byte 99:96
Description	Indicates whether or not the controller supports Predictable Latency Mode.	
LongDescription	This property shall indicate whether or not the controller supports Predictable Latency Mode.	
Mandatory		
Notes		

#### 6.4.3.2.24 NVMeControllerProperties.NVMeControllerAttributes.SupportsEnduranceGroups

The mapping for NVMeControllerProperties.NVMeControllerAttributes.EnduranceGroups is summarized in Table 101.

**Table 101:** 

 ${\tt NVMeControllerProperties.NVMeControllerAttributes. Supports Endurance Groups mapping}$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeContr ollerProperties. NVMeControllerAt tributes.Support sEnduranceGroups	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 4 (Endurance Groups) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 4 of Byte 99:96
Description	Indicates whether or not the controller supports Endurance Groups.	
LongDescription	This property shall indicate whether or not the controller supports Endurance Groups.	
Mandatory	Required when Endu ranceGroups/Sets are supported.	

R edfish/Swordfish NVMe / NVMe	-oF
Notes For NVMe SSD	
Drives: If "Advanced	
Features for NVMe	
Drives" feature is	
advertised, this is	
required. (This	
means	
EnduranceGroups	
and NVM Sets are	
supported.)	

#### 6.4.3.2.25 NVMeControllerProperties.NVMeControllerAttributes.SupportsReadRecoveryLevels

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsReadRecoveryLevels is summarized in Table 102.

**Table 102:** 

 ${\tt NVMeControllerProperties.NVMeControllerAttributes.} \ Supports Read Recovery Levels \\ mapping$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControll erProperties.NVM eControllerAttri butes.SupportsRe adRecoveryLevels	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 3 (Read Recovery Levels) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 3 of Byte 99:96
Description	Indicates whether or not the controller supports Read Recovery Levels.	
LongDescription	This property shall indicate whether or not the controller supports Read Recovery Levels.	
Mandatory		
Notes		

#### ${\bf 6.4.3.2.26\ NVMeController Properties. NVMeController Attributes. Supports NVMS ets}$

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsNVMSets is summarized in Table 103.

**Table 103:** NVMeControllerProperties.NVMeControllerAttributes. SupportsNVMSets mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	N VMeControllerPro perties.NVMeCont rollerAttributes .SupportsNVMSets	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 2 (NVM Sets) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 2 of Byte 99:96
Description	Indicates whether or not the controller supports NVM Sets.	
LongDescription	This property shall indicate whether or not the controller supports NVM Sets.	
Mandatory	Required when Endu ranceGroups/Sets are supported.	

	R edfish/Swordfish NVMe / NVM	e-oF
	ix canony area and a twine y twin	
Notes	For NVMe SSD	
	Drives: If "Advanced	
	Features for NVMe	
	Drives" feature is	
	advertised, this is	
	required. (This	
	means	
	EnduranceGroups	
	and NVM Sets are	
	supported.)	

#### $\textbf{6.4.3.2.27} \quad \textbf{NVMeControllerProperties.NVMeControllerAttributes.} \\ \textbf{SupportsExceedingPowerOfNonOperation} \\ \textbf{Attributes.} \\ \textbf{SupportsExceedingPowerOfNonOperation} \\ \textbf{Attributes.} \\ \textbf$

The mapping for NVMeControllerProperties.NVMeControllerAttributes.SupportsExceedingPowerOfNonOp is summarized in Table 104.

**Table 104:** NVMeControllerProperties.NVMeControllerAttributes. SupportsExceeding-PowerOfNonOperationalState mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControlle rProperties.NVMe ControllerAttrib utes.SupportsExc eedingPowerOfNon OperationalState	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 1 (Non-Operational Power State Permissive Mode) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 1 of Byte 99:96
Description	Indicates whether or not the controller supports exceeding Power of NonOperational State in order to execute controller initiated background operations in a non-operational power state.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	indicate whether or	
	not the controller	
	supports exceeding	
	Power of	
	NonOperational	
	State in order to	
	execute controller	
	initiated	
	background	
	operations in a	
	non-operational	
	power state.	
Mandatory		
Notes		

### 6.4.3.2.28 NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId

The mapping for NVMeControllerProperties.NVMeControllerAttributes.Supports128BitHostId is summarized in Table 105.

**Table 105:** 

 ${\tt NVMeControllerProperties.NVMeControllerAttributes. Supports 128Bit Host Id mapping}$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeCo ntrollerProperti es.NVMeControlle rAttributes.Supp orts128BitHostId	NVM Spec Property / Field: Controller Attributes (CTRATT): Bit 0 NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.2 (IdentifyController), Figure 249
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 0 of Byte 99:96
Description	Indicates whether or not the controller supports a 128-bit Host Identifier.	
LongDescription	This property shall indicate whether or not the controller supports a 128-bit Host Identifier.	
Mandatory	Required	
Notes		

**6.4.3.2.29 NVMeControllerProperties.MaxQueueSize** The mapping for NVMeControllerProperties.MaxQueueSize is summarized in Table 106.

**Table 106:** NVMeControllerProperties.ANACharacteristics mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeC ontrollerPropert ies.MaxQueueSize	NVM Spec Property / Field: Maximum Queues Entries Supported (MQES) NVM Spec: Section:Figure NVMe 1.4a; Section 3.1.1 Controller Capabilities; Figure 69
Туре	Int64	NVM Spec Property Type: Additional NVM Spec Identifying Information: ByteOffset: Bits 15:00
Description	Indicates the maximum individual queue size that an NVMe IO Controller supports.	

	R edfish/Swordfish NVMe /	NVMe-oF
LongDescription	This property shall	
	contain the	
	maximum individual	
	queue entry size	
	supported per	
	queue. This is a	
	zero-based value,	
	where the minimum	
	value is one,	
	indicating two	
	entries. For PCIe,	
	this applies to both	
	submission and	
	completion queues.	
	For NVMe-oF, this	
	applies to only	
	submission queues.	
Mandatory		
Notes		

**6.4.3.2.30 NVMeControllerProperties.MaxQueueSize** The mapping for NVMeControllerProperties.ANACharacteristics is summarized in Table 107.

**Table 107:** NNVMeControllerProperties.ANACharacteristics mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControl lerProperties.AN ACharacteristics	
Туре	Collecti on(StorageContro ller.v1_0_0.ANA Characteristics)	
Description	This property contains the combination of ANA type and volume information.	
LongDescription	This property shall contain the combination of ANA type and volume information.	
Mandatory		
lotes		

**6.4.3.2.31 NVMeControllerProperties.ANACharacteristics.AccessState** The mapping for NVMeControllerProperties.ANACharacteristics.AccessState is summarized in Table 108.

**Table 108:** NNVMeControllerProperties.ANACharacteristics.AccessState mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeCon trollerPropertie s.ANACharacteris tics.AccessState	NVM Spec Property / Field: Asymmetric Namespace Access State NVM Spec: Section:Figure NVMe 1.4a; Section 5.14.1.12; Figure 211
Type	StorageC ontroller.v1_0_ 0.ANAAccessState	NVM Spec Property Type: Additional NVM Spec Identifying Information: ByteOffset: Bits 03:00 of Byte 16
Description	Reported ANA Access state.	
LongDescription	This property shall contain the reported ANA Access State.	
Mandatory		
Notes	Available values: Optimized / NonOptimized / Inacessible / PersistentLoss	

**6.4.3.2.32 NVMeControllerProperties.ANACharacteristics.Volume** The mapping for NVMeControllerProperties.ANACharacteristics.Volume is summarized in Table 109.

Table 109: NNVMeControllerProperties.ANACharacteristics.Volume mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NV MeControllerProp erties.ANACharac teristics.Volume	NVM Spec Property / Field: Namespace Identifier X: NVM Spec: Section:Figure NVMe 1.4a; Section 5.14.1.12; Figure 211
Type	Volume.Volume	NVM Spec Property Type: Additional NVM Spec Identifying Information: Bits 35:32, 39:36,, ((n*4) + 35):
((n*4) + 32) - up to "n" namespace identifiers.		
Description	The specified volume.	
LongDescription	This property shall contain a link to the specified volume.	
Mandatory		

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	This field contains the pointer to the namespace for which the access state applies.	The namespace id should be redirected / linked to the corresponding namespace (volume) object with that namespace id. If this set of fields contains multiple namespaces (e.g., a group of namespaces), a unique entry in the ANACharacteristics array should be created for each namespace.

# 6.4.3.2.33 NVMeControllerProperties.NVMeSMARTCriticalWarnings.PRMUnreliable

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.PMRUnreliable is summarized in Table 110.

**Table 110:** NVMeControllerProperties.NVMeSMARTCriticalWarnings.PMRUnreliable mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControllerPr operties.NVMeSMA RTCriticalWarnin gs.PMRUnreliable	NVM Spec Property / Field: Critical Warning NVM Spec: Section:Figure NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 5 of Byte 00
Description	The Persistent Memory Region has become unreliable.	

	R edfish/Swordfish NVMe	/ NVMe-of
LongDescription	This property shall	
	indicate that the	
	Persistent Memory	
	Region has become	
	unreliable. PCI	
	Express memory	
	reads may return	
	invalid data or	
	generate poisoned	
	PCI Express TLP(s).	
	Persistent Memory	
	Region memory	
	writes may not	
	update memory or	
	may update memory	
	with undefined data.	
	The Persistent	
	Memory Region may	
	also have become	
	non-persistent.	
Mandatory	Recommended for	
	NVM Drives	
Notes		

# 6.4.3.2.34 NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.PowerBackupFailed is summarized in Table 111.

**Table 111:**NVMeControllerProperties.NVMeSMARTCriticalWarnings. PowerBackupFailed mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMe ControllerProper ties.NVMeSMARTCr iticalWarnings.P owerBackupFailed	NVM Spec Property / Field: Critical Warning NVM Spec: Section:Figure NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 4 of Byte 00
Description	Indicates that the volatile memory backup device has failed.	
LongDescription	This property shall indicate that the volatile memory backup device has failed.	
Mandatory	Recommended for NVM Drives	
Notes		

# 6.4.3.2.35 NVMeControllerProperties.NVMeSMARTCriticalWarnings.MediaInReadOnly

The mapping for NVMeControllerProperties.NVMeSMARTCriticalWarnings.MediaInReadOnly is summarized in Table 112.

**Table 112:**NVMeControllerProperties.NVMeSMARTCriticalWarnings.MediaInReadOnly mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NV MeControllerProp erties.NVMeSMART CriticalWarnings .MediaInReadOnly	NVM Spec Property / Field: Critical Warning NVM Spec: Section:Figure NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 3 of Byte 00
Description	Indicates the media has been placed in read only mode.	
LongDescription	This property shall indicate the media has been placed in read only mode. This is not set when the read-only condition on the media is a result of a change in the write protection state of a namespace.	
Mandatory	Required	
Notes		

# 6.4.3.2.36 NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSystemDegraded

 $The \textit{mapping} for \textit{NVMeControllerProperties.NVMeSMARTCriticalWarnings.OverallSubsystemDegraded is summarized in Table 113.$ 

**Table 113:**NVMeControllerProperties.NVMeSMARTCriticalWarnings. OverallSubsystemDegraded mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeControl lerProperties.NV MeSMARTCriticalW arnings.OverallS ubsystemDegraded	NVM Spec Property / Field: Critical Warning NVM Spec: Section:Figure NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 2 of Byte 00
Description	Indicates that the NVM subsystem reliability has been compromised.	
LongDescription	This property shall indicate that the NVM subsystem reliability has been compromised.	
Mandatory	Required	
Notes		

mapping

# 6.4.3.2.37 NVMeControllerProperties.NVMeSMARTCriticalWarnings.SpareCapacityWornOut

 $The \, mapping \, for \, {\tt NVMeControllerProperties.NVMeSMARTCritical Warnings.} Spare {\tt CapacityWornOutility Summarized} \, in \, {\tt Table} \, 114.$ 

**Table 114:** NVMeControllerProperties.NVMeSMARTCriticalWarnings. SpareCapacityWornOut

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeCon trollerPropertie s.NVMeSMARTCriti calWarnings.Spar eCapacityWornOut	NVM Spec Property / Field: Critical Warning NVM Spec: Section:Figure NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 0 of Byte 00
Description	Indicates that the available spare capacity has fallen below the threshold.	
LongDescription	This property shall indicate that the available spare capacity has fallen below the threshold.	
Mandatory	Required (for NVM Drives)	
Notes		

# **6.4.3.2.38 PCIeInterface.PCIeType** The mapping for PCIeInterface.PCIeType is summarized in Table 115.

Table 115: PCIeInterface.PCIeType mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	PCleIn terface.PCleType	
ype	enum (PCIe Device.PCIeType)	
escription	The version of the PCIe specification in use by this device.	
ongDescription	This property shall contain the negotiated PCIe interface version in use by this device.	N/A
ndatory	Required for PCIe attach NVMe Drives; do not implement for ethernet-attach drives.	
otes	Possible values: Gen1/Gen 2/Gen3/Gen4/Gen5	

**6.4.3.2.39 PCIeInterface.MaxPCIeType** The mapping for PCIeInterface.MaxPCIeType is summarized in Table 116.

Table 116: PCIeInterface.MaxPCIeType mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	PCleInter face.MaxPCleType	
Туре	enum (PCle Device.PCleType)	
Description	The highest version of the PCIe specification supported by this device.	N/A
LongDescription	This property shall contain the maximum PCIe specification that this device supports.	N/A
Mandatory	Required for PCIe attach NVMe Drives; do not implement for ethernet-attach drives.	
Notes	Possible values: Gen1/Gen 2/Gen3/Gen4/Gen5	

**6.4.3.2.40 PCIeInterface.LanesInUse** The mapping for PCIeInterface.LanesInUse is summarized in Table 117.

Table 117: PCIeInterface.LanesInUse mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	PCIeInte rface.LanesInUse	
Туре	int64	
Description	The number of PCIe lanes in use by this device.	
LongDescription	This property shall contain the number of PCIe lanes in use by this device, which shall be equal to or less than the MaxLanes property value.	
Mandatory	Required for PCIe attach NVMe Drives; do not implement for ethernet-attach drives.	
Notes		

**6.4.3.2.41 PCleInterface.MaxLanes** The mapping for PCIeInterface.LanesInUse is summarized in Table 118.

Table 118: PCIeInterface.LanesInUse mapping

	R edfish/Swordfish NVMe	/ NVMe-of
Property	PCleInte rface.LanesInUse	
Туре	int64	
Description	The number of PCIe lanes supported by this device.	
LongDescription	This property shall contain the maximum number of PCIe lanes supported by this device.	
Mandatory	Required for PCIe attach NVMe Drives; do not implement for ethernet-attach drives.	
Notes		

# **6.4.3.2.42 Ports** The mapping for Ports is summarized in Table 119.

Table 119: Ports mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Ports	NVM Spec Property A Field: N/A NVM Spec Section:Figure N/A
Туре	PortCollectio n.PortCollection	N/A
Description	The link to the collection of ports that exist on the storage controller.	N/A
LongDescription	This property shall contain a link to a resource collection of type PortCollection.	N/A
Mandatory	Do Not Implement	
Notes		

# **6.4.3.2.43 SKU** The mapping for SKU is summarized in Table 120.

Table 120: SKU mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	SKU	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	Edm.String	N/A
Description	The SKU for this storage controller.	N/A
LongDescription	This property shall contain the stock-keeping unit number for this storage storage controller.	N/A
Mandatory	Do Not Implement	
Notes		

# **6.4.3.2.44 SpeedGbps** The mapping for SpeedGbps is summarized in Table 121.

Table 121: SpeedGbps mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	SpeedGbps	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	Decimal	N/A
Description	The maximum speed of the storage controller's device interface.	N/A
LongDescription	This property shall represent the maximum supported speed of the storage bus interface, in Gbit/s. The specified interface connects the controller to the storage devices, not the controller to a host. For example, SAS bus not PCIe host bus.	N/A
Mandatory	Do Not Implement	
Notes		

**6.4.3.2.45 Status.State** The mapping for Status.State is summarized in Table 122.

Table 122: Status. State mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.State	NVM Spec Property / Field: CSTS – Controller Status NVM Spec: Section:Figure NVMe 1.4a: Section 3.1.6, Figure 79
Туре	Resource.State (enum)	NVM Spec Property Type:
Description	The known state of the resource, such as, enabled.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	indicate whether	
	and why this	
	component is	
	available. Enabled	
	indicates the	
	resource is available.	
	Disabled indicates	
	the resource has	
	been intentionally	
	made unavailable	
	but it can be	
	enabled. Offline	
	indicates the	
	resource is	
	unavailable	
	intentionally and	
	requires action to	
	make it available.	
	InTest indicates that	
	the component is	
	undergoing testing.	
	Starting indicates	
	that the resource is	
	becoming available.	
	Absent indicates the	
	resource is	
	physically	
	unavailable.	
Mandatory		Mandatory

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values:	Ready (CSTS.RDY) maps to
	Enabled / Disabled /	Enabled, Shutdown
	StandbyOffline /	(CSTS.SHST) value will tell
	StandbySpare /	you if shutdown is in
	InTest / Starting /	progress or complete
	ABsent / Una	(StandbyOffline),
	vaialableOffline /	ProcessingPaused
	Deferring / Quiesced	(CSTS.PP) maps to
	/ Updating /	Deferring. If both Ready and
	Qualified	Shutdown are indicated,
		then the system should
		indicate StandbyOffline. If
		both Ready and
		ProcessingPaused are
		indicated, then the system
		should indicate Deferring.

**6.4.3.2.46 Status.Health** The mapping for Status.Health is summarized in Table 123.

Table 123: Status. Health mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.Health	NVM Spec Property / Field: CSTS – Controller Status NVM Spec: Section:Figure NVMe 1.4a: Section 3.1.6, Figure 79 NVM Spec Property / Field: Critical Warning NVM Spec: Section:Figure NVMe 1.4a: Section 5.14.1.2, SMART / Health Information, Figure 196
Туре	Resource.Health	NVM Spec Property Type:
Description	The health state of this resource in the absence of its dependent resources.	
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
Mandatory		

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible Values: OK /	This comes from CSTS
	Warning / Critical	Controller Failure Status,
		and from the SMART /
		health information log
		critical warning field.

**6.4.3.2.47 SupportedControllerProtocols** The mapping for SupportedControllerProtocols is summarized in Table 124.

Table 124: SupportedControllerProtocols mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	SupportedCon trollerProtocols	N/A
Туре	Collection(Pr otocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The supported set of protocols for communicating to this storage controller.	
LongDescription	This property shall contain the supported set of protocols for communicating to this storage controller.	
Mandatory		
Notes	This is an array of protocols supported by the St orageController. This can be set to values including, but not limited to, PCIe, RDMA, NVMe-oF, RoCE, RoCEv2, and InfiniBand.	

**6.4.3.2.48 SupportedDeviceProtocols** The mapping for SupportedDeviceProtocols is summarized in Table 125.

 Table 125:
 Supported Device Protocols mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Supporte dDeviceProtocols	N/A
Туре	Collection(Pr otocol.Protocol)	<b>NVM Spec Property Type:</b> N/A
Description	The protocols that the storage controller can use to communicate with attached devices.	
LongDescription	This property shall contain the set of protocols this storage controller can use to communicate with attached devices.	
Mandatory		
Notes	Do not implement.	

#### 6.5 Namespace

The Redfish/Swordfish Volume schema is used to represent an NVM Namespace.

#### 6.5.1 Mockup

The following mockup shows a sample representation of the Volume schema used to represent an NVM Namespace.

```
"@Redfish.Copyright": "Copyright 2014-2020 SNIA. All rights reserved.",
"@odata.id":
→ "/redfish/v1/Storage/NVMe-oF-Subsystem/Volumes/LogicalNamespace1",
"@odata.type": "#Volume.v1_5_0.Volume",
"Id": "1",
"Name": "Namespace 1",
"LogicalUnitNumber": 1,
"Status": {
  "State": "Enabled",
  "Health": "OK"
},
"Identifiers": [{
  "DurableNameFormat": "NGUID",
  "DurableName": "FEDCBA9876543210h"
"Capacity": {
  "Data": {
   "ConsumedBytes": 0,
   "AllocatedBytes": 10737418240
 },
  "Metadata": {
   "AllocatedBytes": 536870912
  }
"CapacitySources": [{
  "@odata.id": "/redfish/v1/Storage/NVMe-oF-
  → Subsystem/Volumes/LogicalNamespace1/CapacitySources/Source1"
}],
"NVMeNamespaceProperties": {
  "NamespaceId": "0x014",
  "NamespaceFeatures": {
    "SupportsThinProvisioning": false,
```

```
"SupportsAtomicTransactionSize": false,
    "SupportsDeallocatedOrUnwrittenLBError": false,
    "SupportsNGUIDReuse": false,
    "SupportsIOPerformanceHints": false
},
    "NumberLBAFormats": 0,
    "FormattedLBASize": "LBAFormat0Support",
    "MetadataTransferredAtEndOfDataLBA": false,

"NVMeVersion": "1.4"
}
```

### **6.5.2 Property Mapping**

**6.5.2.1 BlockSizeBytes** The mapping for BlockSizeBytes is summarized in Table 126.

Table 126: BlockSizeBytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	BlockSizeBytes	NVM Spec Property / Field: Formatted LBA Size (FLBAS) NVM Spec: Section:Figure 247: byte 26
Туре	Int64	
Description	The size, in bytes, of the smallest addressable unit, or block.	
LongDescription	This property shall contain size of the smallest addressable unit of the associated drive.	
Mandatory	Required	
Notes		Follow index in 247: Byte 26 (bits 3:0) to the LBA format structure to get the metadata size and LBA data size combination. These combined values are BlockSizeBytes.

**6.5.2.2 Capacity.Data.ConsumedBytes** The mapping for Capacity.Data.ConsumedBytes is summarized in Table 127.

 Table 127: Capacity.Data.ConsumedBytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Capacity.Da ta.ConsumedBytes	NVM Spec Property / Field: Namespace Utilization (NUSE) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Int64	NVM Spec Property Type: int 64 Additional NVM Spec Identifying Information: ByteOffset: 23:16, Identify Namespace data structure
Description	The number of bytes consumed in this data store for this data type.	The current number of logical blocks allocated in the namespace.
LongDescription	The value shall be the number of logical bytes currently consumed in this data store for this data type.	This field indicates the current number of logical blocks allocated in the namespace. This field is smaller than or equal to the Namespace Capacity. The number of logical blocks is based on the formatted LBA size.
Mandatory	Yes	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Reporting capacity in bytes is the Redfish and Swordfish standard mechanism. Clients expect the capacity information to be reported consistently for these devices, so the calculation here is to convert the NVMe properties (in	Returned in bytes 23:16 of the Identify Namespace Data Structure (NVM Command Set Specific). Reference NVMe Base Specification section n 5.15.2.1 and figure 247).
	blocks) to bytes.	

**6.5.2.3 Capacity.Data.ProvisionedBytes** The mapping for Capacity.Data.ProvisionedBytes is summarized in Table 128.

 Table 128: Capacity. Data. Provisioned Bytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Capacity.Data.	NVM Spec Property /
	ProvisionedBytes	<b>Field:</b> NVM Capacity (NCAP) <b>NVM Spec: Section:Figure</b> NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Туре	Int64	NVM Spec Property Type: int 64 Additional NVM Spec Identifying Information: ByteOffset: 15:08, Identify Namespace data structure

	R edfish/Swordfish	NVMe / NVMe-oF
Description	The maximum number of bytes that can be allocated in this data store for this data type.	The total size of the namespace in logical blocks (LBA 0 through n-1).
LongDescription	The value shall be the maximum number of bytes that can be allocated in this data store for this data type.	This field indicates the total size of the namespace in logical bytes. The value is in bytes. A namespace of size in consists of LBA 0 through (n - 1). The number of logical blocks is based on the formatted LBA size. This field is undefined prior to the namespace being formatted.
Mandatory	No	No
Notes	This property is required when issuing a create namespace command. It is also required for "change namespace" when modifying the size of the namespace.	Returned in bytes 07:00 of the Identify Namespace Data Structure (NVM Command Set Specific). Reference NVMe Base Specification section in 5.15.2.1 and figure 247.

**6.5.2.4 Capacity.Data.AllocatedBytes** The mapping for Capacity.Data.AllocatedBytes is summarized in Table 129.

Table 129: Capacity. Data. Allocated Bytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Capacity.Dat a.AllocatedBytes	NVM Spec Property / Field: Namespace Size (NSZE) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Int64	NVM Spec Property Type: int 64 Additional NVM Spec Identifying Information: ByteOffset: 07:00, Identify Namespace data structure
Description	The number of bytes currently allocated by the storage system in this data store for this data type.	The total size of the NVM allocated to this namespace.

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.	The total size of the NVM allocated to this namespace. The value is in bytes. This field shall be supported if the Namespace Management capability (refer to NVMe Base Specification section 8.12) is supported. This field may not correspond to the logical block size multiplied by the Namespace Size field. Due to thin provisioning or other settings (e.g., endurance), this field may be larger or smaller than the Namespace Size reported.
Mandatory	No	No
Notes	Reporting capacity in bytes is the Redfish and Swordfish standard mechanism.	Returned in bytes 63:48 of the Identify Namespace Data Structure (NVM Command Set Specific). Reference NVMe Base Specification section in 5.15.2.1 and figure 247.

**6.5.2.5 Capacity.Metadata** The mapping for Capacity.Metadata is summarized in Table 130.

Table 130: Capacity. Metadata. Allocated Bytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Capa city.Metadata.*	N/A

	R edfish/Swordfish	NVMe / NVMe-oF
Туре	Int64	N/A
Description	The number of bytes currently allocated by the storage system in this data store for this data type.	N/A
LongDescription	The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.	N/A
Mandatory	No; not required for NVMe Drives.	No
Notes		Do not return metadata information for NVMe devices. This is included in the overall reported capacity information.

**6.5.2.6 CapacitySources** The mapping for CapacitySources is summarized in Table 131.

Table 131: CapacitySources mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	CapacitySources	NVM Spec Property / Field: NVM Set Identifier (NVMSETID) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Туре	Col lection(Capacity .CapacitySource)	NVM Spec Property Type: int 64 Additional NVM Spec Identifying Information: ByteOffset: 101:100, Identify Namespace data structure
Description	An array of space allocations to this volume.	The NVM Set in which the namespace is allocated
LongDescription	Fully or partially consumed storage from a source resource. Each entry provides capacity allocation information from a named source resource.	
Mandatory	No	No

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Contains the information about the entity providing capacity (e.g,	For NVMe devices that do not implement Endurance Groups and NVM Sets, it is recommended that the
	EnduranceGroup) for this namespace. This property is a collection pointer; each	CapacitySource not be implemented. For Implementations that do instantiate Endurance Groups and NVM Sets, the
	CapacitySource instance contains a CapacitySource object. The CapacitySource contains the overall capacity (in bytes),	capacity source should be implemented as a pointer to the corresponding Endurance Group. (See mockups for examples.)
	the types and pointers to the underlying capacity sources.	

# **6.5.2.7 Description** The mapping for Description is summarized in Table 132.

Table 132: Description mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Туре	String	N/A
Description	The description of this resource.	N/A

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specifi cation-described requirements.	N/A
Mandatory	Yes	N/A
Notes	In Redfish, Description is a read-only field.	Return the common description: "A Namespace is a quantity of non-volatile memory that may be formatted into logical blocks. When formatted, a namespace of size n is a collection of logical blocks with logical block addresses from 0 to (n-1). NVMe systems can support multiple namespaces."

### **6.5.2.8 DisplayName** The mapping for DisplayName is summarized in Table 133.

Table 133: DisplayName mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	DisplayName	N/A
Туре	String	N/A
Description	A u ser-configurable string to name the volume.	N/A

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	his property shall contain a u ser-configurable string to name the volume.	N/A
Mandatory	Recommended. (Recommended for NVMe Drives)	N/A
Notes	This contains an (end) user settable "friendly" name for the namespace. This may map to a property that shows up in the proprietary software, as long as it is configurable by the end-user, and is intended to contain a displayable string.	

### **6.5.2.9 Identifiers** The mapping for Identifiers is summarized in Table 134.

Table 134: Identifiers mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	Namespace Identification Descriptor list
Туре	Collection(Reso urce.Identifier)	A variable length  Namespace Identification  Descriptor structures

	R edfish/Swordfish	NVMe / NVMe-oF
Description	The Durable names for the storage controller.	A list of Namespace Identification Descriptor structures containing Namespace Type, Namespace Identifier Length (NIDL), and Namespace ID (NID).
LongDescription	This property shall contain a list of all known durable names for the associated storage controller.	A list of any number of variable length Namespace Identification Descriptor structures that fit into the 4,096 byte Identify payload All remaining bytes after the namespace identification descriptor structures should be cleared to 0h, and the host shall interpre a Namespace Identifier Descriptor Length (NIDL) value of 0h as the end of the list. The host should ignore any Namespace Identification Descriptor with a Namespace Identifier Type not supported by the host.
Mandatory	No	No
Notes	This is an array of unique identifiers for the NVM Subsystem including Namespace Type and Namespace ID.	Refer to NVMe Base Specification Figure 246 CNS 03h and Figure 251 (Identify – Namespace Identification Descriptor).

**6.5.2.10 Identifiers.DurableName** The mapping for Identifiers.DurableName is summarized in Table 135.

Table 135: Identifiers. Durable Name mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identif iers.DurableName	Namespace Identifier (NID)
Туре	Variable - see notes	Variable - see notes
Description	The Durable names for the storage controller.	Durable Namespace Identifier
LongDescription	This property shall contain a list of all known durable names for the Namespace.	A list of globally unique values assigned to the Namespace when the Namespace is created. Values remain fixed throughout the life of the Namespace and are preserved across Namespace and Controller operations (e.g., Controller Level Reset, Namespace format, etc.).
Mandatory	No	No

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	This is an array of unique identifiers for the Namespace. Type and length of descriptor are in the corresponding Identifiers.D urableNameFormat property.	This is an array of unique identifiers for the NVM Namespace. Type and length of the descriptor are in the corresponding Namespace Identifier Type (NIDT). Refer to NVMe Base Specification Figure 246 CNS 03h and Figure 251 - Figure 251 Byte NID of Identify – Namespace Identification Descriptor.

**6.5.2.11 Identifiers.DurableNameFormat** The mapping for Identifiers.DurableNameFormat is summarized in Table 136.

Table 136: Identifiers.DurableNameFormat mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers.D urableNameFormat	Namespace Identifier Type (NIDT)
Type	Int64	Int64
Description	The Durable names for the storage controller.	The Namespace Identifier data type and length.

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain a list of the types for all known durable names for the associated storage controller. The type determines the length of the corresponding Namespace ID	the data type contained in the Namespace Identifier field and the length of that type as defined in the NVMe Base Specification Figure 251 - Identify (Namespace Identification Descriptor) byte 00. Allowed values are 1 = an 8-byte IEEE Extended Unique Identifier . 2 = a 10-byte Namespace Globally Unique Identifier. 3 = an 8-byte Namespace UUID
Mandatory	No	No
Notes	This is an array of types for the unique identifiers for the NVM Subsystem. Values may be 'EUI64', 'NGUID', or 'UUID'.	Refer to NVMe Base Specification Figure 246 CNS 03h and Figure 251 - Figure 251 (NIDT) of Identify - Namespace Identification Descriptor.

**6.5.2.12 InitializeMethod** The mapping for InitializeMethod is summarized in Table 137.

Table 137: InitializeMethod mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	InitializeMethod	N/A
Type	Volume. InitializeMethod (enum)	

	R edfish/Swordfish	NVMe / NVMe-oF
Description	Indicates the Initialization Method used for this volume. If InitializeMethod is not specified, the InitializeMethod should be Foreground.	
LongDescription	This property shall indicate the initialization method used for this volume. If InitializeMethod is not specified, the InitializeMethod should be Foreground. This value reflects the most recently used Initialization Method, and may be changed using the Initialize Action.	
Mandatory	Recommended for NVMe Drives.	
Notes	Available values: Fast / Slow	Not in NVMe Specification today.

**6.5.2.13 Links.Drives** The mapping for Links.Drives is summarized in Table 138.

Table 138: Links. Drives mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Links.Drives	
Туре	Collect ion(Drive.Drive)	
Description	An array of the drives to be used by the volume	
LongDescription	This parameter shall contain an array of the drives to be used by the volume.	
Mandatory	Required for NVMe Drives.	
Notes	This array shall contain links to the drive object for this namespace.	

**6.5.2.14 LogicalUnitNumber** The mapping for LogicalUnitNumber is summarized in Table 139.

**Table 139:** LogicalUnitNumber mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	L ogicalUnitNumber	N/A
Туре	Int64	N/A
Description	Indicates the host-visible L ogicalUnitNumber assigned to this Volume.	N/A

	Dodfieb/Cwerdfieb	
	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	N/A
	contain host-visible	
	L ogicalUnitNumber	
	assigned to this	
	Volume. This	
	property shall only	
	be used when in a	
	single connect	
	configuration and	
	no StorageGroup	
	configuration is	
	used.	
Mandatory	No	N/A
Notes	Do not use with	Do not implement.
	NVMe devices. This	·
	is represented more	
	correctly with	
	(NVMeN	
	amespaceProperti	

**6.5.2.15 MaxBlockSizeBytes** The mapping for MaxBlockSizeBytes is summarized in Table 140.

Table 140: MaxBlockSizeBytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	M axBlockSizeBytes	NVM Spec Property / Field: Formatted LBA Size (FLBAS) NVM Spec: Section:Figure 247: byte 26
Туре	Int64	

	R edfish/Swordfish	NVMe / NVMe-oF
Description	The size, in bytes, of the smallest addressable unit, or block.	
LongDescription	This property shall contain size of the smallest addressable unit of the associated drive.	
Mandatory	Recommended to not implement; however, if implemented this should have the same value as BlockSizeBytes.	
Notes		Follow index in 247: Byte 26 (bits 3:0) to the LBA format structure to get the metadata size and LBA data size combination. These combined values are BlockSizeBytes.

## **6.5.2.16 Name** The mapping for Name is summarized in Table 141.

Table 141: Name mapping

R edfish/Swordfish	NVMe / NVMe-oF
Name	NVM Spec Property /
	Field: Namespace ID (NSID)
	<b>NVM Spec: Section:Figure</b>
	NVMe 1.4a
	·

	R edfish/Swordfish	NVMe / NVMe-oF
Туре	String	
Description	The name of the resource or array member.	N/A
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	To determine the active NSIDs for a particular controller, the host may follow either of the following methods: 1. Issue an Identify command with the CNS field cleared to 0h for each valid NSID (based on the Number of Namespaces value (i.e., MNAM field or NN field) in the Identify Controller data structure). If a non-zero data structure is returned for a particular NSID, then that is an active NSID; or 2. Issue an Identify command with a CNS field set to 2h to retrieve a list of up to 1,024 active NSIDs. If there are more than 1,024 active NSIDs, continue to issue Identify commands with a CNS field set to 2h until all active NSIDs are retrieved.
Mandatory	Yes	N/A
Notes	In Redfish, Name is a read-only field.	Map the NSID field to a string with the format: "0xABCD"

**6.5.2.17 NVMeNamespaceProperties.NamespaceId** The mapping for NVMeNamespaceProperties.NamespaceId is summarized in Table 142.

Table 142: NVMeNamespaceProperties.NamespaceId mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVM eNamespaceProper ties.NamespaceId	Namespace Identifier (NSID)
Туре	String	8-byte value
Description	The NVMe Namespace Identifier for this namespace.	An identifier used by a controller to provide access to a namespace.
LongDescription	This property shall contain the NVMe Namespace Identifier for this namespace. This property shall be a hex value. Namespace identifiers are not durable and do not have meaning outside the scope of the NVMe subsystem. NSID 0x0, 0xFFFFFFFF, 0xFFFFFFFE are special purpose values.	An identifier used by a controller to provide access to a namespace or the name of the field in the SQI that contains the namespace identifier.
Mandatory	Yes	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes		To determine the active
		NSIDs for a particular
		controller, the host may
		follow either of the
		following methods: 1. Issue
		an Identify command with
		the CNS field cleared to 0h
		for each valid NSID (based
		on the Number of
		Namespaces value (i.e.,
		MNAM field or NN field) in
		the Identify Controller data
		structure). If a non-zero
		data structure is returned
		for a particular NSID, then
		that is an active NSID; or 2.
		Issue an Identify command
		with a CNS field set to 2h to
		retrieve a list of up to 1,024
		active NSIDs. If there are
		more than 1,024 active
		NSIDs, continue to issue
		Identify commands with a
		CNS field set to 2h until all
		active NSIDs are retrieved.

**6.5.2.18 NVMeNamespaceProperties.IsShareable** The mapping for NVMeNamespaceProperties.IsShareable is summarized in Table 143.

 Table 143:
 NVMeNamespaceProperties.IsShareable mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVM eNamespaceProper ties.IsShareable	NVM Spec Property / Field: Namespace Multi-path I/O and Namespace Sharing Capabilities (NMIC) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 0 of Byte 30
Description	Indicates the namespace is shareable.	Specifies multi-path I/O and namespace sharing capabilities of the namespace.
LongDescription	This property shall indicate whether the namespace is shareable.	If set to '1', then the namespace may be attached to two or more controllers in the NVM subsystem concurrently (i.e., may be a shared namespace). Bits 7:1 are reserved. Bit 0, if cleared to '0', indicates the namespace is a private namespace and is able to be attached to only one controller at a time.
Mandatory	No	No

	R edfish/Swordfish	NVMe / NVMe-oF
Notes		Returned in byte 30 of the
		Namespace Features
		(NSFEAT) of the of the
		Identify Namespace Data
		Structure (Reference NVMe
		Base Specification section
		5.15.2.1 and figure 247).

### ${\bf 6.5.2.19\ NVMeName space Properties.} Name space Features. Supports Thin Provisioning$

The mapping for NVMeNamespaceProperties.NamespaceFeatures.SupportsThinProvisioning is summarized in Table 144.

**Table 144:**NVMeNamespaceProperties.NamespaceFeatures. SupportsThinProvisioning mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NV MeNamespace- Prope rties.NamespaceF eatures.Supports ThinProvisioning	NVM Spec Property / Field: THINP NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 0 of Byte 24
Description	This property indicates whether or not the NVMe Namespace supports thin provisioning.	Indicates that the namespace supports thin provisioning

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall indicate whether or not the NVMe Namespace supports thin provisioning. Specifically, the namespace capacity reported may be less than the namespace size.	if set to '1' indicates that the namespace supports thin provisioning. If cleared to '0' indicates that thin provisioning is not supported. Refer to NVMe Base Specification section 6.1.7 for details on the usage of this field.
Mandatory	Yes	Yes
Notes		Returned in byte 24, bit 0 of the Namespace Features (NSFEAT) of the of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247).

#### ${\bf 6.5.2.20\ NVMeNames pace Properties. Names pace Features. Supports Deallocated Or Unwritten LBError}$

The mapping for NVMeNamespaceProperties.NamespaceFeatures.SupportsDeallocatedOrUnwrittenLBError is summarized in Table 145.

**Table 145:** NVMeNamespaceProperties.NamespaceFeatures. SupportsDeallocatedOrUnwrittenLBError mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeNamespacePr	NVM Spec Property /
	operties.Namespa	Field: DAE NVM Spec:
	ceFeatures.Suppo	Section:Figure NVMe 1.4a:
	rtsDeallocatedOr	Section 5.15.2.1 (Identify
	UnwrittenLBError	Namespace), Figure 247

	R edfish/Swordfish	NVMe / NVMe-oF
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 2 of Byte 24
Description	This property indicates that the controller supports deallocated or unwritten logical block error for this namespace.	Indicates that the controller supports the Deallocated or Unwritten Logical Block error for this namespace.
LongDescription	This property shall indicate that the controller supports deallocated or unwritten logical block error for this namespace.	If set to '1' indicates that the controller supports the Deallocated or Unwritten Logical Block error for this namespace. If cleared to '0', then the controller does not support the Deallocated or Unwritten Logical Block error for this namespace. Refer to NVMe Base Specification section 6.7.1.1
Mandatory	Yes	Yes
Notes		Returned in byte 24, bit 2 of the Namespace Features (NSFEAT) of the of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247.

### 6.5.2.21 NVMeNamespaceProperties.NamespaceFeatures.SupportsNGUIDReuse

 $The \, mapping \, for \, {\tt NVMeNamespaceProperties.NamespaceFeatures.Supports NGUID Reuse}$ 

is summarized in Table 146.

**Table 146:** NVMeNamespaceProperties.NamespaceFeatures.SupportsNGUIDReuse mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeNamespac eProperties.Name spaceFeatures.Su pportsNGUIDReuse	NVM Spec Property / Field: UIDREUSE NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Туре	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 3 of Byte 24
Description	This property indicates that the namespace supports the use of an NGUID (namespace globally unique identifier) value.	Indicates if the value in the NGUID field and the value in the EUI64 field for this namespace may be reused by the controller for a new namespace created after this namespace is deleted.

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall indicate that the namespace supports the use of an NGUID (namespace globally unique identifier) value.	If set to '1' indicates that the value in the NGUID field for this namespace, if non-zero, is never reused by the controller and that the value in the EUI64 field for this namespace, if non-zero is never reused by the controller. If cleared to '0', then the NGUID value may be reused and the EUI64 value may be reused by the controller for a n3333ew namespace created after this namespace is deleted. This bit shall be cleared to '0' if both NGUID and EUI64 fields are cleared to 0h. Refer to NVMe Base Specification, section 7.11.
Mandatory	Yes	Yes
Notes		Returned in byte 24, bit 3 or the Namespace Features (NSFEAT) of the of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247).

### ${\bf 6.5.2.22\ \ NVMeNames pace Properties.} Names pace Features. Supports Atomic Transaction Size$

The mapping for NVMeNamespaceProperties.NamespaceFeatures.SupportsAtomicTransactionSize is summarized in Table 147.

**Table 147:**NVMeNamespaceProperties.NamespaceFeatures. SupportsAtomicTransactionSize mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeNam espaceProperties .NamespaceFeatur es.SupportsAtomi cTransactionSize	NVM Spec Property / Field: OPTPERF NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 4 of Byte 24
Description	Indicates whether or not the NVM fields for Namespace preferred write granularity (NPWG), write alignment (NPWA), deallocate granularity (NPDG), deallocate alignment (NPDA) and optimimal write size (NOWS) are defined for this namespace and should be used by the host for I/O optimization.	Indicates support for the fields NPWG, NPWA, NPDG, NPDA, and NOWS for this namespace; and optimal Write Size field in NVM Sets Attributes Entry

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall indicate whether or not the NVM fields for Namespace preferred write granularity (NPWG), write alignment (NPWA), deallocate granularity (NPDG), deallocate alignment (NPDA) and optimimal write size (NOWS) are defined for this namespace and should be used by the host for I/O optimization.	If set to '1' indicates that the fields NAWUN, NAWUPF, and NACWU are defined for this namespace and should be used by the host for this namespace instead of the AWUN, AWUPF, and ACWU fields in the Identify Controller data structure. If cleared to '0', then the controller does not support the fields NAWUN, NAWUPF, and NACWU for this namespace. In this case, the host should use the AWUN, AWUPF, and ACWU fields defined in the Identify Controller data structure in Figure 247. Refer to NVMe Base Specification section 6.4.
Mandatory	Yes	Yes
Notes		Returned in byte 24, bit 4 of the Namespace Features (NSFEAT) of the of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247).

### 6.5.2.23 NVMeNamespaceProperties.NamespaceFeatures.SupportsIOPerformanceHints

The mapping for NVMeNamespaceProperties.NamespaceFeatures.SupportsIOPerformanceHints is summarized in Table 148.

**Table 148:**NVMeNamespaceProperties.NamespaceFeatures. SupportsIOPerformanceHints mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMe NamespacePropert ies.NamespaceFea tures.SupportsIO PerformanceHints	NVM Spec Property / Field: NSABP NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Boolean	NVM Spec Property Type: Single bit (bool) Additional NVM Spec Identifying Information: Bit 1 of Byte 24
Description	Indicates that the Namepsace Atomic Write Unit Normal (NAWUN), Namespace Atomic Write Unit Power Fail (NAWUPF), and Namespace Atomic Compare and Write Unit (NACWU) fields are defined for this namespace and should be used by the host for this namespace instead of the controller-level properties AWUN, AWUPF, and ACWU.	indicates whether or not the fields NAWUN, NAWUPF, and NACWU are defined for this namespace and should be used by the host for this namespace instead of the AWUN, AWUPF, and ACWU fields in the Identify Controller data structure.

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall indicate that the Namepsace Atomic Write Unit Normal (NAWUN), Namespace Atomic Write Unit Power Fail (NAWUPF), and Namespace Atomic Compare and Write Unit (NACWU) fields are defined for this namespace and should be used by the host for this namespace instead of the controller-level properties AWUN, AWUPF, and ACWU.	If set to '1' indicates that the fields NAWUN, NAWUPF, and NACWU are defined for this namespace and should be used by the host for this namespace instead of the AWUN, AWUPF, and ACWU fields in the Identify Controller data structure. If cleared to '0', then the controller does not support the fields NAWUN, NAWUPF, and NACWU for this namespace. In this case, the host should use the AWUN, AWUPF, and ACWU fields defined in the Identify Controller data structure in NVMe Base Specification Figure 247. Refer to NVMe Base Specification section 6.4.
Mandatory	Yes	Yes
Notes		Returned in byte 24, bit 1 of the Namespace Features (NSFEAT) of the of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247).

**6.5.2.24 NVMeNamespaceProperties.NumberLBAFormats** The mapping for NVMeNamespaceProperties.NumberLBAFormats is summarized in Table 149.

 Table 149:
 150:
 NVMeNamespaceProperties.NumberLBAFormats mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeName spaceProperties. NumberLBAFor- mats	NVM Spec Property / Field: Number of LBA Formats (NLBAF) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Туре	Int64	Type:** Int64 Additional NVM Spec Identifying Information: ByteOffset: 25
Description	The number of LBA data size and metadata size combinations supported by this namespace. The value of this property is between 0 and 16.	The number of supported LBA data size and metadata size combinations supported by the namespace.

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain the number of LBA data size and metadata size combinations supported by this namespace. The value of this property is between 0 and 16. LBA formats with an index set beyond this value will not be supported.	This property shall contain the number of LBA formats allocated in order starting with 0 and packed sequentially. This is a 0's based value. The maximum number of LBA formats that may be indicated as supported is 16. The supported LBA formats are indicated in bytes 128 to 191 in this data structure. The LBA Format fields with an index beyond the value set in this field are invalid and not supported. LBA Formats that are valid, but not currently available may be indicated by setting the LBA Data Size for that LBA Format to 0h.
Mandatory	Yes	Yes
Notes		Returned in byte 25 (Number of LBA Formats) of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 & figure 247.

**6.5.2.25 NVMeNamespaceProperties.FormattedLBASize** The mapping for NVMe-NamespaceProperties.FormattedLBASize is summarized in Table 150.

 Table 150:
 NVMeNamespaceProperties.FormattedLBASize mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeName spaceProperties. FormattedLBASize	NVM Spec Property / Field: Formatted LBA Size (FLBAS) NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Туре	Int64	Type:** Int64 Additional NVM Spec Identifying Information: ByteOffset: 26
Description	The LBA data size and metadata size combination that the namespace has been formatted with.	The LBA data size and metadata size combination that the namespace has been formatted with.
LongDescription	This property shall contain the LBA data size and metadata size combination that the namespace has been formatted with. This is a 4-bit data structure.	This field indicates the LBA data size & metadata size combination that the namespace has been formatted with (refer to section 5.23). Bits 3:0 indicates one of the 16 supported LBA Formats indicated in this data structure.
Mandatory	Yes	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes		Returned in byte 26
		(Formatted LBA Size), bits
		3:0 of the Identify
		Namespace Data Structure
		(Reference NVMe Base
		Specification section
		5.15.2.1 and figure 247.

### ${\bf 6.5.2.26\ NVMeName space Properties. Metadata Transferred At End Of Data LBA}$

The mapping for NVMeNamespaceProperties.MetadataTransferredAtEndOfDataLBA is summarized in Table 151.

**Table 151:** NVMeNamespaceProperties.MetadataTransferredAtEndOfDataLBA mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeNames paceProperties.M etadataTransferr edAtEndOfDataLBA	NVM Spec Property / Field: Metadata transferred at end of LBA NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.1 (Identify Namespace), Figure 247
Type	Boolean	Type:** Bit (bool)  Additional NVM Spec  Identifying Information:  Bit 4 of Byte 26
Description	This property indicates whether or not the metadata is transferred at the end of the LBA creating an extended data LBA.	This property indicates whether or not the metadata is transferred at the end of the data LBA.

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall indicate whether or not the metadata is transferred at the end of the LBA creating an extended data LBA.	If set to '1' indicates that metadata is transferred at the end of the data LBA, creating an extended data LBA. Bit 4 if cleared to '0' indicates that all of the metadata for a command is transferred as a separate contiguous buffer of data.
Mandatory	Yes	Yes
Notes		Returned in byte 26 (Formatted LBA Size), bit 4 of the Identify Namespace Data Structure (Reference NVMe Base Specification section 5.15.2.1 and figure 247. Bit 4 is not applicable when there is no metadata.

**6.5.2.27 NVMeNamespaceProperties.NVMeVersion** The mapping for NVMeNamespaceProperties.NVMeVersion is summarized in Table 152.

**Table 152:** NVMeNamespaceProperties.NVMeVersion mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVM eNamespaceProper ties.NVMeVersion	Version (VER)
Туре	String	Int64
Description	The version of the NVMe Base Specification supported.	This property shall contain the version of the NVMe Base Specification supported.

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription		Indicates the major, minor, and tertiary version of the NVM Express base specification that the controller implementation supports. Valid versions of the specification are: 1.0, 1.1, 1.2, 1.2.1, 1.3, and 1.4.
Mandatory	Yes	Yes
Notes		Returned in bytes 83:80 of the Identify Controller data structure - CNS 01h (reference NVMe Base Specification section 5.15.2.2 and figure 249.

**6.5.2.28 OptimumIOSizeBytes** The mapping for OptimumIOSizeBytes is summarized in Table 153.

Table 153: OptimumIOSizeBytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Op timumIOSizeBytes	NVM Spec Property / Field: Namespace Optimal Write Size (NOWS) NVM Spec: Section:Figure Figure 247: Bytes 73:72
Туре	Int64	
Description	The size in bytes of this Volume's optimum IO size.	N/A

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain the optimum IO size to use when performing IO on this volume. For logical disks, this is the stripe size. For physical disks, this describes the physical sector size.	This field indicates the size in logical blocks for optima write performance for this namespace. This is a 0's based value.
Mandatory	Recommended for implementations with Endurance Groups and NVM Sets.	
Notes		Convert from blocks to bytes.

**6.5.2.29 ProvisioningPolicy** The mapping for ProvisioningPolicy is summarized in Table 154.

 Table 154: OptimumIOSizeBytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Pr ovisioningPolicy	NVM Spec Property / Field: Identify Namespace / THINP NVM Spec: Section:Figure 247: Byte 24, Bit 0
Type	enum (DataStorageLoS Capabilities.Pro visioningPolicy)	

	R edfish/Swordfish	NVMe / NVMe-oF
Description	This property specifies the volume's storage allocation, or provisioning policy.	N/A
LongDescription	This property shall specify the volume's supported storage allocation policy.	
Mandatory	Recommended for implementations that support thin provisioning.	Figure 247: Byte 24, Bit 0 indicates thin provisioning support for the namespace
Notes	possible values: Fixed / Thin	

### **6.5.2.30 Status.State** The mapping for Status.state is summarized in Table 155.

**Table 155:** Status. State mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.State	Enable (EN)
Туре	Resource.State (enum)	Boolean
Description	The known state of the resource, such as, enabled.	Indicates if the controller is in 'enabled' state.

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	When set to '1', then the
	indicate whether	controller shall process
	and why this	commands based on
	component is	Submission Queue Tail
	available. Enabled	doorbell writes. When
	indicates the	cleared to '0', then the
	resource is available.	controller shall not process
	Disabled indicates	commands nor post
	the resource has	completion queue entries
	been intentionally	to Completion Queues.
	made unavailable	When this bit transitions
	but can be enabled.	from '1' to '0', the controlle
	Offline indicates the	is reset (i.e., a Controller
	resource is	Reset). That reset deletes
	unavailable	all I/O Submission Queues
	intentionally and	and I/O Completion
	requires action to	Queues, resets the Admin
	make it available.	Submission Queue and
	InTest indicates that	Completion Queue, and
	the component is	brings the hardware to an
	undergoing testing.	idle state.
	Starting indicates	
	that the resource is	
	becoming available.	
	Absent indicates the	
	resource is	
	physically	
	unavailable.	
Mandatory	Yes	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values:	Reference Controller
	Enabled / Disabled /	Configuration (CC), offset
	StandbyOffline /	14h, bit 00 of the NVMe Base
	StandbySare / InTest	Specification (figure 78)
	/ Starting / Absent /	
	Un availableOffline /	
	Deferring / Quiesced	
	/ Updating /	
	Qualified	

**6.5.2.31 Status.Health** The mapping for Status.Health is summarized in Table 156.

Table 156: Status. Health mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.Health	Controller Fatal Status (CSTS.CFS)
Туре	Resource.Health	Bit
Description	The health state of this resource in the absence of its dependent resources.	Indicates if the controller is able to communicate with host software via completion queue entries in the Admin Completion Queue or I/O Completion Oueues.

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	If the controller has a serious error condition and is unable to communicate with host software via completion queue entries in the Admin Completion Queue or I/O Completion Queues, then the controller may set the Controller Fata Status (CSTS.CFS) bit to '1' (refer to section 3.1.6). This indicates to host software that a serious error condition has occurred. When this condition occurs host software should attempt to reset and then re-initialize the controller. The Controller Fatal Status condition is not indicated with an interrupt. If host software experiences timeout conditions and/or repeated errors, then host software should consult the Controller Fatal Status (CSTS.CFS) bit to determine if a more serious error has occurred.
Mandatory	Yes	Yes
Notes	Possible Values: OK / Warning / Critical	Reference Figure 222 (NVM Subsystem Hardware Error Event Codes) bit 09h of the NVMe Base Specification.

**6.5.2.32 Status.HealthRollup** The mapping for Status.HealthRollup is summarized in Table 157.

Table 157: Status. Health Rollup mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Sta tus.HealthRollup	N/A
Туре	Resource.Health	N/A
Description	The overall health state from the view of this resource.	N/A
LongDescription	This property shall represent the health state of the resource and its dependent resources. The values shall conform to those defined in the Redfish Specification.	N/A
Mandatory	No	N/A
Notes	Do not use for Namespace. There are no dependent resources.	Do not implement.

**6.5.2.33 StorageGroups** The mapping for StorageGroups is summarized in Table 158.

Table 158: StorageGroups mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	StorageGroups	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	StorageGroupC ollection.Storag eGroupCollection	N/A
Description	An array of references to Storage Groups that includes this volume.	N/A
LongDescription	The value of this property shall contain references to all storage groups that include this volume.	N/A
Mandatory	Do Not Implement	
Notes		

### **6.5.2.34 WriteCachePolicy** The mapping for WriteCachePolicy is summarized in Table 159.

Table 159: WriteCachePolicy mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	WriteCachePolicy	NVM Spec Property / Field: N/A NVM Spec Section:Figure N/A
Туре	StorageGroupC ollection.Storag eGroupCollection	N/A
Description	Indicates the write cache policy setting for the Volume	N/A
LongDescription	This property shall contain a boolean indicator of the write cache policy for the Volume.	N/A
Mandatory	Recommended.	
Notes	Possible Values: WriteThrough, Pro tectedWriteBack, Unpro tectedWriteBack, Off. Set to "Off" when write cache disabled; set to other values when enabled.	

#### **6.6 Endurance Group**

The Redfish/Swordfish Storage Pool schema is used to represent an NVM Endurance Group.

#### 6.6.1 Mockup

The following mockup shows a sample representation of the Storage Pool schema used to represent an NVM Endurance Group.

```
"@Redfish.Copyright": "Copyright 2015-2020 SNIA. All rights reserved.",
"@odata.id":
→ "/redfish/v1/Storage/FabricAttachArray/StoragePools/EnduranceGroup1",
"@odata.type": "#StoragePool.v1_4_0.StoragePool",
"Id": "1",
"Name": "Endurance Group 1",
"Description": "Single Endurance Group",
"Status": {
  "State": "Enabled",
  "Health": "OK"
},
"NVMeEnduranceGroupProperties": {
  "EndGrpLifetime": {
    "PercentUsed": 0,
    "EnduranceEstimate": 0,
    "DataUnitsRead": 0,
    "DataUnitsWritten": 0,
    "MediaUnitsWritten": 0,
    "HostReadCommandCount": 0,
    "HostWriteCommandCount": 0,
    "MediaAndDataIntegrityErrorCount": 0,
    "ErrorInformationLogEntryCount": 0
  }
},
  "Capacity": {
    "Data": {
     "AllocatedBytes": 10995116277760,
      "ConsumedBytes": 10995116277760
    }
  },
```

#### 6.6.2 Property Mapping

**6.6.2.1 AllocatedPools** The mapping for AllocatedPools is summarized in Table 160.

Table 160: Allocated Pools mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	AllocatedPools	
Туре	StoragePool Collection.Stora gePoolCollection	
Description	A reference to the collection of storage pools allocated from this storage pool.	
LongDescription	The value of this property shall contain a reference to the collection of storage pools allocated from this storage pool.	
Mandatory	Required.	
Notes	Contains a pointer to the NVM Set allocated from this Endurance Group.	

# **6.6.2.2 Capacity.Data.AllocatedBytes** The mapping for Capacity.Data.AllocatedBytes is summarized in Table 161.

Table 161: Capacity. Data. Allocated Bytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Capacity.Dat a.AllocatedBytes	The Total Endurance Group Capacity. Just the "Total Endurance Group Capacity in the Endurance Group Log See 5.14.1.9 + TP 4009
Туре	Int64	
Description	The number of bytes currently allocated by the storage system in this data store for this data type.	
LongDescription	The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.	
Mandatory	Required for NVMe Drives.	
Notes		Note: This is not in 1.4a because TP 4009 was not integrated.

## **6.6.2.3 Capacity.Data.ConsumedBytes** The mapping for Name is summarized in Table 162.

Table 162: Capacity. Data. Consumed Bytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Capacity.Da ta.ConsumedBytes	The Consumed (allocated to NVM Sets) Endurance Group Capacity. Just the "Total Endurance Group Capacity" (TEGCAP) minus the Uallocated Endurance Group Capacity (UEGCAP) in the Endurance Group Log See 5.14.1.9 + TP 4009
Туре	Int64	
Description	The number of bytes consumed in this data store for this data type.	
LongDescription	The value shall be the number of logical bytes currently consumed in this data store for this data type.	
Mandatory	Required for NVMe Drives.	
Notes		Note: This is not in 1.4a because TP 4009 was not integrated.

### **6.6.2.4 CapacitySources** The mapping for CapacitySources is summarized in Table 163.

Table 163: CapacitySources mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	CapacitySources	
Туре	Col lection(Capacity .CapacitySource)	
Description	An array of space allocations to this volume.	
LongDescription	Fully or partially consumed storage from a source resource. Each entry provides capacity allocation information from a named source resource.	
Mandatory	Required for NVMe Drives.	
Notes	Contains the information about the providing capacity (e.g, EnduranceGroup) for this namespace.	

### **6.6.2.5 CapacitySources@odata.count** The mapping for CapacitySources@odata.count is summarized in Table 164.

Table 164: CapacitySources@odata.count mapping

NVMe / NVMe-oF
This should be the same as the number of NVM Sets in the endurance group.

#### **6.6.2.6 Description** The mapping for Description is summarized in Table 165.

Table 165: Description mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Туре	String	N/A
Description	The description of this resource.	
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specifi cation-described requirements.	
Mandatory		
Notes	In Redfish, Description is a read-only field.	Return the common description: "An Endurance Group consists of zero or more NVM Sets. Endurance Groups divide the media into distinct wear-leveling domains."

**6.6.2.7 Links.OwningStorageResource** The mapping for Links.OwningStorageResource is summarized in Table 166.

Table 166: Links.OwningStorageResource mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Links.Ownin gStorageResource	
Туре	Storage.Storage	
Description	A pointer to the Storage resource that owns or contains this StoragePool.	
LongDescription	This shall be a pointer to the Storage resource that owns or contains this StoragePool.	
Mandatory	Required.	
Notes	Contains a pointer to the NVM Subsystem that contains this Endurance Group.	

### **6.6.2.8 Name** The mapping for Name is summarized in Table 167.

Table 167: Name mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Name	Endurance Group ID NVM Spec: Section:Figure NVMe 1.4a: Section 5.14,1,9, Get Log Page - Endurance Group Log
Туре	String	16-bit value
Description	The name of the resource or array member.	
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	
Mandatory		
Notes	In Redfish, Name is a read-only field.	Map the Endurance Group ID field to a string with the format: "0xABCD"

**6.6.2.9 NVMeProperties.NVMePoolType** The mapping for NVMeProperties.NVMePoolType is summarized in Table 168.

 Table 168:
 NVMeProperties.NVMePoolType

	- 16 1 (c 16 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
	R edfish/Swordfish NVMe / NVMe-
Property	StorageP
	ool.NVMePoolType
Type	Enum
Description	Indicates whether
	the StoragePool is
	used as an
	EnduranceGroup or
	an NVMSet.
LongDescription	This property shall
	indicate whether the
	StoragePool is used as an
	EnduranceGroup or
	an NVMSet.
Mandatory	Required
Notes	Set as
	"EnduranceGroup"

#### ${\bf 6.6.2.10\ NVMeEnduranceGroup Properties. Predicted Media Life Left Percent}$

The mapping for NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent is summarized in Table 169.

**Table 169:** NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEndura nceGroupProperti es.PredictedMedi aLifeLeftPercent	"Percentage Used" in the Endurance Group Log. See 5.14.1.9
Туре	Decimal %	
Description	The percentage of reads and writes that are predicted to be available for the media.	
LongDescription	This property shall contain an indicator of the percentage of life remaining in the drive's media.	
Mandatory	Required	
Notes		Inverse of "Percentage Used" in the Endurance Group Log. See 5.14.1.9. Subtract the percentage used from 100% to report this value.

**6.6.2.11 NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed** The mapping for NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed is summarized in Table 170.

**Table 170:** NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEnd uranceGroupPrope rties.EndGrpLife time.PercentUsed	"Percentage Used" in the Endurance Group Log. See 5.14.1.9
Туре	Int64	
Description	A vendor-specific estimate of the percent life used for the endurance group based on the actual usage and the manufacturer prediction of NVM life.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	contain A	
	vendor-specific	
	estimate of the	
	percent life used for	
	the endurance	
	group based on the	
	actual usage and the	
	manufacturer	
	prediction of NVM	
	life. A value of 100	
	indicates that the	
	estimated	
	endurance of the	
	NVM in the	
	<b>Endurance Group</b>	
	has been consumed,	
	but may not indicate	
	an NVM failure.	
	According to the	
	NVMe and JEDEC	
	specs, the value is	
	allowed to exceed	
	100. Percentages	
	greater than 254	
	shall be represented	
	as 255.	
Mandatory	Required	
Notes		

#### ${\bf 6.6.2.12\ NVMeEnduranceGroup Properties. End GrpLifetime. Endurance Estimate}$

The mapping for NVMeEnduranceGroupProperties. EndGrpLifetime. EnduranceEstimate is summarized in Table 171.

**Table 171:** NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate mapping

R edfish/Swordfish	NVMe / NVMe-oF
NVMeEndurance GroupProperties. EndGrpLifetime.E nduranceEstimate	"Endurance Estimate" in the Endurance Group Log. See 5.14.1.9
Int64	
This property contains an estimate of the total number of data bytes that may be written to the Endurance Group over the lifetime of the Endurance Group assuming a write amplication of 1.	
	NVMeEndurance GroupProperties. EndGrpLifetime.E nduranceEstimate Int64 This property contains an estimate of the total number of data bytes that may be written to the Endurance Group over the lifetime of the Endurance Group

	R edfish/Swordfish NVMe / NVM	Me-oF
LongDescription	This property shall	
	contain an estimate	
	of the total number	
	of data bytes that	
	may be written to	
	the Endurance	
	Group over the	
	lifetime of the	
	Endurance Group	
	assuming a write	
	amplication of 1.	
	The value is	
	reported in billions,	
	where a value of 1	
	corresponds to 1	
	billion bytes written,	
	and is rounded up. A	
	value of zero	
	indicates endurance	
	estimates are	
	unsupported.	
Mandatory	Required	
Notes		

#### ${\bf 6.6.2.13\ NVMeEndurance Group Properties. End GrpLifetime. Data Units Read}$

The mapping for NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead is summarized in Table 172.

**Table 172:** NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEndur anceGroupPropert ies.EndGrpLifeti me.DataUnitsRead	
Туре	Int64	
Description	The property contains the total number of data units read from this endurance group.	

	R edfish/Swordfish NVMe / N	IVMe-oF
LongDescription	The property shall	
	contain the total	
	number of data	
	units read from this	
	endurance group.	
	This value does not	
	include controller	
	reads due to internal	
	operations such as	
	garbage collection.	
	The value is	
	reported in billions,	
	where a value of 1	
	corresponds to 1	
	billion bytes written,	
	and is rounded up. A	
	value of zero	
	indicates the	
	property is	
	unsupported.	
Mandatory	Required	
Notes		

#### ${\bf 6.6.2.14\ NVMeEnduranceGroup Properties. End GrpLifetime. Data Units Written}$

The mapping for NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten is summarized in Table 173.

**Table 173:** NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEnduranc eGroupProperties .EndGrpLifetime. DataUnitsWritten	"Data Units Written" in the Endurance Group Log. See 5.14.1.9
Туре	Int64	
Description	The property contains the total number of data units written from this endurance group.	

	R edfish/Swordfish NVMe / NVMe
LongDescription	The property shall
	contain the total
	number of data
	units written from
	this endurance
	group. This value
	does not include
	controller writes due
	to internal
	operations such as
	garbage collection.
	The value is
	reported in billions,
	where a value of 1
	corresponds to 1
	billion bytes written,
	and is rounded up. A
	value of zero
	indicates the
	property is
	unsupported.
Mandatory	Required
Notes	

#### ${\bf 6.6.2.15\ NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten}$

The mapping for NVMeEnduranceGroupProperties. EndGrpLifetime. MediaUnitsWritten is summarized in Table 174.

**Table 174:** NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEndurance GroupProperties. EndGrpLifetime.M ediaUnitsWritten	"Media Units Written" in the Endurance Group Log. See 5.14.1.9
Туре	Int64	
Description	The property contains the total number of data units written from this endurance group.	

	R edfish/Swordfish NVMe / NVMe	-oF
LongDescription	The property shall	
	contain the total	
	number of data	
	units written from	
	this endurance	
	group. This value	
	includes host and	
	controller writes due	
	to internal	
	operations such as	
	garbage collection.	
	The value is	
	reported in billions,	
	where a value of 1	
	corresponds to 1	
	billion bytes written,	
	and is rounded up. A	
	value of zero	
	indicates the	
	property is	
	unsupported.	
Mandatory	Required	
Notes		

#### ${\bf 6.6.2.16\ NVMeEnduranceGroup Properties. End GrpLifetime. Host Read Command Count}$

The mapping for NVMeEnduranceGroupProperties.EndGrpLifetime.HostReadCommandCount is summarized in Table 175.

**Table 175:** NVMeEnduranceGroupProperties.EndGrpLifetime. HostReadCommandCount mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEnduranceGro upProperties.End GrpLifetime.Host ReadCommand- Count	"Host Read Commands" in the Endurance Group Log. See 5.14.1.9
Туре	Int64	
Description	This property contains the number of read commands completed by all controllers in the NVM subsystem for the Endurance Group.	
LongDescription	This property shall contain the number of read commands completed by all controllers in the NVM subsystem for the Endurance Group. For the NVM command set, the is the number of compare commands and read commands.	
Mandatory	Required	

Swordfish NVMe Model Overview and Mapping Guide		Version 1.2.2a
	R edfish/Swordfish	NVMe / NVMe-oF
Notes		

#### $6.6.2.17\ NV Me Endurance Group Properties. End Grp Lifetime. Host Write Command Count$

The mapping for NVMeEnduranceGroupProperties. EndGrpLifetime. HostWriteCommandCount is summarized in Table 176.

**Table 176:** NVMeEnduranceGroupProperties.EndGrpLifetime. HostWriteCommandCount mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	N VMeEnduranceGrou pProperties.EndG rpLifetime.HostW riteCommandCount	"Host Write Commands" in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains the number of write commands completed by all controllers in the NVM subsystem for the Endurance Group.	
LongDescription	This property shall contain the number of write commands completed by all controllers in the NVM subsystem for the Endurance Group. For the NVM command set, the is the number of compare commands and write commands.	
Mandatory	Required	

Swordfish NVMe Model Overview and Mapping Guide		Version 1.2.2a
	- 10.1.0	
	R edfish/Swordfish	NVMe / NVMe-oF
Notes		

#### $6.6.2.18\ NV Me Endurance Group Properties. End Grp Lifetime. Media And Data Integrity Error Count$

The mapping for NVMeEnduranceGroupProperties. EndGrpLifetime. MediaAndDataIntegrityErrorCount is summarized in Table 177.

**Table 177:** NVMeEnduranceGroupProperties.EndGrpLifetime. MediaAndDataIntegrityErrorCount mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEnduran ceGroupPropertie s.EndGrpLifetime .MediaAndDataInt egrityErrorCount	"Media and Data Integrity Errors" in the Endurance Group Log. See 5.14.1.9
Туре	Int64	
Description	This property contains the number of occurences where the controller detected an unrecovered data integrity error for the Endurance Group.	
LongDescription	This property shall contain the number of occurences where the controller detected an unrecovered data integrity error for the Endurance Group. Errors such as uncorrectable ECC, CRC checksum failure, or LBA tag mismatch are included in this field.	

	R edfish/Swordfish	NVMe / NVMe-oF
Mandatory	Required	
Notes		

#### ${\bf 6.6.2.19\ NVMeEndurance Group Properties. End GrpLife time. Error Information Log Entry Count}$

 $The \, mapping \, for \, {\tt NVMeEnduranceGroupProperties.EndGrpLifetime.ErrorInformationLogEntryCount} is \, summarized \, in \, Table \, 178.$ 

**Table 178:** NVMeEnduranceGroupProperties.EndGrpLifetime. ErrorInformationLogEntryCount mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEndur anceGroupPropert ies.EndGrpLifeti me.ErrorInformat ionLogEntryCount	"Number of Error Information Log Entries" in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	This property contains the number of error information log entries over the life of the controller for the endurance group.	
LongDescription	This property shall contain the number of error information log entries over the life of the controller for the endurance group.	
Mandatory	Required	
Notes		

**6.6.2.20 NVMeSetProperties.SetIdentifier** The mapping for NVMeSetProperties.SetIdentifier is summarized in Table 179.

Table 179: NVMeSetProperties.SetIdentifier

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSetProperti es.SetIdentifier	NVM Spec Property / Field: NVMSETID NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Туре	String	NVM Spec Property Type: 16-bit value Additional NVM Spec Identifying Information: ByteOffset: 01:00
Description	A 16-bit hex value that contains the NVMe Set identifier.	
LongDescription	This property shall contain a 16-bit hex value that contains the NVMe Set identifier. The NVM Set identifier is unique within a subsystem. Reserved values include 0.	
Mandatory	Do Not Implement.	
Notes		Do not implement NVMeSetProperties as part of an EnduranceGroup.

**6.6.2.21 NVMeSetProperties.OptimalWriteSizeBytes** The mapping for NVMeSet-Properties.OptimalWriteSizeBytes is summarized in Table 180.

 Table 180:
 NVMeSetProperties.OptimalWriteSizeBytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSet Properties.Optim alWriteSizeBytes	NVM Spec Property / Field: OptimalWriteSize NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.5 Figure 253: NVM Set Attributes Entry
Туре	Int64	NVM Spec Property Type: Bytes Additional NVM Spec Identifying Information: ByteOffset: 15:12
Description	This property contains the Optimal Write Size in Bytes for this NVMe Set.	
LongDescription	This property shall contain the Optimal Write Size in Bytes for this NVMe Set.	
Mandatory	Do Not Implement.	
Notes		Do not implement  NVMeSetProperties as part  of an EnduranceGroup.

**6.6.2.22 NVMeSetProperties.EnduranceGroupIdentifier** The mapping for NVMe-SetProperties.EnduranceGroupIdentifier is summarized in Table 181.

Table 181: NVMeSetProperties.EnduranceGroupIdentifier mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSetPro perties.Enduranc eGroupIdentifier	NVM Spec Property / Field: En duranceGroupIdentifier NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.5 Figure 253: NVM Set Attributes Entry
Туре	String	NVM Spec Property Type: 2 bytes Additional NVM Spec Identifying Information: ByteOffset: 03:02
Description	A 16-bit hex value that contains the endurance group identifier.	
LongDescription	This property shall contain a 16-bit hex value that contains the endurance group identifier. The endurance group identifier is unique within a subsystem. Reserved values include 0.	
Mandatory	Do Not Implement.	
Notes		Do not implement  NVMeSetProperties as part  of an EnduranceGroup.

**6.6.2.23 NVMeSetProperties.Random4kReadTypicalNanoSeconds** The mapping for NVMeSetProperties.Random4kReadTypicalNanoSeconds is summarized in Table 182.

Table 182: NVMeSetProperties.Random4kReadTypicalNanoSeconds mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSetPropertie s.Random4kReadTy picalNanoSeconds	NVM Spec Property / Field: Random 4 KiB Read Typical NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	Int64	NVM Spec Property Type: 4 bytes Additional NVM Spec Identifying Information: ByteOffset: 11:08
Description	Indicates the typical time to complete a 4k read in 100 nano-second units when the NVM Set is in a Predictable Latency Mode Deterministic Window and there is 1 outstanding command per NVM Set.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	contain the typical	
	time to complete a	
	4k read in 100	
	nano-second units	
	when the NVM Set is	
	in a Predictable	
	Latency Mode	
	Deterministic	
	Window and there is	
	1 outstanding	
	command per NVM	
	Set.	
Mandatory	Do Not Implement.	
Notes		Do not implement
		NVMeSetProperties as part
		of an EnduranceGroup.

# **6.6.2.24 Status.Health** The mapping for Name is summarized in Table 183.

Table 183: Status. Health mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.Health	N/A
Туре	Resource.Health	N/A
Description	The health state of this resource in the absence of its dependent resources.	
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
Mandatory		Do not implement
Notes	Possible Values: OK / Warning / Critical	There is not a clear mapping for health of an Endurance Group. Do not implement this property.

# **6.6.2.25 Status.State** The mapping for Status. State is summarized in Table 184.

Table 184: Status. State mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.State	N/A
Туре	Resource.State (enum)	N/A
Description	The known state of the resource, such as, enabled.	

indicate whether and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		R edfish/Swordfish	NVMe / NVMe-oF
and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.	LongDescription	This property shall	
component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		indicate whether	
available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		and why this	
indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		component is	
resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		available. Enabled	
Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		indicates the	
the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		resource is available.	
been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		Disabled indicates	
made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		the resource has	
but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		been intentionally	
enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		made unavailable	
indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		but it can be	
resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		enabled. Offline	
unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		indicates the	
intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		resource is	
requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		unavailable	
make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		intentionally and	
InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		requires action to	
the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		make it available.	
undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		InTest indicates that	
Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.		the component is	
that the resource is becoming available. Absent indicates the resource is physically unavailable.		undergoing testing.	
becoming available. Absent indicates the resource is physically unavailable.		Starting indicates	
Absent indicates the resource is physically unavailable.		that the resource is	
resource is physically unavailable.		becoming available.	
physically unavailable.		Absent indicates the	
unavailable.		resource is	
		physically	
Mandatony Do not implemen		unavailable.	
manuatory Do not implement	Mandatory		Do not implemen

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values: Enabled / Disabled / StandbyOffline / StandbySare / InTest / Starting / ABsent / Una vaialableOffline / Deferring / Quiesced / Updating / Qualified	There is not a clear mapping for State of an Endurance Group. Do not implement this property.

#### 6.7 NVM Set

The Redfish/Swordfish Storage Pool schema is used to represent an NVM Set.

#### **6.7.1 Mockup**

The following mockup shows a sample representation of the Storage Pool schema used to represent an NVM Set.

```
"@Redfish.Copyright": "Copyright 2015-2020 SNIA. All rights reserved.",
  "@odata.id": "/redfish/v1/Storage/FabricAttachArray/StoragePools/NVMeSet1",
  "@odata.type": "#StoragePool.v1_4_0.StoragePool",
  "Id": "1",
  "Name": "Set 1",
  "Description": "First Set",
  "Status": {
   "State": "Enabled",
    "Health": "OK"
 },
  "NVMeSetProperties": {
    "SetIdentifier": "0x1F",
    "EnduranceGroupIdentifier": "0x1",
    "Random4kReadTypicalNanoSeconds": 34534345348,
    "UnallocatedNVMNamespaceCapacityBytes": 5497558138880,
    "OptimalWriteSizeBytes": 512
 },
  "Capacity": {
    "Data": {
     "AllocatedBytes": 10995116277760,
     "ConsumedBytes": 5497558138880
   }
 },
  "AllocatedVolumes": {
    "@odata.id": "/red-
    → fish/v1/Storage/FabricAttachArray/StoragePools/NVMeSet1/AllocatedVolumes"
 }
}
```

### **6.7.2 Property Mapping**

# **6.7.2.1 AllocatedVolumes** The mapping for AllocatedVolumes is summarized in Table 185.

Table 185: Allocated Volumes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	AllocatedVolumes	NVM Spec Property / Field: NVM Spec: Section:Figure
Туре	V olumeCollection. VolumeCollection	
Description	A reference to the collection of volumes allocated from this storage pool.	
LongDescription	The value of this property shall contain a reference to the collection of volumes allocated from this storage pool.	
Mandatory	Required.	
Notes	A pointer to the set of namespaces allocated from this NVM Set.	The allocated volumes contains pointers to the allocated volumes objects. These are the set of namespaces created from this NVM Set.

# **6.7.2.2 Capacity.Data.AllocatedBytes** The mapping for Name is summarized in Table 186

Table 186: Capacity. Data. Allocated Bytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Capacity.Dat a.AllocatedBytes	NVM Spec Property / Field: Total NVM Set Capacity NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	Int64	NVM Spec Property Type: bytes Additional NVM Spec Identifying Information: ByteOffset: 31:16 for Total NVM Set Capacity
Description	The number of bytes currently allocated by the storage system in this data store for this data type.	
LongDescription	The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.	
Mandatory	Required	
Notes		

**6.7.2.3 Capacity.Data.ConsumedBytes** The mapping for Capacity.Data.ConsumedBytes is summarized in Table 187.

Table 187: Capacity. Data. Consumed Bytes mapping

Property Capacity.Da ta.ConsumedByt  Type Int64	NVM Spec Property / es Field: Total NVM Set Capacity, Unallocated NVM Set Capacity NVM Spec:
Type Int64	<b>Section: Figure</b> NVMe 1.4a: Section 5.15.2.5, Figure 253 NVM Set Attributes Entry
	NVM Spec Property Type: bytes Additional NVM Spec Identifying Information: ByteOffset: 31:16 for Total NVM Set Capacity
Byte 47:32 for Unallocated  NVM Set Capacity.	
Description  The maximum number of bytes that can be allocated in this data store for this data type.	S
LongDescription  The value shall be the maximum number of bytes that can be allocated in this data store for this data type.	
Mandatory Required	

	R edfish/Swordfish	NVMe / NVMe-oF
Notes		This is calculated as "Total NVM Set Capacity" - "Unallocated NVM Set Capacity".

**6.7.2.4 CapacitySources** The mapping for CapacitySources is summarized in Table 188.

Table 188: CapacitySources mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	CapacitySources	
<b>Т</b> уре	Col lection(Capacity .CapacitySource)	
escription	An array of space allocations to this volume.	
ongDescription	Fully or partially consumed storage from a source resource. Each entry provides capacity allocation information from a named source resource.	
andatory	Recommended to not implement for NVMe Drives.	
lotes	Contains the information about the providing capacity (e.g, memory) for this namespace.	

**6.7.2.5 CapacitySources@odata.count** The mapping for CapacitySources@odata.count is summarized in Table 189.

Table 189: CapacitySources@odata.count mapping

	Redfish/Swordfish	NVMe / NVMe-oF
Property	CapacitySources@odata.count	
Туре	(odata property)int64	
Description	Count of the number of items in the CapacitySources array.	
LongDescription		
Mandatory	Do not implement for NVMe Drives.	
Notes		

# **6.7.2.6 Description** The mapping for Description is summarized in Table 190.

Table 190: Description mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Description	NVM Spec Property / Field: N/A
Туре	String	N/A
Description	The description of this resource.	See note below.
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specifi cation-described requirements.	
Mandatory		
Notes	In Redfish,  Description is a  read-only field.	Return the common description: "An NVM Set is a collection of NVM that is separate (logically and potentially physically) from NVM in other NVM Sets. One or more namespaces may be created within an NVM Set and those namespaces inherit the attributes of the NVM Set. A namespace is wholly contained within a single NVM Set and shall not span more than one NVM Set."

**6.7.2.7 Links.OwningStorageResource** The mapping for Links.OwningStorageResource is summarized in Table 191.

Table 191: Links.OwningStorageResource mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Links.Ownin gStorageResource	
Туре	Storage.Storage	
Description	A pointer to the Storage resource that owns or contains this StoragePool.	
LongDescription	This shall be a pointer to the Storage resource that owns or contains this StoragePool.	
Mandatory	Required.	
Notes	Contains a pointer to the NVM Subsystem that contains this NVM Set.	

# **6.7.2.8 Name** The mapping for Name is summarized in Table 192

Table 192: Name mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Name	NVM Spec Property / Field: NVMSETID NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	String	NVM Spec Property Type: 16-bit value Additional NVM Spec Identifying Information: ByteOffset: 01:00
Description	The name of the resource or array member.	
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	
Mandatory	Required	

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	In Redfish, Name is a read-only field.	Map the NVMSETID field to a string with the format: "0xABCD"

**6.7.2.9 NVMeProperties.NVMePoolType** The mapping for NVMeProperties.NVMePoolType is summarized in Table 193.

 Table 193:
 NVMeProperties.NVMePoolType

	R edfish/Swordfish NVMe / NVMe-o	ρF
Property	StorageP ool.NVMePoolType	
Туре	Enum	
Description	Indicates whether the StoragePool is used as an EnduranceGroup or an NVMSet.	
LongDescription	This property shall indicate whether the StoragePool is used as an EnduranceGroup or an NVMSet.	
Mandatory	Required	
Notes	Set as "NVMSet"	

### ${\bf 6.7.2.10\ NVMeEnduranceGroup Properties. Predicted Media Life Left Percent}$

The mapping for NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent is summarized in Table 194.

**Table 194:** NVMeEnduranceGroupProperties.PredictedMediaLifeLeftPercent mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEndura nceGroupProperti es.PredictedMedi aLifeLeftPercent	"Percentage Used" in the Endurance Group Log. See 5.14.1.9
Туре	Decimal %	
Description	The percentage of reads and writes that are predicted to be available for the media.	
LongDescription	This property shall contain an indicator of the percentage of life remaining in the drive's media.	
Mandatory	Do Not Implement.	
Notes		Do not implement NVMeEn duranceGroupProperties as part of an NVM Set.

**6.7.2.11 NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed** The mapping for NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed is summarized in Table 195.

**Table 195:** NVMeEnduranceGroupProperties.EndGrpLifetime.PercentUsed mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEnd uranceGroupPrope rties.EndGrpLife time.PercentUsed	"Percentage Used" in the Endurance Group Log. See 5.14.1.9
Туре	Int64	
Description	A vendor-specific estimate of the percent life used for the endurance group based on the actual usage and the manufacturer prediction of NVM life.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	contain A	
	vendor-specific	
	estimate of the	
	percent life used for	
	the endurance	
	group based on the	
	actual usage and the	
	manufacturer	
	prediction of NVM	
	life. A value of 100	
	indicates that the	
	estimated	
	endurance of the	
	NVM in the	
	Endurance Group	
	has been consumed,	
	but may not indicate	
	an NVM failure.	
	According to the	
	NVMe and JEDEC	
	specs, the value is	
	allowed to exceed	
	100. Percentages	
	greater than 254	
	shall be represented	
	as 255.	
Mandatory	Do Not Implement.	
Notes		Do not implement NVMeEn
		duranceGroupProperties as
		part of an NVM Set.

### ${\bf 6.7.2.12\ NVMeEnduranceGroup Properties. End GrpLifetime. Endurance Estimate}$

The mapping for NVMeEnduranceGroupProperties. EndGrpLifetime. EnduranceEstimate is summarized in Table 196.

**Table 196:** NVMeEnduranceGroupProperties.EndGrpLifetime.EnduranceEstimate mapping

R edfish/Swordfish	NVMe / NVMe-oF
NVMeEndurance GroupProperties. EndGrpLifetime.E nduranceEstimate	"Endurance Estimate" in the Endurance Group Log. See 5.14.1.9
Int64	
This property contains an estimate of the total number of data bytes that may be written to the Endurance Group over the lifetime of the Endurance Group assuming a write amplication of 1.	
	NVMeEndurance GroupProperties. EndGrpLifetime.E nduranceEstimate Int64 This property contains an estimate of the total number of data bytes that may be written to the Endurance Group over the lifetime of the Endurance Group

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	contain an estimate	
	of the total number	
	of data bytes that	
	may be written to	
	the Endurance	
	Group over the	
	lifetime of the	
	Endurance Group	
	assuming a write	
	amplication of 1.	
	The value is	
	reported in billions,	
	where a value of 1	
	corresponds to 1	
	billion bytes written,	
	and is rounded up. A	
	value of zero	
	indicates endurance	
	estimates are	
	unsupported.	
Mandatory	Do Not Implement.	
Notes		Do not implement NVMeEn duranceGroupProperties as part of an NVM Set.

### ${\bf 6.7.2.13\ NVMeEnduranceGroup Properties. End GrpLifetime. Data Units Read}$

The mapping for NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead is summarized in Table 197.

**Table 197:** NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsRead mapping

	R edfish/Swordfish NVMe / NVM	le-oF
Property	NVMeEndur anceGroupPropert ies.EndGrpLifeti me.DataUnitsRead	
Type	Int64	
Description	The property contains the total number of data units read from this endurance group.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	The property shall	
	contain the total	
	number of data	
	units read from this	
	endurance group.	
	This value does not	
	include controller	
	reads due to internal	
	operations such as	
	garbage collection.	
	The value is	
	reported in billions,	
	where a value of 1	
	corresponds to 1	
	billion bytes written,	
	and is rounded up. A	
	value of zero	
	indicates the	
	property is	
	unsupported.	
Mandatory	Do Not Implement.	
Notes		Do not implement NVMeEn duranceGroupProperties as part of an NVM Set.

### 6.7.2.14 NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten

The mapping for NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten is summarized in Table 198.

**Table 198:** NVMeEnduranceGroupProperties.EndGrpLifetime.DataUnitsWritten mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEnduranc eGroupProperties .EndGrpLifetime. DataUnitsWritten	"Data Units Written" in the Endurance Group Log. See 5.14.1.9
Туре	Int64	
Description	The property contains the total number of data units written from this endurance group.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	The property shall	
	contain the total	
	number of data	
	units written from	
	this endurance	
	group. This value	
	does not include	
	controller writes due	
	to internal	
	operations such as	
	garbage collection.	
	The value is	
	reported in billions,	
	where a value of 1	
	corresponds to 1	
	billion bytes written,	
	and is rounded up. A	
	value of zero	
	indicates the	
	property is	
	unsupported.	
Mandatory	Do Not Implement.	
Notes		Do not implement NVMeEnduranceGroupProperties as part of an NVM Set.

### ${\bf 6.7.2.15\ NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten}$

The mapping for NVMeEnduranceGroupProperties. EndGrpLifetime. MediaUnitsWritten is summarized in Table 199.

**Table 199:** NVMeEnduranceGroupProperties.EndGrpLifetime.MediaUnitsWritten mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEndurance GroupProperties. EndGrpLifetime.M ediaUnitsWritten	"Media Units Written" in the Endurance Group Log. See 5.14.1.9
Type	Int64	
Description	The property contains the total number of data units written from this endurance group.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	The property shall	
	contain the total	
	number of data	
	units written from	
	this endurance	
	group. This value	
	includes host and	
	controller writes due	
	to internal	
	operations such as	
	garbage collection.	
	The value is	
	reported in billions,	
	where a value of 1	
	corresponds to 1	
	billion bytes written,	
	and is rounded up. A	
	value of zero	
	indicates the	
	property is	
	unsupported.	
Mandatory	Do Not Implement.	
Notes		Do not implement NVMeEn duranceGroupProperties as part of an NVM Set.

#### ${\bf 6.7.2.16\ NVMeEnduranceGroup Properties. End GrpLifetime. Host Read Command Count}$

The mapping for NVMeEnduranceGroupProperties.EndGrpLifetime.HostReadCommandCount is summarized in Table 200.

**Table 200:** 

 ${\tt NVMeEnduranceGroupProperties.EndGrpLifetime.\ HostReadCommandCount\ mapping}$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Notes		Do not implement NVMeEn duranceGroupProperties as part of an NVM Set.

### ${\bf 6.7.2.17\ NVMeEnduranceGroup Properties. End GrpLifetime. HostWriteCommandCount}$

The mapping for NVMeEnduranceGroupProperties.EndGrpLifetime.HostWriteCommandCount is summarized in Table 201.

**Table 201:** 

 ${\tt NVMeEnduranceGroupProperties.EndGrpLifetime.\ HostWriteCommandCount\ mapping}$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Property	N VMeEnduranceGrou pProperties.EndG rpLifetime.HostW riteCommandCount	"Host Write Commands" in the Endurance Group Log. See 5.14.1.9
Туре	Int64	
Description	This property contains the number of write commands completed by all controllers in the NVM subsystem for the Endurance Group.	
LongDescription	This property shall contain the number of write commands completed by all controllers in the NVM subsystem for the Endurance Group. For the NVM command set, the is the number of compare commands and write commands.	
Mandatory	Do Not Implement.	

	R edfish/Swordfish	NVMe / NVMe-oF
Notes		Do not implement NVMeEn duranceGroupProperties as part of an NVM Set.

#### ${\bf 6.7.2.18}\ \ NV Me Endurance Group Properties. End Grp Lifetime. Media And Data Integrity Error Count$

The mapping for NVMeEnduranceGroupProperties. EndGrpLifetime. MediaAndDataIntegrityErrorCount is summarized in Table 202.

**Table 202:** 

 ${\tt NVMeEnduranceGroupProperties.EndGrpLifetime.}\ Media And Data Integrity Error Count mapping$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEnduran ceGroupPropertie s.EndGrpLifetime .MediaAndDataInt egrityErrorCount	"Media and Data Integrity Errors" in the Endurance Group Log. See 5.14.1.9
Туре	Int64	
Description	This property contains the number of occurences where the controller detected an unrecovered data integrity error for the Endurance Group.	
	Group.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	contain the number	
	of occurences where	
	the controller	
	detected an	
	unrecovered data	
	integrity error for	
	the Endurance	
	Group. Errors such	
	as uncorrectable	
	ECC, CRC checksum	
	failure, or LBA tag	
	mismatch are	
	included in this field.	
Mandatory	Do Not Implement.	
Notes		Do not implement NVMeEn duranceGroupProperties as part of an NVM Set.

#### ${\bf 6.7.2.19\ NVMeEnduranceGroup Properties. End GrpLife time. Error Information Log Entry Count}$

The mapping for NVMeEnduranceGroupProperties. EndGrpLifetime. ErrorInformationLogEntryCount is summarized in Table 203.

**Table 203:** 

 ${\tt NVMeEnduranceGroupProperties.EndGrpLifetime.ErrorInformationLogEntryCount mapping}$ 

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeEndur anceGroupPropert ies.EndGrpLifeti me.ErrorInformat ionLogEntryCount	"Number of Error Information Log Entries" in the Endurance Group Log. See 5.14.1.9
Туре	Int64	
Description	This property contains the number of error information log entries over the life of the controller for the endurance group.	
LongDescription	This property shall contain the number of error information log entries over the life of the controller for the endurance group.	
Mandatory	Do Not Implement.	
Notes		Do not implement NVMeEn duranceGroupProperties as part of an NVM Set.

**6.7.2.20 NVMeSetProperties.SetIdentifier** The mapping for NVMeSetProperties.SetIdentifier is summarized in Table 204.

 Table 204:
 NVMeSetProperties. SetIdentifier

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSetProperti es.SetIdentifier	NVM Spec Property / Field: NVMSETID NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.5 Figure 253: NVM Set Attributes Entry
Type	String	NVM Spec Property Type: 16-bit value Additional NVM Spec Identifying Information: ByteOffset: 01:00
Description	A 16-bit hex value that contains the NVMe Set identifier.	
LongDescription	This property shall contain a 16-bit hex value that contains the NVMe Set identifier. The NVM Set identifier is unique within a subsystem. Reserved values include 0.	
Mandatory	Required	
Notes		Return as hex value as described in the Swordfish schema.

**6.7.2.21 NVMeSetProperties.OptimalWriteSizeBytes** The mapping for NVMeSet-Properties.OptimalWriteSizeBytes is summarized in Table 205.

 Table 205:
 NVMeSetProperties.OptimalWriteSizeBytes mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSet Properties.Optim alWriteSizeBytes	NVM Spec Property / Field: OptimalWriteSize NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	Int64	NVM Spec Property Type: Bytes Additional NVM Spec Identifying Information: ByteOffset: 15:12
Description	This property contains the Optimal Write Size in Bytes for this NVMe Set.	
LongDescription	This property shall contain the Optimal Write Size in Bytes for this NVMe Set.	
Mandatory	Required	
Notes		

**6.7.2.22 NVMeSetProperties.EnduranceGroupIdentifier** The mapping for NVMeSetProperties.EnduranceGroupIdentifier is summarized in Table 206.

Table 206: NVMeSetProperties.EnduranceGroupIdentifier mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSetPro perties.Enduranc eGroupIdentifier	NVM Spec Property / Field: En duranceGroupIdentifier NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.5 Figure 253: NVM Set Attributes Entry
Type	String	NVM Spec Property Type: 2 bytes Additional NVM Spec Identifying Information: ByteOffset: 03:02
Description	A 16-bit hex value that contains the endurance group identifier.	
LongDescription	This property shall contain a 16-bit hex value that contains the endurance group identifier. The endurance group identifier is unique within a subsystem. Reserved values include 0.	
Mandatory	Required	
Notes		

**6.7.2.23 NVMeSetProperties.Random4kReadTypicalNanoSeconds** The mapping for NVMeSetProperties.Random4kReadTypicalNanoSeconds is summarized in Table 207.

Table 207: NVMeSetProperties.Random4kReadTypicalNanoSeconds mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSetPropertie s.Random4kReadTy picalNanoSeconds	NVM Spec Property / Field: Random 4 KiB Read Typical NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Type	Int64	NVM Spec Property Type: 4 bytes Additional NVM Spec Identifying Information: ByteOffset: 11:08
Description	Indicates the typical time to complete a 4k read in 100 nano-second units when the NVM Set is in a Predictable Latency Mode Deterministic Window and there is 1 outstanding command per NVM Set.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	contain the typical	
	time to complete a	
	4k read in 100	
	nano-second units	
	when the NVM Set is	
	in a Predictable	
	Latency Mode	
	Deterministic	
	Window and there is	
	1 outstanding	
	command per NVM	
	Set.	
Mandatory	Required	
Notes		Convert from 100
		nanosecond units to
		nanosecond units.

**6.7.2.24 NVMeSetProperties.UnallocatedNVMNamespaceCapacityBytes** The mapping for NVMeSetProperties.UnallocatedNVMNamespaceCapacityBytes is summarized in Table 208.

**Table 208:** NVMeSetProperties.Random4kReadTypicalNanoSeconds mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	NVMeSe tProperties.Unal locatedNVMNamesp aceCapacityBytes	NVM Spec Property / Field: Random 4 KiB Read Typical NVM Spec: Section:Figure NVMe 1.4a: Section 5.15.2.5, Figure 253: NVM Set Attributes Entry
Туре	Int64	NVM Spec Property Type: 4 bytes Additional NVM Spec Identifying Information: ByteOffset: 47:32
Description	Indicates the unallocated capacity of the NVMe Set in bytes.	
LongDescription	This property shall contain the unallocated capacity of the NVMe Set in bytes.	
Mandatory	Required	
Notes		Convert from 100 nanosecond units to nanosecond units.

**6.7.2.25 Status.State** The mapping for Status. State is summarized in Table 209.

Table 209: Status. State mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.State	NVM Spec Property / Field: N/A
Туре	Resource.State (enum)	N/A
Description	The known state of the resource, such as, enabled.	

LongDescription This property shall indicate whether	
indicate whether	
maicate whether	
and why this	
component is	
available. Enabled	
indicates the	
resource is available.	
Disabled indicates	
the resource has	
been intentionally	
made unavailable	
but it can be	
enabled. Offline	
indicates the	
resource is	
unavailable	
intentionally and	
requires action to	
make it available.	
InTest indicates that	
the component is	
undergoing testing.	
Starting indicates	
that the resource is	
becoming available.	
Absent indicates the	
resource is	
physically	
unavailable.	
Mandatory Do not implem	nent

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values: Enabled / Disabled / StandbyOffline / StandbySpare / InTest / Starting / ABsent / Una vaialableOffline / Deferring / Quiesced / Updating / Qualified	There is not a clear mapping for State of an NVM Set. Do not implement this property.

**6.7.2.26 Status.Health** The mapping for Status.Health is summarized in Table 210.

Table 210: Status. Health mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.Health	NVM Spec Property / Field: N/A
Туре	Resource.Health	N/A
Description	The health state of this resource in the absence of its dependent resources.	
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
Mandatory		Do not implement.
Notes	Possible Values: OK / Warning / Critical	There is not a clear mapping for health of an NVM Set. Do not implement this property.

#### 6.8 Drive

The Redfish/Swordfish Drive schema represent the physical attributes of an NVMe drive object.

#### 6.8.1 Mockup

The following mockup shows a sample representation of the Volume schema used to represent an NVM Namespace.

```
"@odata.id": "/redfish/v1/Chassis/SimplestNVMeSSD/Drives/SimplestNVMeSSD",
"@odata.type": "#Drive.v1_9_0.Drive",
"IndicatorLED": "Lit",
"Model": "ST9146802SS",
"Revision": "S20A",
"Status": {
  "State": "Enabled",
  "Health": "OK"
"CapacityBytes": 899527000000,
"FailurePredicted": false,
"Protocol": "NVMe",
"MediaType": "SSD",
"Manufacturer": "Contoso",
"SerialNumber": "72D0A037FRD26",
"PartNumber": "SG0GP8811253178M02GJA00",
"Identifiers": [{
  "DurableNameFormat": "NAA",
  "DurableName": "500003942810D13A"
}],
"CapableSpeedGbs": 12,
"NegotiatedSpeedGbs": 12,
"Links": {
  "Volumes": [{
    "@odata.id": "/redfish/v1/Systems/Sys-
    → 1/Storage/SimplestNVMeSSD/Volumes/SimpleNamespace"
 }]
},
"Actions": {
  "#Drive.Reset": {
    "target": "/red-
    \hookrightarrow \quad \mathsf{fish/v1/Chassis/SimplestNVMeSSD/Drives/SimplestNVMeSSD/Actions/Drive.Reset"}
```

} } }

### 6.8.2 Property Mapping

**6.8.2.1 Actions.#Drive.Reset** The mapping for Actions.#Drive.Reset is summarized in Table 211.

Table 211: Actions. #Drive. Reset mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Acti ons.#Drive.Reset	NVM Spec Property / Field: Shutdown Notification (SHN) NVM Spec: Section:Figure Figure 78: Offset 14h, Bits 15:14
Туре	Action (Special form of POST)	
Description	This action resets this drive.	
LongDescription	This action shall reset this drive.	
Mandatory	Required for NVMe Drives	
Notes	This action has a mandatory property of "ResetType", which can be any of O n/ForceOff/Grace fulShutdown/Grac efulRestart/Nmi/ForceRestart/For ceOn/PushPowerButton/PowerCycle.	Usage: A normal NVM Subysystem shutdown maps to GracefulShutdown Subsystem Reset maps to ForceRestart; abrupt Subsystem Shutdown maps to ForceOff. If an implementation that supports the functionality, then they may implement PowerCycle.

**6.8.2.2 Actions.#Drive.SecureErase** The mapping for Actions. #Drive.SecureErase is summarized in Table 212.

Table 212: Actions.#Drive.SecureErase mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Actions.#D rive.SecureErase	NVM Spec Property / Field: NVM Spec: Section:Figure Section 5.24 Sanitize Command
Туре	Action (Special form of POST)	
Description	This action securely erases the contents of the drive.	
LongDescription	This action shall securely erase the drive.	TD
Mandatory	Yes	
Notes		Maps to sanitize. Implementation can support any variant.

# **6.8.2.3 Assembly.BinaryDataURI** The mapping for Assembly.BinaryDataURI is summarized in Table 213.

Table 213: Assembly.BinaryDataURI mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Assemb	NVMe-MI Spec Property /
	ly.BinaryDataURI	Field: Vital Product Data
		(VPD) <b>NVM Spec:</b>
		Section:Figure NVMe-MI:
		Section 9.2
Туре	String	

	R edfish/Swordfish	NVMe / NVMe-oF
Description	The URI at which to access an image of the assembly information.	
LongDescription	This property shall contain the URI at which to access an image of the assembly information, using the Redfish protocol and authentication methods. The Service provides this URI for the download of the OEM-specific binary image of the assembly data. An HTTP GET from this URI shall return a response payload of MIME time applicatio n/octet-stream. If the service supports it, an HTTP PUT to this URI shall replace the binary image of the assembly.	
Mandatory	Recommended	
Notes		Use to map binary blob via

**6.8.2.4 BlockSizeBytes** The mapping for BlockSizeBytes is summarized in Table 214.

Table 214: BlockSizeBytes mapping

	2 10 1 10 10 1	
	R edfish/Swordfish	NVMe / NVMe-oF
Property	BlockSizeBytes	NVM Spec Property / Field: Formatted LBA Size (FLBAS) NVM Spec: Section:Figure 247: byte 26
Туре	Int64	
Description	The size, in bytes, of the smallest addressable unit, or block.	
LongDescription	This property shall contain size of the smallest addressable unit of the associated drive.	
Mandatory	Required	
Notes		Follow index in 247: Byte 26 (bits 3:0) to the LBA format structure to get the metadata size and LBA data size combination. These combined values are BlockSizeBytes.

**6.8.2.5 CapableSpeedGpbs** The mapping for CapableSpeedGpbs is summarized in Table 215.

Table 215: CapableSpeedGpbs mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	CapableSpeedGpbs	NVM Spec Property / Field: PXCAP+Ch NVM Spec: Section:Figure 53
Туре	Decimal	
Description	The speed, in gigabit per second (Gbit/s), at which this drive can communicate to a storage controller in ideal conditions.	
LongDescription	This property shall contain fastest capable bus speed, in gigabit per second (Gbit/s), of the associated drive.	
Mandatory	Required	
Notes		For PCIe, this is in the PCIe link capabilities (PXCAP+Ch). Figure 53. For NVMe-oF this is not specified; use the value for the highest supported native capability.

**6.8.2.6 CapacityBytes** The mapping for CapacityBytes is summarized in Table 217.

For drives supporting only a single namespace (no or default endurance group / set only):

**Table 216:** CapacityBytes for single namespace mapping

int 64 Additional NVM Speldentifying Information: ByteOffset: 07:00, Identify Namespace data structure  Description  The size, in bytes, of the total size of the NVM allocated to this namespace.  LongDescription  This property shall contain the raw size, in bytes, of the namespace. The value is in associated drive.  The total size of the NVM allocated to this namespace. The value is in bytes, of the namespace. The value is in bytes. This field shall be supported if the Namespace Management capability (refer to NVMe Base Specification section 8.12) is supported. This field may not correspond to the logical block size multiplied by the Namespace Size field. Due		R edfish/Swordfish	NVMe / NVMe-oF
int 64 Additional NVM Speldentifying Information: ByteOffset: 07:00, Identify Namespace data structure  Description  The size, in bytes, of this drive.  The total size of the NVM allocated to this namespace.  LongDescription  This property shall contain the raw size, in bytes, of the nassociated drive.  In bytes, of the namespace. The value is in associated drive.  Supported if the Namespace Management capability (refer to NVMe Base Specification section 8.12) is supported. This field may not correspond to the logical block size multiplied by the Namespace Size field. Due to thin provisioning or othe settings (e.g., endurance), this field may be larger or smaller than the Namespace Size reported.	Property	CapacityBytes	Field: Namespace Size (NSZE) NVM Spec: Section:Figure NVMe 1.4a Section 5.15.2.1 (Identify
this drive.  allocated to this namespace.  LongDescription  This property shall contain the raw size, allocated to this namespace. The value is in bytes, of the namespace. The value is in bytes. This field shall be supported if the Namespace Management capability (refer to NVMe Base Specification section 8.12) is supported. This field may not correspond to the logical block size multiplied by the Namespace Size field. Due to thin provisioning or othe settings (e.g., endurance), this field may be larger or smaller than the Namespace Size reported.	Type	Int64	ByteOffset: 07:00, Identify
contain the raw size, in bytes, of the namespace. The value is in associated drive. bytes. This field shall be supported if the Namespace Management capability (refer to NVMe Base Specification section 8.12) is supported. This field may not correspond to the logical block size multiplied by the Namespace Size field. Due to thin provisioning or othe settings (e.g., endurance), this field may be larger or smaller than the Namespace Size reported.	Description		allocated to this
Mandatory Required No	LongDescription	contain the raw size, in bytes, of the	allocated to this namespace. The value is in bytes. This field shall be supported if the Namespace Management capability (refer to NVMe Base Specification section 8.12) is supported. This field may not correspond to the logical block size multiplied by the Namespace Size field. Due to thin provisioning or othe settings (e.g., endurance), this field may be larger or smaller than the
	Mandatory	Required	No

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Reporting capacity	Returned in bytes 63:48 of
	in bytes is the	the Identify Namespace
	Redfish and	Data Structure (NVM
	Swordfish standard	Command Set Specific).
	mechanism.	Reference NVMe Base
		Specification section in
		5.15.2.1 and figure 247.

For drives supporting multiple namespaces:

**Table 217:** CapacityBytes for single namespace mapping

Capacity. Just the "Total Endurance Group Capacity'			
Capacity. Just the "Total Endurance Group Capacity" in the Endurance Group Log See 5.14.1.9 + TP 4009  Type Int64  Description The number of bytes currently allocated by the storage system in this data store for this data type.  LongDescription The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.		R edfish/Swordfish	NVMe / NVMe-oF
Description  The number of bytes currently allocated by the storage system in this data store for this data type.  LongDescription  The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.	Property	CapacityBytes	Endurance Group Capacity' in the Endurance Group Log
currently allocated by the storage system in this data store for this data type.  LongDescription  The value shall be the number of bytes currently allocated by the storage system in this data store for this data type.	Туре	Int64	
the number of bytes currently allocated by the storage system in this data store for this data type.	Description	currently allocated by the storage system in this data store for this data	
Mandatory	LongDescription	the number of bytes currently allocated by the storage system in this data store for this data	
	Mandatory		

	R edfish/Swordfish	NVMe / NVMe-oF
Notes		Note: This is not in 1.4a because TP 4009 was not integrated.

### **6.8.2.7 Description** The mapping for Description is summarized in Table 218.

Table 218: Description mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Description	N/A
Туре	String	N/A
Description	The description of this resource.	N/A
LongDescription	This object represents the description of this resource. The resource values shall comply with the Redfish Specifi cation-described requirements.	N/A
Mandatory	Yes	N/A
Notes	In Redfish, Description is a read-only field.	

## **6.8.2.8 EncryptionAbility** The mapping for EncryptionAbility is summarized in Table 219.

Table 219: EncryptionAbility mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	E ncryptionAbility	N/A
Туре	Enum (En cryptionAbility)	
Description	The encryption ability of this drive.	
LongDescription	This property shall contain the encryption ability for the associated drive.	
Mandatory	Required	
Notes	Required when encryption is supported. Available values: None/SelfEncry ptingDrive/Other	Maps to vendor capabilities.

## **6.8.2.9 EncryptionStatus** The mapping for EncryptionStatus is summarized in Table 220.

Table 220: EncryptionStatus mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	EncryptionStatus	N/A
Туре	Drive. EncryptionStatus	
Description	The status of the encryption of this drive.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain the encryption status for the associated drive.	
Mandatory	DependsOn E ncryptionAbility != None	
Notes	Must be implemented and set when Encryption is enabled (E ncryptionAbility will indicate encryption capability type.) Possible values: Unlocked/locked/for eign/unencrypted	Set according to vendor specs / mapping.

**6.8.2.10 FailurePredicted** The mapping for FailurePredicted is summarized in Table 221.

Table 221: FailurePredicted mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	FailurePredicted	NVM Spec Property /
		Field: SmartHealthLog
		<b>NVM Spec: Section:Figure</b>
		196
Туре	Boolean	

	R edfish/Swordfish	NVMe / NVMe-oF
Description	An indication of whether this drive currently predicts a failure in the near future.	
LongDescription	This property shall indicate whether this drive currently predicts a manu facturer-defined failure.	
Mandatory	Required	
Notes	Implements the results of the SMART log data.	Trigger when the smart health errors indicate an issue (e.g.,): media and data integrity errors, and self-check.

### **6.8.2.11 Identifiers** The mapping for Identifiers is summarized in Table 222.

Table 222: Identifiers mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers	NVM Subsystem NVMe Qualified Name (SUBNQN)
Туре	Collection(Reso urce.Identifier)	An array of identifiers
Description	The Durable names for the subsystem.	An array of identifiers
LongDescription	This property shall contain a list of all known durable names for the associated subsystem.	This specifies the NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string. Refer to NVMe Base Specification, section 7.9, for the definition of NVMe Qualified Name. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).
Mandatory	Yes	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	This is an array of unique identifiers for the NVM Subsystem.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

**6.8.2.12 Identifiers.DurableNameFormat** The mapping for Identifiers.DurableNameFormat is summarized in Table 223.

Table 223: Identifiers. Durable Name Format mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identifiers.D urableNameFormat	NVM Subsystem NVMe Qualified Name (SUBNQN)
Type	Re source.v1_1_0.D urableNameFormat	There is a single value for this array in Subsystem. The property type is of type NVMe Qualified Name (NQN).
Description	The format of the Durable names for the subsystem.	NVM Subsystem NVMe Qualified Name (SUBNQN)
LongDescription	This specifies the format of the associated NVM Subsystem NVMe Qualified Name of type NQN. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).	
Mandatory	No	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	This is an enum with multiple potential values. For this particular usage in Subsystem, there will only be one instance populated, of type NQN.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

**6.8.2.13 Identifiers.DurableName** The mapping for Identifiers.DurableName is summarized in Table 224.

Table 224: Identifiers. Durable Name mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Identif iers.DurableName	NVM Subsystem NVMe Qualified Name (SUBNQN)
Type	Edm.String	The NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string
Description	The format of the Durable names for the subsystem.	NVM Subsystem NVMe Qualified Name (SUBNQN)
LongDescription	This specifies the NVM Subsystem NVMe Qualified Name as a UTF-8 null-terminated string. Refer to NVMe Base Specification, section 7.9, for the definition of NVMe Qualified Name. Support for this field is mandatory if the controller supports revision 1.2.1 or later as indicated in the Version register (refer to section 3.1.2).	
Mandatory	No	Yes

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	For this particular usage in Subsystem, there will only be one instance populated in the identifiers array.	There will only be one instance in this array for Subsystem. Refer to the Identify Controller data structure (CNS 01h) bits 1023:768 in figure 249 (Identify – Identify Controller Data Structure) of the NVMe Base Specification.

### **6.8.2.14 IndicatorLED** The mapping for IndicatorLED is summarized in Table 225.

Table 225: IndicatorLED mapping

dfish/Swordfish icatorLED	NVMe / NVMe-oF
icatorLED	N1 /A
	N/A
olean	N/A
indication of ether this drive rently predicts a ure in the near ure.	
s property shall icate whether s drive currently edicts a manu turer-defined	N/A
ure.	
	turer-defined lure.

	R edfish/Swordfish NV	Me / NVMe-oF
Notes	This property has	
	been deprecated.	
	See guidance /	
	implement the	
	Locatio	
	nIndicatorActive	
	property instead.	

**6.8.2.15 Links.Volumes** The mapping for Links.Volume is summarized in Table 226.

Table 226: Links.Volume mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Links.Volume	
Туре	Collectio n(Volume.Volume)	
Description	An array of links to the volumes that this drive either wholly or only partially contains.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain an array of links to resources of type Volume with which this drive is associated. This property shall include all volume resources of which this drive is a member and all volumes for which this drive acts as a spare if the hot spare	
Mandatory	type is Dedicated. Required	
Notes	This array shall contain links to all namespaces associated with this physical drive.	One way to do this would be get all of the controllers iterate through the list and get all of the namespace ids.

**6.8.2.16 Links.Volumes@odata.count** The mapping for Links.Volumes@odata.count is summarized in Table 227.

Table 227: Links.Volumes@odata.count mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Links.Volu mes@odata.count	
Туре	(odata property)int64	N/A

	R edfish/Swordfish	NVMe / NVMe-oF
Description	Count of the number of items in the Links.Volume array.	
LongDescription		
Mandatory	Required	
Notes		The number of namespaces is available from NVMe on a per controller basis.

### **6.8.2.17 Location** The mapping for Location is summarized in Table 228.

Table 228: Location mapping

	R edfish/Swordfish	NVMe / NVMe-oF
roperty	Location	N/A
ype	Collection(Re source.Location)	
escription	The location of the drive.	
ongDescription	This property shall contain location information of the associated drive.	N/A
andatory	Do Not Implement	
otes	This property has been deprecated. See guidance / implement the PhysicalLocation property instead.	

**6.8.2.18 LocationIndicatorActive** The mapping for LocationIndicatorActive is summarized in Table 229.

Table 229: LocationIndicatorActive mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Locatio nIndicatorActive	N/A
Туре	Boolean	N/A
Description	An indicator allowing an operator to physically locate this resource.	
LongDescription	This property shall contain the state of the indicator used to physically identify or locate this resource.  A write to this property shall update the value of IndicatorLED in this resource, if supported, to reflect the implementation of the locating function.	N/A
Mandatory	Recommended	
Notes	This property replaces the IndicatorLED, which has been deprecated.	Comes from vendor

**6.8.2.19 Manufacturer** The mapping for Manufacturer is summarized in Table 230.

Table 230: Manufacturer mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Manufacturer	NVM Spec Property / Field: NVM Spec: Section: Figure
Туре	String	
Description	The manufacturer of this drive.	
LongDescription	This property shall contain the name of the organization responsible for producing the drive. This organization might be the entity from whom the drive is purchased, but this is not necessarily true.	
Mandatory	Required	
Notes		End clients expect to see the name of the company (e.g.; Contoso, BestVendor) While the value may be filled from the IdentifyController PCI Vendor ID or SubsystemID field, it would be preferable to have this filled with the actual string value of the company name.

**6.8.2.20 MediaType** The mapping for MediaType is summarized in Table 231.

Table 231: MediaType mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	MediaType	N/A
Туре	enum (MediaType)	
Description	The type of media contained in this drive.	
LongDescription	This property shall contain the type of media contained in the associated drive.	N/A
Mandatory	Required	
Notes	Possible values: HDD/SSD/SMR.	NVMe SSD Drives to report SSD.

#### **6.8.2.21 Model** The mapping for Model is summarized in Table 232.

Table 232: Model mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Model	NVM Spec Property / Field: IdentifyController / Model Number (MN) NVM Spec: Section: Figure 249 byte 24:63
Туре	String	N/A
Description	The model number for the drive.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall contain the name by which the manufacturer generally refers to the drive.	N/A
Mandatory	Required	
Notes		

#### **6.8.2.22 Multipath** The mapping for Multipath is summarized in Table 233.

Table 233: Multipath mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Multipath	NVM Spec Property / Field: IdentifyNamespace: NMIC NVM Spec: Section:Figure 247: Byte 30, bit 0
Туре	Boolean	N/A
Description	An indication of whether the drive is accessible from multiple paths.	
LongDescription	This property shall indicate whether the drive is accessible by an initiator from multiple paths allowing for failover capabilities upon a path failure.	N/A

	R edfish/Swordfish NVMe / NVMe-o
Mandatory	Recommended to
	implement.
	Required property if
	drive is dual-ported.
Notes	

### **6.8.2.23 Name** The mapping for Name is summarized in Table 234.

Table 234: Name mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Name	NVM Spec Property / Field: Namespace ID (NSID NVM Spec: Section:Figure NVMe 1.4a
Туре	String	
Description	The name of the resource or array member.	N/A
LongDescription	This object represents the name of this resource or array member. The resource values shall comply with the Redfish Specifi cation-described requirements. This string value shall be of the 'Name' reserved word format.	
Mandatory	Yes	N/A

	R edfish/Swordfish NVMe / NVMe-oF
Notes	In Redfish, Name is a read-only field.

**6.8.2.24 NegotiatedSpeedGbps** The mapping for NegotiatedSpeedGbps is summarized in Table 235.

Table 235: NegotiatedSpeedGbps mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Neg otiatedSpeedGbps	NVM Spec Property / Field: N/A NVM Spec: Section:Figure N/A
Туре	Decimal	N/A
Description	The speed, in gigabit per second (Gbit/s), at which this drive currently communicates to the storage controller.	
LongDescription	This property shall contain current bus speed, in gigabit per second (Gbit/s), of the associated drive.	N/A
Mandatory	Required	
Notes		For PCIe, this is in the PCIe link capabilities (PXCAP+12h). Figure 55. For NVMe-oF this is not specified; use the value for the native capability.

**6.8.2.25 PhysicalLocation.Info** The mapping for PhysicalLocation. Info is summarized in Table 236.

Table 236: PhysicalLocation.Info mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Physi calLocation.Info	NVM Spec Property / Field: N/A NVM Spec: Section:Figure N/A
Туре	String	
Mandatory	Do Not Implement	
Notes	This property has been deprecated.	

**6.8.2.26 PhysicalLocation.InfoFormat** The mapping for PhysicalLocation.InfoFormat is summarized in Table 237.

Table 237: PhysicalLocation.InfoFormat mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	PhysicalLoc ation.InfoFormat	NVM Spec Property / Field: N/A NVM Spec: Section:Figure N/A
Туре	String	
Mandatory	Do Not Implement	
Notes	This property has been deprecated.	

**6.8.2.27 PhysicalLocation.PartLocation** The mapping for PhysicalLocation.PartLocation is summarized in Table 238.

 Table 238: PhysicalLocation.PartLocation mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	PhysicalLocat ion.PartLocation	NVM Spec Property / Field: N/A NVM Spec: Section:Figure N/A
Туре	Boolean	N/A
Description	An indication of whether the drive is accessible from multiple paths.	
LongDescription	This property shall indicate whether the drive is accessible by an initiator from multiple paths allowing for failover capabilities upon a path failure.	N/A
Mandatory	Recommended to implement. Required property if drive is dual-ported.	
Notes	The drive should support this property to be filled in by a layered process (e.g., BMC). Support for any other properties in PhysicalLocation are at the discretion of the vendor.	

**6.8.2.28 PredictedMediaLifetimeLeftPercent** The mapping for PredictedMediaLifetimeLeftPercent is summarized in Table 239.

**Table 239:** PredictedMediaLifetimeLeftPercent mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	P redictedMediaLif etimeLeftPercent	NVM Spec Property / Field: Get Log Page – SMART / Health Information Log NVM Spec: Section:Figure Figure 196: 05
Туре	Decimal	
Description	The percentage of reads and writes that are predicted to be available for the media.	
LongDescription	This property shall contain an indicator of the percentage of life remaining in the drive's media.	N/A
Mandatory	Required.	
Notes	Maps to percentage used in SMART information log	Calculate as 100 - value reported (PercentageUsed).

## **6.8.2.29 Protocol** The mapping for Protocol is summarized in Table 240.

Table 240: Protocol mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Protocol	

	R edfish/Swordfish	NVMe / NVMe-oF
Туре	P rotocol.Protocol	
Description	The protocol that this drive currently uses to communicate to the storage controller.	
LongDescription	This property shall contain the protocol that the associated drive currently uses to communicate to the storage controller for this system.	
Mandatory	Required.	
Notes	Possible values (long list)	NVMe Drives shall report "NVMe".

# **6.8.2.30 Revision** The mapping for Revision is summarized in Table 241.

Table 241: Revision mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Revision	NVM Spec Property /
		Field: IdentifyController:
		Firmare Revision (FR) <b>NVM</b>
		Spec: Section:Figure 249:
		71:64
Туре	String	

	R edfish/Swordfish	NVMe / NVMe-oF
Description	The revision of this drive. This is typically the firmware or hardware version of the drive.	
LongDescription	This property shall contain the manu facturer-defined revision for the associated drive.	
Mandatory	Required.	
Notes		Return the currently active firmware revision information.

**6.8.2.31 RotationSpeedRPM** The mapping for RotationSpeedRPM is summarized in Table 242.

Table 242: RotationSpeedRPM mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	RotationSpeedRPM	
Туре	Decimal	
Description	An indication of whether the drive is accessible from multiple paths.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall indicate whether the drive is accessible by an initiator from multiple paths allowing for failover capabilities upon a path failure.	
Mandatory	DependsOn MediaType value. If MediaType == SSD, (not required to) do not implement.	
Notes	Future proofing - will be a relevant property for NVMe HDDs.	

# **6.8.2.32 SKU** The mapping for SKU is summarized in Table 243.

Table 243: SKU mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	SKU	N/A
Туре	String	
Description	The SKU for this drive.	
LongDescription	This property shall contain the stock-keeping unit (SKU) number for this drive.	
Mandatory	Required.	

	R edfish/Swordfish NVMe / NVMe-oF
Notes	The drive should
	support this
	property to be filled
	in by a layered
	process (e.g., OEM
	manufacturing).

**6.8.2.33 SerialNumber** The mapping for SerialNumber is summarized in Table 244.

Table 244: SerialNumber mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	SerialNumber	NVM Spec Property / Field: IdentifyController / SerialNumber (SN) NVM Spec: Section: Figure 249 byte 04:23
Туре	String	
Description	The serial number for this drive.	
LongDescription	This property shall contain the manufa cturer-allocated number that identifies the drive.	
Mandatory	Required.	
Notes		

**6.8.2.34 Status.State** The mapping for Status.state is summarized in Table 245.

Table 245: Status. State mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.State	Enable (EN)
Туре	Resource.State (enum)	
Description	The known state of the resource, such as, enabled.	

	R edfish/Swordfish	NVMe / NVMe-oF
LongDescription	This property shall	
	indicate whether	
	and why this	
	component is	
	available. Enabled	
	indicates the	
	resource is available.	
	Disabled indicates	
	the resource has	
	been intentionally	
	made unavailable	
	but can be enabled.	
	Offline indicates the	
	resource is	
	unavailable	
	intentionally and	
	requires action to	
	make it available.	
	InTest indicates that	
	the component is	
	undergoing testing.	
	Starting indicates	
	that the resource is	
	becoming available.	
	Absent indicates the	
	resource is	
	physically	
	unavailable.	
Mandatory	Required (for NVM	
	Drives)	

	R edfish/Swordfish	NVMe / NVMe-oF
Notes	Possible values: Enabled / Disabled / StandbyOffline / StandbySpare / InTest / Starting / Absent / Un availableOffline / Deferring / Quiesced / Updating / Qualified	The drive should support this property to be filled in by a higher level client (e.g. BMC). The drive can self-set this drive to Enabled / Disabled / InTest /Updating If any controller in the drive is set to Enabled, set to "Enabled". If all controllers are set to disabled, set to "Disabled". If a firmware update is in progress, set to "Updating". If the drive is running a self-test, set to "InTest".

**6.8.2.35 Status.Health** The mapping for Status.Health is summarized in Table 246.

Table 246: Status. Health mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	Status.Health	NVM Spec Property /
		Field: CSTS – Controller
		Status <b>NVM Spec:</b>
		Section:Figure NVMe 1.4a:
		Section 3.1.6, Figure 79
		NVM Spec Property /
		Field: Critical Warning NVM
		Spec: Section:Figure
		NVMe 1.4a: Section 5.14.1.2,
		SMART / Health
		Information, Figure 196
Туре	Resource.Health	

	R edfish/Swordfish	NVMe / NVMe-oF
Description	The health state of this resource in the absence of its dependent resources.	
LongDescription	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.	
Mandatory	Required for NVM Drives.	
Notes	Possible Values: OK / Warning / Critical	Report to same value as set for worst-case controller Status.Health.

**6.8.2.36 StatusIndicator** The mapping for StatusIndicator is summarized in Table 247.

Table 247: StatusIndicator mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	StatusIndicator	N/A
Туре	enum ( StatusIndicator)	

	R edfish/Swordfish	NVMe / NVMe-oF
Description	An indication of whether the drive is accessible from multiple paths.	
LongDescription	This property shall indicate whether the drive is accessible by an initiator from multiple paths allowing for failover capabilities upon a path failure.	
Mandatory	Required.	
Notes	Multiple values possible. Relevant values for NVMe standalone drives: OK, Fail, Predictive FailureAnalysis.	The drive should support this property to be filled in by a higher level client (e.g., BMC). The drive can self-set this drive only to OK (or potentially fail, but only if the property has not been set by higher-level software).

**6.8.2.37 WriteCacheEnabled** The mapping for WriteCacheEnabled is summarized in Table 248.

Table 248: WriteCacheEnabled mapping

	R edfish/Swordfish	NVMe / NVMe-oF
Property	SerialNumber	NVM Spec Property /
		Field: Volatile Write Cache
		Enable (WCE) NVM Spec:
		Section:Figure 283: 00

	R edfish/Swordfish	NVMe / NVMe-oF
Туре	Boolean	
Description	An indication of whether the drive write cache is enabled.	
LongDescription	This property shall indicate whether the drive write cache is enabled.	
Mandatory	Required (for NVMe Drives).	
Notes		Bits 00 of WCE indicate whether the WCE is enabled or disabled.

## 7 Other Feature Mapping

### 7.1 Introduction

There are additional features and functionality that are also desirable to be exposed via the Redfish/Swordfish management ecosystems; however, there is not necessarily a clear mapping for these to a specific portion of the NVMe specification, or the functionality has a large component provided by the NVMe device implementer. This section provides an overview of the required functionality and presentation required to present a common, standardized interface to the Redfish/Swordfish clients.

### 7.2 Firmware Update

Firmware update is a required function to present comprehensive management. This is presented in Redfish through the "Update" service. The Update Service provides a standardized interface to all software and firmware update mechanisms throughout the server, storage, and networking environment, and as such, provides an abstracted, standardized interface that largely manages the acquisition from the client of the image files (and subsequent distribution of those to the designated targets), as well as very coarse-grained scheduling.

Note that this mechanism does not include any "active image" management capability (e.g., rollback).

### 7.2.1 Firmware update for NVMe Drives

NVMe drives shall support a standard implementation of the Redfish Update service. This is fundamentally a single-step invocation process on the update service that gets the image file from a specified URI using the SimpleUpdate action.

One parameter that shall be specified is the OperationApplyTime; this indicates when to apply the image. If not explicitly specified, the implementation should assume the request is to be applied immediately.

The values of the OperationApplyTime that shall be supported by NVMe drives are: - Immediate - OnReset

Example simple update request:

POST /redfish/v1/UpdateService/Actions/UpdateService.SimpleUpdate HTTP/1.1

```
Content-Type: application/json
Content-Length: <computed-length>
{
    "ImageURI": "https://192.168.1.250/images/dev1_update.bin"
    "@Redfish.OperationApplyTime": "OnReset"
}
```

The following additional parameters may be required to access the image. Implementations should support these:

 $Username \mid String \mid The user name to access the URI specified by the ImageURI parameter. \mid$ 

 ${\tt Password} \,|\, {\tt String} \,|\, {\tt The} \,password \,to \,access \,the \, {\tt URI} \,specified \,by \,the \, {\tt ImageURI} \,parameter. \,$ 

Additionally, the implementation may support the Targets parameter to specify the list of devices on which to apply the image. If Targets is not specified, the image will be applied to all applicable devices.

Targets | Array | An array of strings that are URIs to resources that indicate where to apply the image. |

The SimpleUpdate mechanism is fundamentally a "pull" mechanism (the implementation pulls a file from a target); the UpdateService also supports a "push" mechanism (the client "pushes" the image to the implementation as part of the request payload) that may also be implemented. For more information this mechanism, using the MultipartHttpPushUri property, is documented in the Redfish Specification.

**7.2.1.1 Mapping Images to NVMe Capabilities** It will be up to the implementation to determine the NVMe specific parameters to use upon receipt of the image from the update service. However, the following general guidelines should be used to ensure behavioral consistency across implementations:

When receiving image: - If open slots, the implementation can choose what open slot to use, and load the image to that slot. - If all slots are full, the implementation can choose (typically any slot except the currently active image).

After loaded to a slot, the implementation will mark the image as active. Based on the "apply time" setting, the implementation setting will activate the image either immediately, or set to activate on (the next) reset.

# Annex A: Objects without a direct mapping to the NVMe model

#### A.1: Overview

There are a number of objects that are required for the proper integration of NVMe support within Redfish and Swordfish, but which are not supported by an entity that can be mapped directly from the various NVM Specifications. Information about these related but un-mapped objects are defined elsewhere in the documentation provided with each Swordfish release.

They are summarized in Table A.1 for ease of use, including:

- Object Name
- NVMe Device Expected Usage

Object	NVMe Device Expected Usage	
NetworkAdapter	NVMe-oF Subysystems, Network-Attach Drives	
Port	NVMe-oF Subysystems, Network-Attach Drives	
NetworkDeviceFunction	NVMe-oF Subysystems, Network-Attach Drives	

## Table A.1: Related Objects

Required usage of objects and their properties are contained in the relevant Swordfish profiles.

For example, for Ethernet-Attach drives, the NetworkAdapter, Port, and NetworkDeviceFunction required properties are specified as part of the "Ethernet-Attach NVMe Drive" profile.

## A.2: Related Use Cases

The Swordfish Scalable Storage Management API User's Guide contains real-world examples of how clients will interact with an implementation. Table A.2 summarizes the NVMe use cases as of 14 June 2021.

Title	Description	
Attach a Namespace	Attach a Namespace	
Deprovision a Namespace	Deprovision a Namespace	
Detach a Namespace	Detach a Namespace	
Provision a Namespace	Provision a Namespace	
Provision an NVMSet with a Namespace	Provision an NVMet assocaited with a Namespace	
Report capacity for a Namespace	Report capacity for a Namespace	
Report remaining life for a Namespace	Report remaining life for a Namespace	

Table A.2: NVMe Use Case Summary

# **Annex B: Bibliography**

### **B.1** Overview

The following referenced documents provide important support for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

## **B.2** Informational references

The informational references are summarized in Table B.1.

Tag	Title (Version)	Author	URL
Pro files	Swordfish Profile Bundle Working Draft	SNIA	<a href="https://www.sni">https://www.sni</a> a.org/forums/smi/swordfish>
Users Guide	wordfish Scalable Storage Management API User's Guide	SNIA	<a href="https://www.sni">https://www.sni</a> a.org/forums/smi/swordfish>

Table B.1: Informational References