



# Swordfish Scalable Storage Management API Specification

Version: 1.2.4a

**Abstract:** The Swordfish Scalable Storage Management API defines a RESTful interface and a standardized data model to provide a scalable, customer-centric interface for managing storage and related data services.

## SNIA Standard

*This document has been released and approved by the SNIA. The SNIA believes that the ideas, methodologies, and technologies described in this document accurately represent the SNIA goals and are appropriate for widespread distribution. Suggestion for revision should be directed to <http://www.snia.org/feedback/>.*

*Last Updated: 12 July 2022*

## Contents

USAGE . . . . .	12
DISCLAIMER . . . . .	13
Current Revision . . . . .	13
Contact SNIA . . . . .	13
FEEDBACK AND INTERPRETATIONS . . . . .	13
INTENDED AUDIENCE . . . . .	14
VERSIONING POLICY . . . . .	14
Revision History . . . . .	14
About SNIA . . . . .	20
Acknowledgements . . . . .	20
<b>1 Abstract</b>	<b>23</b>
<b>2 Scope</b>	<b>24</b>
2.1 Document Goals . . . . .	24
2.2 Audience Assumptions . . . . .	25
<b>3 Normative References</b>	<b>26</b>
3.1 Overview . . . . .	26
3.2 Approved references . . . . .	26
3.3 References under development . . . . .	28
3.4 Other references . . . . .	28
<b>4 Terms and Definitions</b>	<b>29</b>
4.1 Overview . . . . .	29
4.2 Swordfish-specific Terms . . . . .	29
4.2.1 Definitions . . . . .	29
4.2.2 Symbols and abbreviated terms . . . . .	30
4.3 Reference to Redfish terms . . . . .	30
4.4 Keywords (normative language terms) . . . . .	30
<b>5 Swordfish Overview</b>	<b>32</b>
5.1 Introduction . . . . .	32
5.2 Relation to Redfish . . . . .	32
5.3 Storage System Models . . . . .	33
5.4 The ServiceRoot and ServiceContainer entities . . . . .	37
5.4.1 Overview . . . . .	37
5.4.2 The Storage resource collection . . . . .	37

5.4.3	The Systems resource collection . . . . .	38
5.4.4	The Chassis resource collection . . . . .	38
5.4.5	The StorageSystems resource collection . . . . .	38
5.5	Swordfish model overview . . . . .	39
5.5.1	The Storage resource . . . . .	39
5.5.2	The StorageController resource . . . . .	40
5.5.3	The Endpoint resource . . . . .	40
5.5.4	The Endpoint Collection resource . . . . .	40
5.5.5	The ConsistencyGroup resource . . . . .	40
5.5.6	The ConsistencyGroup Collection resource . . . . .	40
5.5.7	The StorageGroup resource . . . . .	40
5.5.8	The StoragePool resource . . . . .	41
5.5.9	The Volume resource . . . . .	41
5.5.10	The FileSystem resource . . . . .	42
<b>6</b>	<b>Features and Profiles</b>	<b>43</b>
6.1	Overview . . . . .	43
6.2	Requirement for SupportedFeatures . . . . .	43
6.3	EnergyStar for Storage Feature . . . . .	44
6.4	Class of Service Feature . . . . .	44
6.4.1	Overview . . . . .	44
6.4.2	Class of Service Model . . . . .	44
6.4.3	ServiceRoot Additions . . . . .	49
6.4.4	The StorageService resource . . . . .	49
<b>7</b>	<b>Schema Considerations</b>	<b>53</b>
7.1	Schema Introduction . . . . .	53
7.1.1	Overview . . . . .	53
7.1.2	Swordfish Extension of the Redfish ServiceRoot . . . . .	53
7.2	Default values and NULLABLE attributes . . . . .	53
7.3	Common schema annotations . . . . .	54
7.4	Property implementation requirements . . . . .	56
7.5	Schema repository . . . . .	56
7.6	Referencing other schemas . . . . .	56
<b>8</b>	<b>Implementation requirements</b>	<b>57</b>
8.1	Security . . . . .	57
8.2	General constraints . . . . .	57
8.2.1	Redfish elements . . . . .	57

8.2.2	Storage Events . . . . .	57
8.3	Discovering Swordfish resources . . . . .	58
8.4	ClassOfService requirements . . . . .	59
8.5	StorageSystems requirements . . . . .	59
8.6	Entity Sets . . . . .	60
8.7	Addressing entities within a collection . . . . .	60
8.8	Addressing members of a ResourceCollection . . . . .	60
8.9	HTTP status codes . . . . .	61
8.9.1	Overview . . . . .	61
8.9.2	Create . . . . .	61
8.9.3	Update, Replace, Delete . . . . .	62
8.9.4	Actions . . . . .	63
<b>9</b>	<b>Swordfish type definitions</b>	<b>65</b>
9.1	Overview . . . . .	65
9.2	Introduction . . . . .	65
9.3	Universal properties . . . . .	65
9.4	Frequently used properties . . . . .	66
9.5	Common Swordfish Objects . . . . .	68
9.5.1	Capacity . . . . .	68
9.5.2	CapacityInfo . . . . .	69
9.5.3	Identifier . . . . .	70
9.5.4	IOStatistics . . . . .	72
9.5.5	IOWorkload . . . . .	75
9.5.6	IOWorkloadComponent . . . . .	76
9.5.7	Location . . . . .	78
9.5.8	Oem . . . . .	94
9.5.9	ReplicaInfo . . . . .	94
9.5.10	ReplicaRequest . . . . .	110
9.5.11	Schedule . . . . .	111
9.5.12	Status . . . . .	115
9.6	Swordfish Schema Types . . . . .	120
9.6.1	CapacitySource 1.2.0 . . . . .	120
9.6.2	CapacitySourceCollection . . . . .	124
9.6.3	ClassOfService 1.2.0 . . . . .	126
9.6.4	ClassOfServiceCollection . . . . .	129
9.6.5	ConsistencyGroup 1.1.0 . . . . .	131
9.6.6	ConsistencyGroupCollection . . . . .	141
9.6.7	DataProtectionLineOfService 1.3.0 . . . . .	142

9.6.8	DataProtectionLoSCapabilities 1.2.0 . . . . .	148
9.6.9	DataSecurityLineOfService 1.1.1 . . . . .	154
9.6.10	DataSecurityLoSCapabilities 1.2.0 . . . . .	161
9.6.11	DataStorageLineOfService 1.3.1 . . . . .	169
9.6.12	DataStorageLoSCapabilities 1.2.2 . . . . .	173
9.6.13	FeaturesRegistry 1.1.1 . . . . .	178
9.6.14	FileShare 1.2.0 . . . . .	180
9.6.15	FileShareCollection . . . . .	188
9.6.16	FileSystem 1.2.2 . . . . .	189
9.6.17	FileSystemCollection . . . . .	198
9.6.18	HostedStorageServices . . . . .	200
9.6.19	IOConnectivityLineOfService 1.2.1 . . . . .	201
9.6.20	IOConnectivityLoSCapabilities 1.2.0 . . . . .	207
9.6.21	IOPerformanceLineOfService 1.1.1 . . . . .	212
9.6.22	IOPerformanceLoSCapabilities 1.3.0 . . . . .	215
9.6.23	LineOfService 1.1.0 . . . . .	218
9.6.24	LineOfServiceCollection . . . . .	219
9.6.25	NVMeDomain 1.1.0 . . . . .	221
9.6.26	NVMeDomainCollection . . . . .	224
9.6.27	NVMeFirmwareImage 1.1.0 . . . . .	225
9.6.28	SpareResourceSet 1.0.1 . . . . .	227
9.6.29	StorageGroup 1.5.0 . . . . .	231
9.6.30	StorageGroupCollection . . . . .	243
9.6.31	StoragePool 1.7.1 . . . . .	244
9.6.32	StoragePoolCollection . . . . .	268
9.6.33	StorageReplicaInfo 1.4.0 . . . . .	269
9.6.34	StorageService 1.5.0 . . . . .	270
9.6.35	StorageServiceCollection . . . . .	282
9.6.36	StorageSystemCollection . . . . .	283
9.6.37	Volume 1.8.0 . . . . .	285
9.6.38	VolumeCollection . . . . .	321

## **Annex A: Bibliography 324**

A.1 Overview . . . . .	324
A.2 Informational references . . . . .	324

## List of Tables

1	Revision history . . . . .	15
2	Contributors . . . . .	21
3	Approved normative references . . . . .	26
4	References under development . . . . .	28
5	Swordfish terms . . . . .	29
6	Redfish terms . . . . .	30
7	Normative language terms . . . . .	31
8	Default and Nullable Interaction . . . . .	54
9	Schema annotations . . . . .	54
10	Universal properties . . . . .	65
11	Frequent properties . . . . .	67
12	Capacity properties . . . . .	68
13	CapacityInfo properties . . . . .	69
14	Identifier properties . . . . .	70
15	DurableNameFormat property values . . . . .	71
16	IOStatistics properties . . . . .	72
17	IOWorkload properties . . . . .	75
18	IOWorkloadComponent properties . . . . .	76
19	IOAccessPattern property values . . . . .	78
20	Location properties . . . . .	78
21	LocationType property values ##### Orientation: . . . . .	92
22	Orientation property values ##### RackOffsetUnits: . . . . .	92
23	RackOffsetUnits property values ##### Reference: . . . . .	93
24	Reference property values . . . . .	93
25	Oem properties . . . . .	94
26	ReplicaInfo properties . . . . .	94
27	ConsistencyState property values ##### ConsistencyStatus: . . . . .	100
28	ConsistencyStatus property values ##### ConsistencyType: . . . . .	100
29	ConsistencyType property values ##### ReplicaFaultDomain: . . . . .	101
30	ReplicaFaultDomain property values ##### ReplicaPriority: . . . . .	101
31	ReplicaPriority property values ##### ReplicaProgressStatus: . . . . .	102
32	ReplicaProgressStatus property values ##### ReplicaReadOnlyAccess: . . . . .	102
33	ReplicaReadOnlyAccess property values ##### ReplicaRecoveryMode: . . . . .	104
34	ReplicaRecoveryMode property values ##### ReplicaRole: . . . . .	104
35	ReplicaRole property values ##### ReplicaState: . . . . .	105
36	ReplicaState property values ##### ReplicaType: . . . . .	105

37	ReplicaType property values ##### ReplicaUpdateMode: . . . . .	107
38	ReplicaUpdateMode property values ##### RequestedReplicaState: .	107
39	RequestedReplicaState property values ##### UndiscoveredElement: .	108
40	UndiscoveredElement property values . . . . .	110
41	ReplicaRequest properties . . . . .	110
42	Schedule properties . . . . .	111
43	EnabledDaysOfWeek property values ##### EnabledMonthsOfYear: .	114
44	EnabledMonthsOfYear property values . . . . .	114
45	Status properties . . . . .	115
46	Health property values ##### HealthRollup: . . . . .	118
47	HealthRollup property values ##### Severity: . . . . .	119
48	Severity property values ##### State: . . . . .	119
49	State property values . . . . .	119
50	CapacitySource 1.2.0 properties . . . . .	121
51	CapacitySourceCollection properties . . . . .	125
52	ClassOfService 1.2.0 properties . . . . .	126
53	ClassOfServiceCollection properties . . . . .	130
54	ConsistencyGroup 1.1.0 properties . . . . .	131
55	ConsistencyMethod property values ##### ConsistencyType: . . . . .	139
56	ConsistencyType property values ##### ReplicaType: . . . . .	140
57	ReplicaType property values ##### ReplicaUpdateMode: . . . . .	140
58	ReplicaUpdateMode property values . . . . .	140
59	ConsistencyGroupCollection properties . . . . .	141
60	DataProtectionLineOfService 1.3.0 properties . . . . .	143
61	RecoveryGeographicObjective property values ##### Recovery- TimeObjective: . . . . .	147
62	RecoveryTimeObjective property values ##### ReplicaType: . . . . .	147
63	ReplicaType property values . . . . .	148
64	DataProtectionLoSCapabilities 1.2.0 properties . . . . .	149
65	SupportedRecoveryGeographicObjectives property values ##### Sup- portedRecoveryTimeObjectives: . . . . .	152
66	SupportedRecoveryTimeObjectives property values ##### Supporte- dReplicaTypes: . . . . .	153
67	SupportedReplicaTypes property values . . . . .	154
68	DataSecurityLineOfService 1.1.1 properties . . . . .	155
69	AntivirusScanPolicies property values ##### ChannelEncryption- Strength: . . . . .	158

70	ChannelEncryptionStrength property values ##### DataSanitization-Policy: . . . . .	158
71	DataSanitizationPolicy property values ##### HostAuthenticationType:	158
72	HostAuthenticationType property values ##### MediaEncryption-Strength: . . . . .	159
73	MediaEncryptionStrength property values ##### SecureChannelPro- tocol: . . . . .	160
74	SecureChannelProtocol property values ##### UserAuthenticationType:	160
75	UserAuthenticationType property values . . . . .	160
76	DataSecurityLoSCapabilities 1.2.0 properties . . . . .	162
77	SupportedAntivirusScanPolicies property values ##### Supported- ChannelEncryptionStrengths: . . . . .	165
78	SupportedChannelEncryptionStrengths property values ##### Sup- portedDataSanitizationPolicies: . . . . .	166
79	SupportedDataSanitizationPolicies property values ##### Supported- HostAuthenticationTypes: . . . . .	166
80	SupportedHostAuthenticationTypes property values ##### Support- edMediaEncryptionStrengths: . . . . .	167
81	SupportedMediaEncryptionStrengths property values ##### Support- edSecureChannelProtocols: . . . . .	168
82	SupportedSecureChannelProtocols property values ##### Supporte- dUserAuthenticationTypes: . . . . .	168
83	SupportedUserAuthenticationTypes property values . . . . .	169
84	DataStorageLineOfService 1.3.1 properties . . . . .	170
85	AccessCapabilities property values ##### ProvisioningPolicy: . . . .	172
86	ProvisioningPolicy property values ##### RecoveryTimeObjectives: .	172
87	RecoveryTimeObjectives property values . . . . .	173
88	DataStorageLoSCapabilities 1.2.2 properties . . . . .	174
89	SupportedAccessCapabilities property values ##### SupportedProvi- sioningPolicies: . . . . .	177
90	SupportedProvisioningPolicies property values ##### Supporte- dRecoveryTimeObjectives: . . . . .	177
91	SupportedRecoveryTimeObjectives property values . . . . .	178
92	FeaturesRegistry 1.1.1 properties . . . . .	178
93	FileShare 1.2.0 properties . . . . .	181
94	DefaultAccessCapabilities property values ##### FileShareQuotaType:	186
95	FileShareQuotaType property values ##### FileSharingProtocols: . . .	186
96	FileSharingProtocols property values ##### WritePolicy: . . . . .	187



97	WritePolicy property values . . . . .	187
98	FileShareCollection properties . . . . .	188
99	FileSystem 1.2.2 properties . . . . .	190
100	AccessCapabilities property values ##### CharacterCodeSet: . . . . .	197
101	CharacterCodeSet property values . . . . .	198
102	FileSystemCollection properties . . . . .	199
103	HostedStorageServices properties . . . . .	200
104	IOConnectivityLineOfService 1.2.1 properties . . . . .	202
105	AccessProtocols property values . . . . .	204
106	IOConnectivityLoSCapabilities 1.2.0 properties . . . . .	207
107	SupportedAccessProtocols property values . . . . .	209
108	IOPerformanceLineOfService 1.1.1 properties . . . . .	213
109	IOPerformanceLoSCapabilities 1.3.0 properties . . . . .	215
110	LineOfService 1.1.0 properties . . . . .	218
111	LineOfServiceCollection properties . . . . .	220
112	NVMeDomain 1.1.0 properties . . . . .	221
113	NVMeDomainCollection properties . . . . .	224
114	NVMeFirmwareImage 1.1.0 properties . . . . .	226
115	NVMeDeviceType property values . . . . .	227
116	SpareResourceSet 1.0.1 properties . . . . .	228
117	StorageGroup 1.5.0 properties . . . . .	231
118	AccessCapability property values ##### AccessState: . . . . .	241
119	AccessState property values ##### AuthenticationMethod: . . . . .	242
120	AuthenticationMethod property values . . . . .	242
121	StorageGroupCollection properties . . . . .	243
122	StoragePool 1.7.1 properties . . . . .	245
123	NVMePoolType property values ##### PoolType: . . . . .	263
124	PoolType property values ##### SupportedPoolTypes: . . . . .	263
125	SupportedPoolTypes property values ##### SupportedProvisioning- Policies: . . . . .	264
126	SupportedProvisioningPolicies property values ##### SupportedRAID- Types: . . . . .	264
127	SupportedRAIDTypes property values . . . . .	265
128	StoragePoolCollection properties . . . . .	268
129	StorageReplicaInfo 1.4.0 properties . . . . .	270
130	StorageService 1.5.0 properties . . . . .	271
132	StorageServiceCollection properties . . . . .	282
133	StorageSystemCollection properties . . . . .	284

134	Volume 1.8.0 properties . . . . .	286
135	AccessCapabilities property values ##### EncryptionTypes: . . . . .	311
136	EncryptionTypes property values ##### InitializeMethod: . . . . .	312
137	InitializeMethod property values ##### InitializeType: . . . . .	312
138	InitializeType property values ##### LBAFormatsSupported: . . . . .	313
139	LBAFormatsSupported property values ##### ProvisioningPolicy: . . . . .	313
140	ProvisioningPolicy property values ##### RAIDType: . . . . .	314
141	RAIDType property values ##### ReadCachePolicy: . . . . .	314
142	ReadCachePolicy property values ##### ReplicaType: . . . . .	317
143	ReplicaType property values ##### ReplicaUpdateMode: . . . . .	318
144	ReplicaUpdateMode property values ##### VolumeType: . . . . .	318
145	VolumeType property values ##### VolumeUsage: . . . . .	319
146	VolumeUsage property values ##### WriteCachePolicy: . . . . .	319
147	WriteCachePolicy property values ##### WriteCacheState: . . . . .	320
148	WriteCacheState property values ##### WriteHoleProtectionPolicy: . . . . .	320
149	WriteHoleProtectionPolicy property values . . . . .	321
150	VolumeCollection properties . . . . .	322

**List of Figures**

1 Model Overview . . . . . 32

2 Logical Subsystem in Swordfish Standalone Configuration . . . . . 34

3 Swordfish Standalone Configuration Example . . . . . 35

4 Logical Subsystem in Swordfish Integrated Configuration . . . . . 36

5 Swordfish Integrated Configuration Example . . . . . 37

6 Logical Subsystem in Integrated Service Configuration . . . . . 45

7 Integrated Service Configuration Example . . . . . 46

8 Logical Subsystem in Standalone Service Configuration . . . . . 47

9 Standalone Service Configuration Example . . . . . 48

## USAGE

Copyright (c) 2016 - 2022 SNIA. All rights reserved. All other trademarks or registered trademarks are the property of their respective owners.

The SNIA hereby grants permission for individuals to use this document for personal use only, and for corporations and other business entities to use this document for internal use only (including internal copying, distribution, and display) provided that:

1. Any text, diagram, chart, table or definition reproduced must be reproduced in its entirety with no alteration, and,
2. Any document, printed or electronic, in which material from this document (or any portion hereof) is reproduced must acknowledge the SNIA copyright on that material, and must credit the SNIA for granting permission for its reuse.

Other than as explicitly provided above, you may not make any commercial use of this document, or any portion thereof, or distribute this document to third parties. All rights not explicitly granted are expressly reserved to SNIA.

Permission to use this document for purposes other than those enumerated above may be requested by emailing [tcmd@snia.org](mailto:tcmd@snia.org). Please include the identity of the requesting individual and/or company and a brief description of the purpose, nature, and scope of the requested use.

All code fragments, scripts, data tables, and sample code in this SNIA document are made available under the following license:

BSD 3-Clause Software License

Copyright (c) 2022, The Storage Networking Industry Association.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of The Storage Networking Industry Association (SNIA) nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS “AS IS” AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## **DISCLAIMER**

The information contained in this publication is subject to change without notice. The SNIA makes no warranty of any kind with regard to this publication, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The SNIA shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use.

Suggestions for revisions should be directed to <http://www.snia.org/feedback/>.

## **Current Revision**

SNIA is actively engaged in expanding and refining the Swordfish documentation. The most current revision can be found on the SNIA web site at [https://www.snia.org/tech\\_activities/standards/curr\\_standards/swordfish](https://www.snia.org/tech_activities/standards/curr_standards/swordfish).

## **Contact SNIA**

Current SNIA practice is to make updates and other information available through their web site at <http://www.snia.org>.

## **FEEDBACK AND INTERPRETATIONS**

Requests for interpretation, suggestions for improvement and addenda, or defect reports are welcome. They should be sent via the SNIA Feedback Portal at

<http://www.snia.org/feedback/> or by mail to the Storage Networking Industry Association, 4360 ArrowsWest Drive, Colorado Springs, Colorado 80907, U.S.A.

## **INTENDED AUDIENCE**

This document is intended for use by individuals and companies engaged in storage management.

## **VERSIONING POLICY**

This document is versioned material. Versioned material shall have a three-level revision identifier, comprised of a version number ‘v’, a release number ‘r’ and an errata number ‘e’. Future publications of this document are subject to specific constraints on the scope of change that is permissible from one revision to the next and the degree of interoperability and backward compatibility that should be assumed between products designed to this standard. This versioning policy applies to all SNIA Swordfish versioned materials.

**Version Number:** Versioned material having version number ‘v’ shall be backwards compatible with all of revisions of that material that have the same version number ‘v’. There is no assurance of interoperability or backward compatibility between revisions of a versioned material with different version numbers.

**Release Number:** Versioned material with a version number ‘v’ and release number ‘r’ shall be backwards compatible with previous revisions of the material with the same version number, and a lower release number. A minor revision represents a technical change to existing content or an adjustment to the scope of the versioned material. Each minor revision causes the release number to be increased by one.

**Errata Number:** Versioned material having version number ‘v’, a release number ‘r’, and an errata number ‘e’ should be backwards compatible with previous revisions of the material with the same version number and release number (“errata versions”). An errata revision of versioned material is limited to minor corrections or clarifications of existing versioned material. An errata revision may be backwards incompatible, if the incompatibility is necessary for correct operation of implementations of the versioned material.

## **Revision History**

The evolution of this document is summarized in Table 1.

**Table 1:** Revision history

Date	Rev	Notes
19 September 2016	1.0.0	Initial Release
12 October 2016	1.0.1	Errata release for general clean up and formatting consistency
1 November 2016	1.0.2	Errata release to change multiple collections' types from collections (arrays) to ResourceCollections to conform to Redfish usage guidelines  Change multiple collections' types from collections (arrays) to ResourceCollections to conform to Redfish usage guidelines and move NavigationProperties from Links section.
24 January 2017	1.0.3	Errata release to move complex types and enum to versioned namespace  Schedule schema: add property  json schema fix (Swordfish to swordfish)  Specification enhancements, multiple areas  User's guide: multiple new use cases and new document section
25 April 2017	1.0.4	Errata release with minor updates to schema: move FileShare collection, integrate DMTF and SNIA versions of Volume, fix incorrect property references and update descriptions. Update mockups. User's guide: Update cross-references.
3 October 2017	1.0.5	Errata release to include schema simplifications and other lessons from initial implementations, as well as general cleanup of specification.
13 February 2018	1.0.6	Updated Storage Systems model – added notion of Integrated Service Configuration in addition to (and named) Hosted Service Configuration  Added ComplexType common definition section

Date	Rev	Notes
		Added/updated common Redfish property definitions
		Updates to conform to new SNIA templates.
12 October 2018	1.0.7	Enhanced Spare Capacity Management Model; Deprecated Remaining Capacity
		Added OpenAPI support: schema references and OpenAPI YAML files
		Added iSCSI properties for CHAP
		Event usage enhancements and guidance
		Volume schema updates – RAID Type enum (deprecating VolumeType usage), add ReplicaTargets
		Schema updates: Annotations enhancements: Capabilities designations, owning entities, Redfish.Required usage
		Clarified and updated ClassOfService IsDefault property usage
		Updated Capabilities location in hierarchy
		Fix cardinality issue of StorageReplicaInfo usage in StorageGroups and Volume
		Consolidate Client and Server Endpoint Groups into single Endpoint Group entity (deprecate usage of separate Client Endpoint Group and Server Endpoint Group)
		Add MappedVolume construct to StorageGroup – adds LUN info and other properties
		Clarified and updated ClassOfService IsDefault property usage
		Updated Capabilities location in hierarchy
		Fix cardinality issue of StorageReplicaInfo usage in StorageGroups and Volume



Date	Rev	Notes
		Consolidate Client and Server Endpoint Groups into single Endpoint Group entity (deprecate usage of separate Client Endpoint Group and Server Endpoint Group)
		Add MappedVolume construct to StorageGroup – adds LUN info and other properties
8 November 2018	1.0.7a	Restored RAIDType property that was missing from 1.0.7
		Minor correction to schema versioning
22 August 2019	1.1.0	Restructured to add features and profiles
		Add description of SupportedFeatures usage and requirements
		Add requirements for subsets of Add language to clarify support for use with and without the class of service (now an optional feature)
		Added descriptions of support for seamless extension of Redfish Storage model to Swordfish
		Add updated model diagrams to reflect new model permutations
		Added descriptions of new constructs (e.g., Consistency Groups)
		Cleaned up references to Redfish Specification based on latest version
		Add Status Codes clarification and constraints section
12 November 2019	1.1.0	Released as Technical Position
12 November 2019	1.1.0a	Released as Corrected Technical Position
		Formatting fixes – word wrap in pdf doc format to fix truncated lines
		Consistent object labeling in images (replace drive with disk)

Date	Rev	Notes
		Editorial and grammar changes and cleanup to status code guidance section
24 March 2020	1.1.0b	Released as Corrected Technical Position TLS requirements now based on both ISO and SNIA standards Redfish references now based on both ISO and SNIA standards Bibliography added
29 May 2020	1.2.0	Note: This release is done in conjunction with the DMTF's Redfish Forum Work-in-Progress June 2020 release of DSP-IS0014 (v0.95), which contains multiple schema to support this work. Both are released as Working Drafts / work-in-progress for public review, and plan simultaneous releases in early fall 2020 to support full technical specification level capability and availability. Functionality availability in Swordfish includes: <ul style="list-style-type: none"> <li>• Enhancements to Volume, StoragePools</li> <li>• New schema: NVMeDomain</li> </ul> Other supporting documentation released in conjunction with this specification and schema bundle: <ul style="list-style-type: none"> <li>• Multiple mockups reflecting multiple implementation permutation options (available on swordfishmockups.com)</li> <li>• Model overview documentation (NVMe to RF/SF Model Mapping Working Draft, dated May 2020)</li> </ul>
18 August 2020	1.2.1	Note: This release is done in conjunction with the DMTF's Redfish Forum 2020.3 Release of the Redfish Specification, schema bundle and other supporting materials. Functionality availability in Swordfish includes:

Date	Rev	Notes
		<ul style="list-style-type: none"> <li>• NVMe Mapping Support, Enhancements to Volume, StoragePools</li> </ul> <p>Additional Enhancements in the Specification and schema:</p> <ul style="list-style-type: none"> <li>• Added InitializeMethod property to Volume.</li> <li>• Made DedicateSpareDrives ReadWrite-able</li> <li>• Added enhanced Volume Access Capabilities and usage in StorageGroup.</li> <li>• Fix multiple URI issues across various schema.</li> </ul> <p>Updated formatting of tables to support automatic table numbering and ISO compatible table representation.</p>
29 September 2020	1 .2.1a	Added bibliography and updated TLS references
20 October 2020	1 .2.1c	Updated with additional Redfish.URI annotations.
31 October 2020	1 .2.1c	Released as SNIA Standard
2 March 2021	1.2.2	<p>Added sections to document use of complex types.</p> <p>Updated common properties sections.</p> <p>Schema changes:</p> <p>Add actions to Add and Remove drives directly from StoragePool.</p> <p>Split NVMeFirmwareImage and NVMeDomains schemas.</p> <p>Deprecate use of NetworkPort; replace with Port.</p> <p>Update Redfish.URI references.</p> <p>Corrected \$ref references in JSON schema files.</p> <p>Fix incorrect references in deprecated JSON files.</p>
30 August 2021	1.2.3	<p>Adds updates / corrections to Redfish.URI annotations</p> <p>Add IsBootCapable to Volume</p>

---

Date	Rev	Notes
		Add SupportedPoolTypes to StoragePool
5 December 2021	1.2.3	Release as SNIA Standard
12 April 2022	1.2.4	Release as Working Draft. Schema changes: <ul style="list-style-type: none"><li>• FeaturesRegistry: Errata fix – make Features property a collection.</li><li>• IOStatistics: clarify intent regarding reset / wrap.</li><li>• StoragePool: errata fixes for Actions.</li><li>• Volume: errata fixes for Actions. Add: LBAFormatsSupported property to NVMeNamespaceProperties.</li></ul>
12 July 2022	1.2.4a	Release as SNIA Standard.  Includes Errata fixes to multiple profiles.

---

## About SNIA

The Storage Networking Industry Association (SNIA) is a non-profit organization made up of member companies spanning information technology. A globally recognized and trusted authority, SNIA's mission is to lead the storage industry in developing and promoting vendor-neutral architectures, standards and educational services that facilitate the efficient management, movement and security of information.

## Acknowledgements

The SNIA Scalable Storage Management Technical Work Group, which developed and reviewed this work in progress, would like to recognize the significant contributions made by the following members listed in Table 2.

**Table 2:** Contributors

Member	Representatives (* – prior employer)
Broadcom Inc.	Richelle Ahlvers(*)
Cisco Systems, Inc.	Krishnakumar Gowravaram
Dell Inc.	Patrick Boyd
	George Ericson
	Jim Pendergraft
	Sean McGinnis
	Michael Raineri
	Rich Roscoe
Futurewei Inc.	Sean McGinnis(*)
Hitachi Data Systems	Eric Hibbard
Hewlett Packard Enterprise	Jeff Hilland
	Chris Lionetti
	John Mendonca
	Doug Voigt
Inova Development Inc.	Karl Schopmeyer
Intel Corporation	Richelle Ahlvers
	Rajalaxmi Angadi
	Phil Cayton
	Klaudia Jablonska
	Mariusz Krzywiński
	Mateusz Mania
	Slawek Putyrski
	Paul von Behren
Microsemi Corporation	Anand Nagarjan
Microsoft Corporation	Hector Linares
	Jim Pinkerton

---

Member	Representatives (* – prior employer)
	Michael Pizzo
	Scott Seligman
NetApp, Inc.	Don Deel
	Nilesh Maheshwari
ScienceLogic	Patrick Strick
VMware, Inc.	Murali Rajagopal

---

## **1 Abstract**

The Swordfish Scalable Storage Management API (“Swordfish”) defines a RESTful interface and a standardized data model to provide a scalable, customer-centric interface for managing storage and related data services. It extends the Redfish Scalable Platforms Management API Specification (DSP0266) from the DMTF.

## 2 Scope

### 2.1 Document Goals

Swordfish extends the Redfish Scalable Platforms Management API Specification to define a comprehensive, RESTful API for storage management that addresses block storage, file systems, object storage, and storage network infrastructure. It is centered around common operational and business concerns of storage management, including:

- Configuration and provisioning
- Monitoring
- Event and log management
- Performance assessment
- Diagnostics
- Fault detection and remediation
- Security
- Accounting and resource consumption

Swordfish's storage model is built around well-defined classes of service, which provide a means to map high-level business goals and objectives to specific, storage-based actions and requirements, in a clear and consistent way that can be applied uniformly across a broad spectrum of storage configurations and storage types (e.g., block storage, file systems, object stores). Common storage management functionality covered by class of service includes snapshots, replication, mapping and masking, and provisioning.

The Redfish specification provides the protocols and a core set of data models and behaviors for the management of systems. It defines the elements and behaviors that are mandatory for all Redfish implementations. Additionally it defines additional elements and behaviors that can be chosen by system vendors or manufacturers. The specifications also defines points at which OEM (system vendor) extensions can be provided by a given implementation. The specifications specifies normative requirements for Redfish Services and associated materials, such as Redfish Schema files. The Redfish specifications does not set requirements for Redfish clients, but will indicate what a Redfish client should do in order to access and utilize a Redfish Service successfully and effectively.

The Swordfish specification defines additional data models and behaviors for the management of storage systems and storage infrastructure. A Swordfish implementation shall conform to all requirements specified in the Redfish specifications.



Swordfish is suitable for a wide range of storage, from small-scale object drives, integrated RAID cards or RBODs providing storage services, to external disk arrays or file servers, to infrastructure providing storage services for converged, hyperscale and large scale cloud environments.

This document defines the Swordfish Scalable Storage Management API.

## **2.2 Audience Assumptions**

As Swordfish is designed as an extension of the Redfish specification, this document is written with the presumption that the reader has a detailed understanding of the Redfish specification. This document cannot be fully understood without that context.

## 3 Normative References

### 3.1 Overview

The documents referenced in Table 3 are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

### 3.2 Approved references

The approved references that contribute to this document are summarized in Table 3.

**Table 3:** Approved normative references

Tag	Title (Version)	Author	URL
ISO - 8601	Data elements and interchange formats – Information interchange – Representation of dates and times – Part 1: Basic rules	ISO / IEC	< <a href="http://www.iso.org/iso/home/store/catalogue_ics/catalogue_detail_ics.htm?csnumber=70907">http://www.iso.org/iso/home/store/catalogue_ics/catalogue_detail_ics.htm?csnumber=70907</a> >
ISO - Direct	ISO / IEC Directives, Part 2: Principles and rules for the structure and drafting of ISO and IEC documents	ISO / IEC	< <a href="https://www.iso.org/sites/directives/current/part2/index.xhtml">https://www.iso.org/sites/directives/current/part2/index.xhtml</a> >
Redfish	Redfish Scalable Platforms Management API Specification (v1.15.1)	DMTF	< <a href="https://www.dmtf.org/sites/default/files/standards/documents/DSP0266_1.15.1.pdf">https://www.dmtf.org/sites/default/files/standards/documents/DSP0266_1.15.1.pdf</a> >
OData	Open Data Protocol (v. 4.01)	OASIS	< <a href="http://docs.oasis-open.org/odata/odata/v4.01/odata-v4.01-part1-protocol.html">http://docs.oasis-open.org/odata/odata/v4.01/odata-v4.01-part1-protocol.html</a> >

Tag	Title (Version)	Author	URL
RFC3986	Uniform Resource Identifier (URI): Generic Syntax (2005)	The Internet Society	< <a href="http://www.rfc-base.org/txt/rfc-3986.txt">http://www.rfc-base.org/txt/rfc-3986.txt</a> >
CSDL	Common Schema Definition Language (4.01)	OASIS	< <a href="https://docs.oasis-open.org/odata/odata/v4.01/odata-v4.01-part3-csdl.pdf">https://docs.oasis-open.org/odata/odata/v4.01/odata-v4.01-part3-csdl.pdf</a> >
ITIL	ITIL Glossary (2011)	ITIL	<a href="https://www.axelos.com/Corporate/media/Files/Glossaries/ITIL_2011_Glossary_GB-v1-0.pdf">https://www.axelos.com/Corporate/media/Files/Glossaries/ITIL_2011_Glossary_GB-v1-0.pdf</a>
Units	The Unified Code for Units of Measure (v2.0.1)	Regenstrief Institute, Inc. and the UCUM Organization	< <a href="http://unitsofmeasure.org/trac">http://unitsofmeasure.org/trac</a> >
ISO-20648	Information technology — TLS specification for storage systems	ISO/IEC	< <a href="https://www.iso.org/standard/68622.html">https://www.iso.org/standard/68622.html</a> >
SPC-4	SCSI Primary Commands - 4 (SPC-4) INCITS 513-2015	T10	< <a href="http://www.techstreet.com/cgi-bin/joint.cgi/incits">http://www.techstreet.com/cgi-bin/joint.cgi/incits</a> >
Features	Swordfish Features Registry, version 1.3	SNIA	< <a href="https://redfish.dmtf.org/registries/swordfish/v1/SwordfishFeatureRegistry.1.3.0.json">https://redfish.dmtf.org/registries/swordfish/v1/SwordfishFeatureRegistry.1.3.0.json</a> >
Messages	Swordfish Message Registry, version 1.0.2	SNIA	< <a href="http://redfish.dmtf.org/registries/swordfish/v1/Swordfish.1.0.2.json">http://redfish.dmtf.org/registries/swordfish/v1/Swordfish.1.0.2.json</a> >

Tag	Title (Version)	Author	URL
EnergyStar	ENERGY STAR® Program Requirements for Data Center Storage	EPA	ENERGY STAR® Program Requirements for Data Center Storage

### 3.3 References under development

Documents referenced in Table 4 are under active development, and subject to revision or replacement at any time. In the event that the provided URL is no longer valid, refer to the related parent page to locate a replacement.

**Table 4:** References under development

Tag	Title (Version)	Author	URL	Parent Page
RedfishResource	Redfish Resource and Schema Guide	DMTF	<https://www.dmtf.org/sites/default/files/standards/documents/DSP2046_2022.1.pdf>	<http://www.dmtf.org/redfish>

### 3.4 Other references

None defined in this document.

## 4 Terms and Definitions

### 4.1 Overview

In this document, some terms have a specific meaning beyond the normal English meaning. Those terms are defined in this clause. New terms, frequently used Redfish terms.

### 4.2 Swordfish-specific Terms

#### 4.2.1 Definitions

The terms listed in Table 5 are used in this document.

**Table 5:** Swordfish terms

Term	Definition
Entity	An instance of a schema element.
Model	A set of entities and the relationships between them that define the semantics, behavior and state of that set.
OData service	A REST-based service that allows resources, identified using Uniform Resource Locators (URLs) and defined in a model, to be published and edited by Web clients using simple HTTP messages.
Resource	A central element in a model, which represents a physical construct or a logical service, and is further defined by other model entities.
Schema	A formal language representation of a model that conforms to a metamodel.
Service Document	A particular resource that is directly accessed via an OData service entry point. This resource serves as a starting point for locating and accessing the other resources and associated metadata that together make up an instance of a Swordfish service.
Swordfish service	An extension to the Redfish Service that conforms to the Swordfish specification, and provides REST-ful storage management functionality.

### 4.2.2 Symbols and abbreviated terms

None in this document.

### 4.3 Reference to Redfish terms

Many terms in this document were originally defined in the Redfish Specification. Some of the more common terms and definitions are reproduced in Table 6, as an aid to the reader.

**Table 6:** Redfish terms

Term	Definition (as of 16 August 2019)
OData	The Open Data Protocol, as defined in OData-Protocol.
OData Service Document	Resource that provides information about the service root for generic OData clients.
Redfish Schema	Defines Redfish Resources according to OData schema representation. You can directly translate a Redfish Schema to a JSON Schema representation.
Redfish service	Implementation of the protocols, resources, and functions that deliver the interface that this specification defines and its associated behaviors for one or more managed systems.
Request	A message from a client to a service.
Service Root	Resource that serves as the starting point for locating and accessing the other resources and associated metadata that together make up an instance of a Redfish Service.

### 4.4 Keywords (normative language terms)

This document conforms to ISO/IEC Directives, Part 2 for keyword usage. The most common terms and their intended meanings are summarized Table 7.

**Table 7:** Normative language terms


Term(s)	Meaning
shall / shall not	Used to identify objectively verifiable criteria to be fulfilled and from which no deviation is permitted if compliance with the document is to be claimed
should / should not	Used to identify a suggested possible choice or course of action deemed to be particularly suitable without necessarily mentioning or excluding others
may / need not	Used to convey consent or liberty (or opportunity) to do something
can / cannot	Expected or conceivable material, physical or causal outcome
must	Identifies a constraint or obligation on the user of the document, typically due to one or more legal requirements or laws of nature, that is not stated as a provision of the standard <i>NB:</i> “must” is not an alternative for “shall”, and should only be used for constraints that arise from outside this standard

## 5 Swordfish Overview

### 5.1 Introduction

The Swordfish Scalable Storage Management API (“Swordfish”) defines a RESTful interface and a standardized data model to provide a scalable, customer-centric interface for managing storage and related data services. It extends the Redfish Scalable Platforms Management API Specification (DSP0266) from the DMTF.

### 5.2 Relation to Redfish

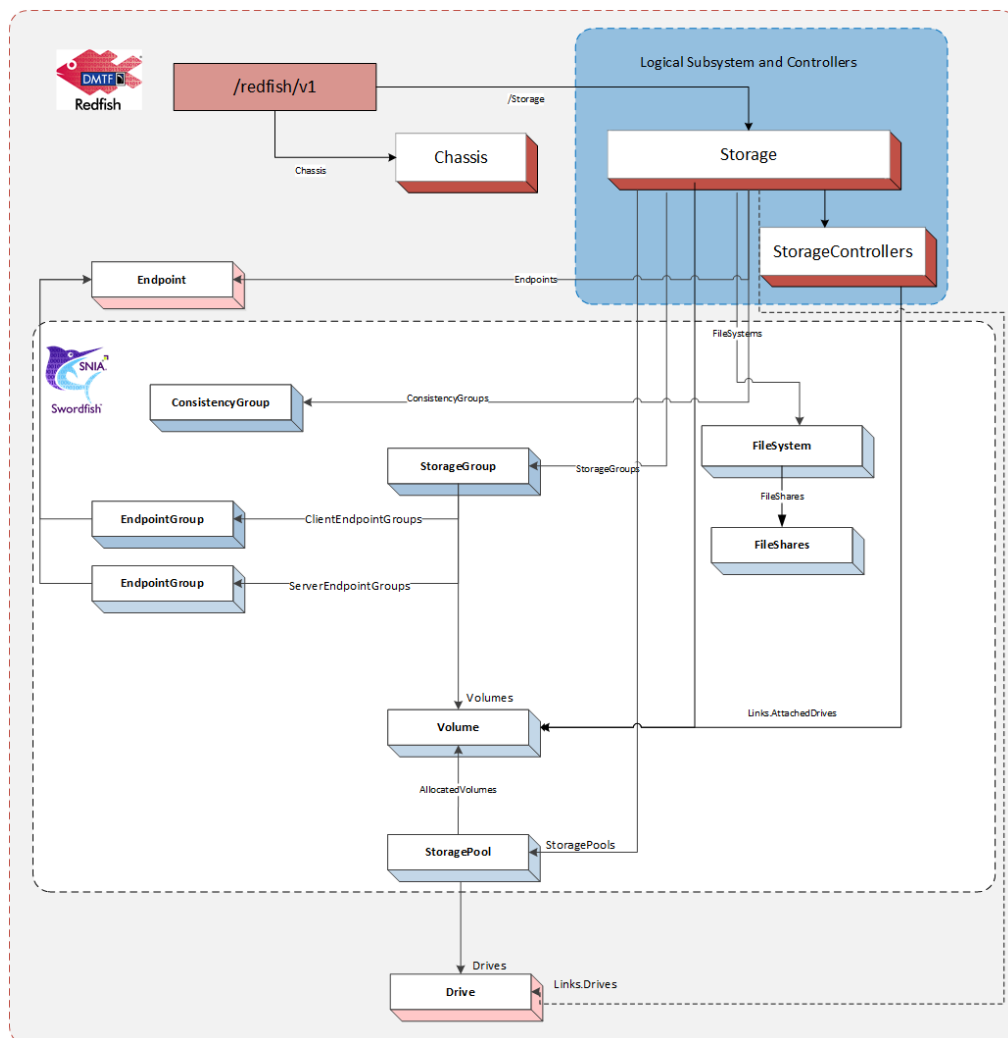

**Figure 1:** Model Overview



The Swordfish service interface extends the Redfish service interface. As such, a Swordfish service is a Redfish service and includes all required elements of the Redfish model, as illustrated by Figure 1.

The storage systems shall be instantiated in one of two places in the hierarchy: - directly in the `Storage` resource collection, or - attached to a `ComputerSystems`, with an associated reference link in the `StorageSystems` resource collection at the Service Root. In this case, there shall also be a reference link to the `Storage` resource in the `Storage` resource collection at the Service Root.

As a result, a Swordfish client is always to locate the storage systems managed by the Swordfish service in the `ServiceRoot` via the `Storage` resource collection; this may be a combination of references to instances and instantiated instances.

The physical infrastructure is modeled using Redfish `Chassis`.

As modeling for storage systems may cover both logical and physical constructs, Swordfish management clients that are focused on logical storage management use cases may choose to manage functionality entirely by way of logical resources.


Each Swordfish service is accessed via well known URLs on the system supporting the Swordfish Service. Since Swordfish is an extension of Redfish, these URLs are the same as for accessing the Redfish defined aspects of the service.

### 5.3 Storage System Models

Swordfish has been designed to support a broad range of configurations, requirements, size and complexity, as well as logical and physical architectures. As a result, there are two primary methods of modelling the storage system for a Swordfish implementation:


#### 1. Swordfish Standalone Configuration

The standalone configuration instantiates the logical storage system instance representation in the `Storage` resource collection directly off the Service Root. The logical storage system is modeled using the Redfish `Storage` and `StorageController` resources, as shown in Figure 2. Managed resources are connected to the `Storage` resource, including `Volumes` and `StoragePools`.

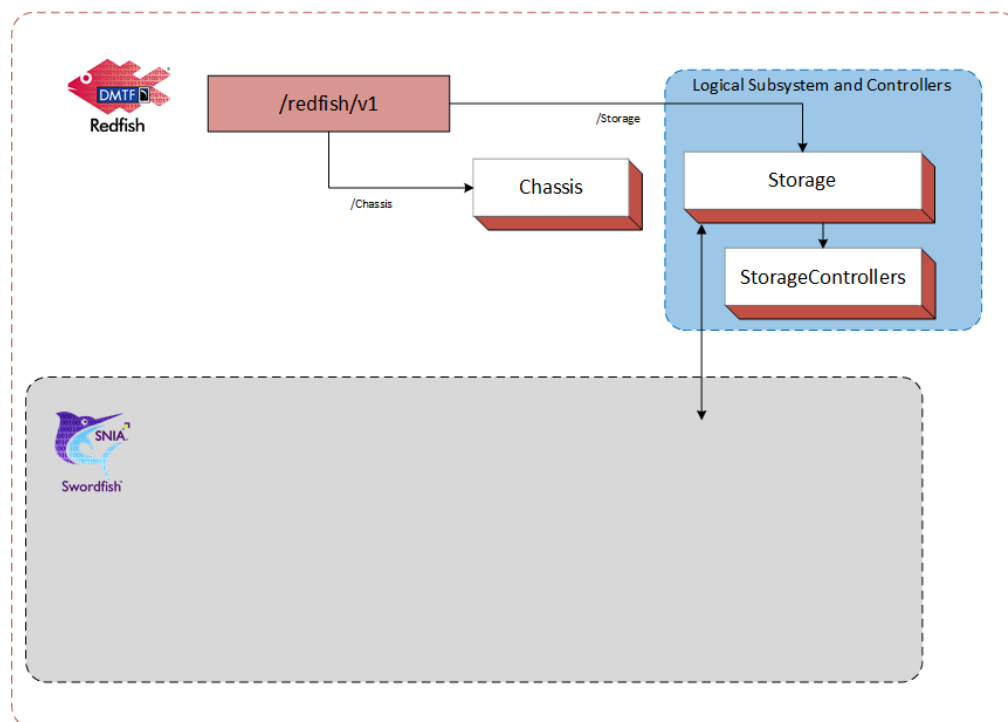

**Figure 2:** Logical Subsystem in Swordfish Standalone Configuration

This configuration works well for standalone devices or storage systems. An example of a Storage System for an standalone configuration is shown in Figure 3.

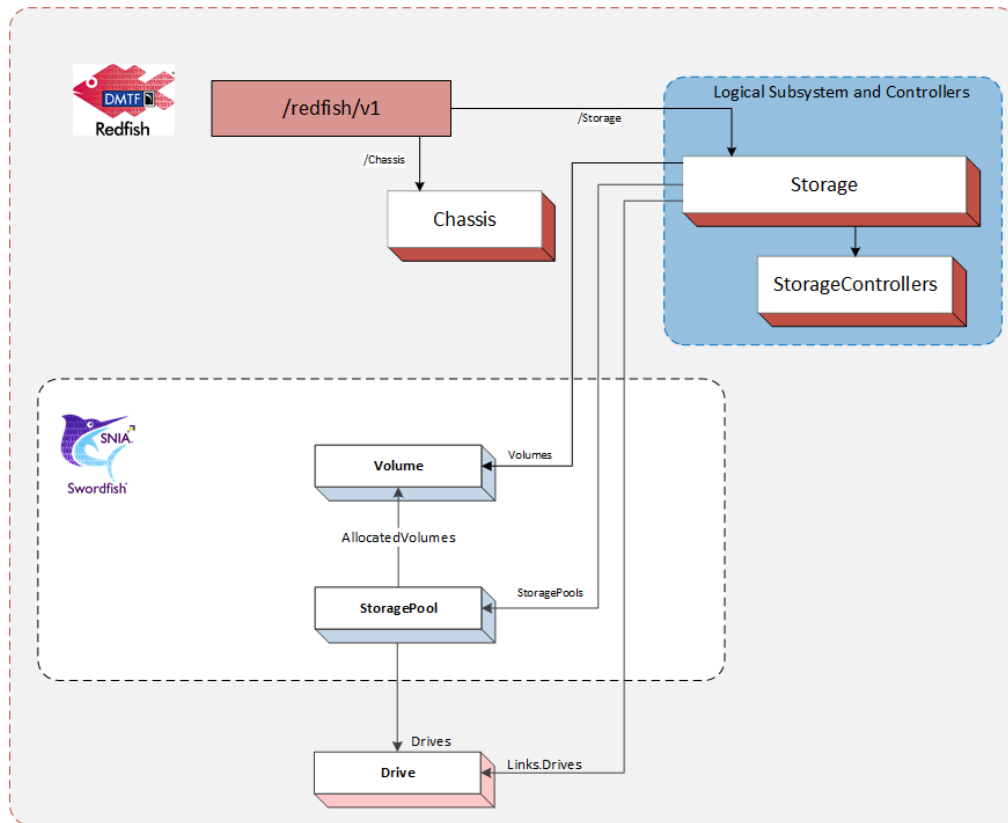


**Figure 3:** Swordfish Standalone Configuration Example

## 2. Swordfish Integrated Configuration

The integrated configuration attaches to the `Storage` collection within the same `ComputerSystem` model instantiation as the server where the physical element resides.


The logical storage system is modeled using the Redfish `Storage` and `StorageController` resources. The `Storage` resource is located in the Redfish hierarchy contained by `ComputerSystems`, typically running as `ApplicationServers`. The physical infrastructure is modeled using Redfish `Chassis`. Managed resources are connected to the `Storage` resource, including `Volumes` and `StoragePools`.

The integrated configuration is illustrated in Figure 4.

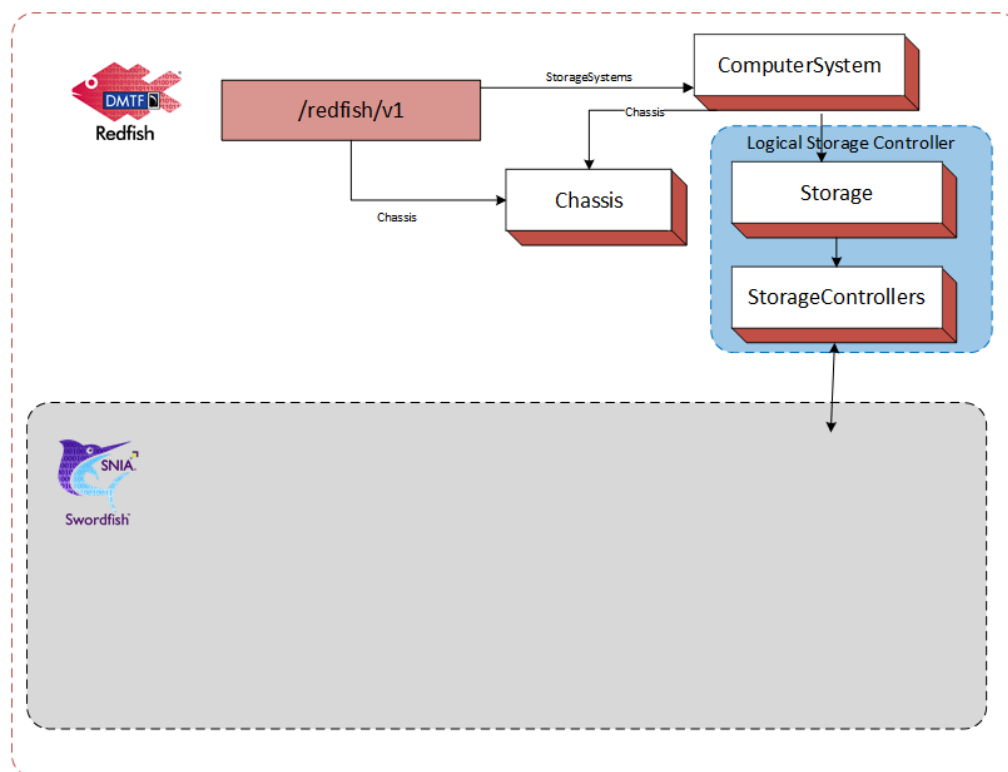

**Figure 4:** Logical Subsystem in Swordfish Integrated Configuration

This configuration works well when the storage system can be modeled by simply instantiating a new `Storage` object within an existing computer system. An example of a Storage System for an integrated configuration is shown in Figure ref{Figure\_5}.

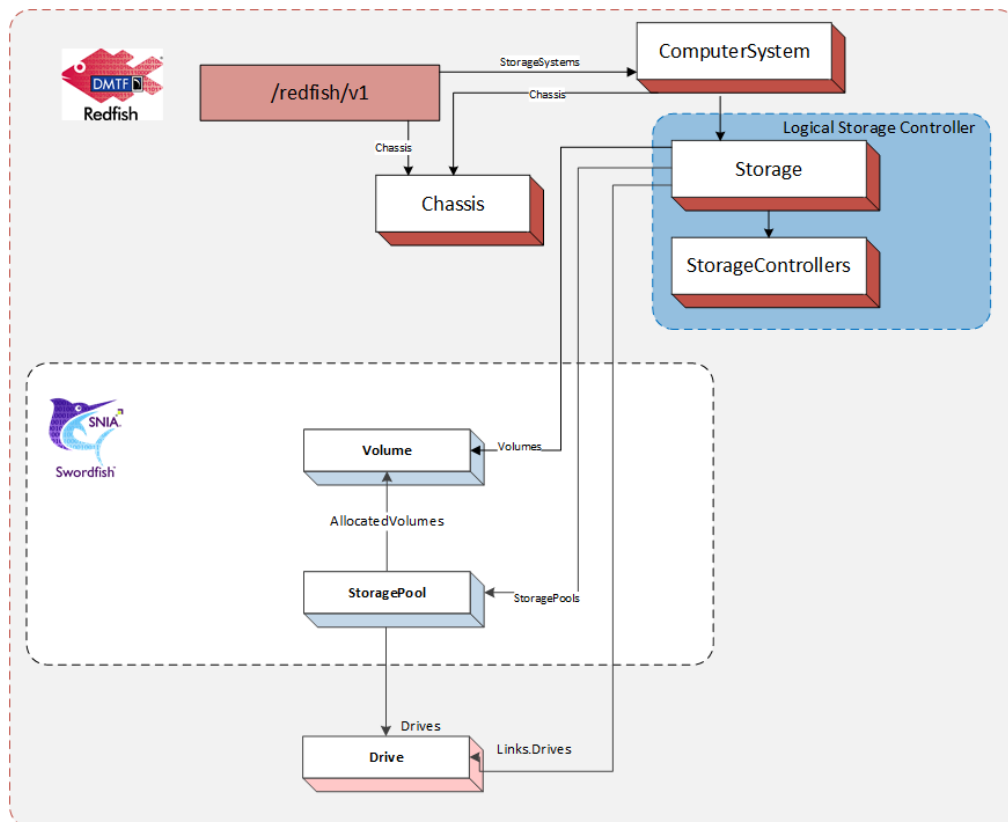

**Figure 5:** Swordfish Integrated Configuration Example

## 5.4 The ServiceRoot and ServiceContainer entities

### 5.4.1 Overview

A **GET** of `/redfish/v1` will return the `ServiceRoot` entity. A **GET** of `/redfish/v1/odata` will return the `ServiceContainer` instances that represents the OData service document. Each of these instances provides links to the remainder of the system.

The following are the elements utilized for Swordfish management.

- `Storage`: A reference to the `Storage` resource collection.
- `Systems`: A reference to a `Systems` resource collection;
- `Chassis`: A reference to a `Chassis` resource collection;
- `StorageSystems`: A reference to a `StorageSystems` resource collection.

### 5.4.2 The Storage resource collection

A resource collection that references a set of `Storage` resources that each represents a storage subsystem. This collection can contain either resources or references to

instances of `Storage` resources. Each `Storage` resource represents an instance of a storage subsystem. For Swordfish subsystems, refer to the details in the Swordfish model overview for details on required elements.

#### **5.4.3 The Systems resource collection**

A resource collection that references a set of `ComputerSystem` resources that each represents a general purpose application server. Each `ComputerSystem` resource will have an entry with the value of “`ApplicationServer`” in its `HostingRoles` property. A particular `ComputerSystem` resource can be in both the `StorageSystems` collection and the `Systems` collection.

#### **5.4.4 The Chassis resource collection**

A resource collection that references a set of `Chassis` resources. Each `Chassis` resource represents physical containers, (i.e. sheet-metal confined spaces and logical zones like racks, enclosures, chassis and all other containers). Subsystems (like sensors), which operate outside of a system’s data plane (meaning the resources are not accessible to software running on the system) are linked either directly or indirectly through this resource.

#### **5.4.5 The StorageSystems resource collection**

A reference to a `ComputerSystemCollection` with members of type `ComputerSystem` that support storage services. These `ComputerSystem` resources represent systems that support Swordfish storage management services. They will have an entry with the value of “`StorageServer`” in their `HostingRoles` property. This collection, then, is a resource collection that references a set of `ComputerSystem` resources that each represents a storage server. Each `ComputerSystem` resource will have an entry with the value of “`StorageServer`” in its `HostingRoles` property. A particular `ComputerSystem` resource can be a member of both the `StorageSystems` resource collection and the `Systems` resource collection.

## 5.5 Swordfish model overview

### 5.5.1 The Storage resource

The storage system exposes logical storage, associated resources and related functionality. Storage resources can be found in the service root or service container via the `Storage` resource collection, and are attached to the `Storage` object within the `Storage` resource collection.

The storage system typically provides the ability to create, manage and present block, file or object store from a set of back-end media, presented to one or more hosts. Storage controllers can work in coordinated sets of one or more to present value-add capabilities, such as failover, data protection, and data path management within the storage system, that are represented through the various resources within the storage system.

The following are the principal properties of `Storage` that point to resources managed or defined by the storage system:

- `Controllers`: A reference to a resource collection that collects `StorageController` resources.
- `Drives`: A reference to a collection that collects `Drive` resources used for storage.
- `Enclosures`: A reference to a resource collection that collects `Chassis` resources that contain storage related resources.
- `Endpoints`: A reference to a resource collection that collects `Endpoint` resources used to access storage.
- `EndpointGroups`: A reference to a resource collection that collects `EndpointGroups` resources.
- `FileSystems`: A reference to a resource collection that collects `FileSystem` resources.
- `StorageGroups`: A reference to a resource collection that collects `StorageGroup` resources.
- `ConsistencyGroups`: A reference to a resource collection that collects `ConsistencyGroup` resources.
- `StoragePools`: A reference to a resource collection that collects `StorageGroup` resources.
- `Volumes`: A reference to a resource collection that collects `Volume` resources.

### **5.5.2 The StorageController resource**

The storage controller presents the foundational resources used by the storage system. It generally contains connectivity resources between the system and connected consumers.

### **5.5.3 The Endpoint resource**

Endpoints represent one end of a protocol specific connection that supports sending or receiving messages according to a particular protocol.

### **5.5.4 The Endpoint Collection resource**

The Endpoint Group is resource collection that references a set of Endpoint resources.

### **5.5.5 The ConsistencyGroup resource**

ConsistencyGroups represent a set of volumes that are managed consistently and collectively as a group, to allow system and application level activities to be performed on a set of data that spans volumes. This activities include device-level replication activities as well as system level functions, such as reset.

When ConsistencyGroups are implemented, they are attached to a Storage resource and its internal Volumes collection is constructed from a subset of the Volumes collection of the Storage resource.

### **5.5.6 The ConsistencyGroup Collection resource**

The ConsistencyGroupCollection is a resource collection that references a set of ConsistencyGroup resources.

### **5.5.7 The StorageGroup resource**

StorageGroups represent a set of volumes that are managed as a group in order to facilitate mapping and masking, in which the volumes of a storage group are collectively exposed or hidden to a set of clients.



The set of volumes is specified by the `Mapped Volumes` attribute. `MappedVolumes` is a resource collection of the `Mapped Volume` construct (a tuple of a pointer to a volume and a corresponding Logical Unit Number for that volume).

The set of client endpoints to which the volumes can be exposed is specified by the `ClientEndpointGroups` attribute. The `ClientEndpointGroup` resource specifies a collection of `EndpointGroup` resources.

The set of server endpoints to which the volumes can be exposed is specified by the `ServerEndpointGroups` attribute. The `ServerEndpointGroup` resource specifies a collection of `EndpointGroup` resources.

### 5.5.8 The `StoragePool` resource

The `StoragePool` resource represents unassigned storage capacity that can be used to produce storage volumes or other storage pools.

The following are the principal properties of `StoragePool` that are used to create or identify resources provisioned or supported by the storage pool:

- `AllocatedVolumes`: A reference to a resource collection that collects `Volume` resources that have been provisioned from the storage pool.
- `AllocatedPools`: A reference to a resource collection that collects `StoragePool` resources that have been provisioned from the storage pool.
- `CapacitySources`: A reference to a resource collection that provides pointers to the capacity sources that are used to provide the underlying capacity for this storage pool.
- `RAIDTypes[]`: The set of `RAIDTypes` supported by this `StoragePool`. This may be set upon `StoragePool` creation, or may be a reflection of the implementation's ability to support different RAID types. Consumers may use this property to determine what RAID types are available from specific `StoragePool` instances for additional `Volume` creation requests, or what `RAIDTypes` have been applied to `Volumes` already allocated.

### 5.5.9 The `Volume` resource

`Volume` resource represents a block-addressable container of storage, sometimes referred to as a "Logical Unit", "LU", "LUN", or "StorageVolume" in the storage industry.

**5.5.10 The FileSystem resource**

This `FileSystem` resource represents a file system. Each `FileSystem` may contain a collection of `FileShares` that can be presented to hosts.

## 6 Features and Profiles

### 6.1 Overview

Features are high-level descriptions of functionality which an implementation uses to advertise what functionality it currently supports, and for some features, is capable of supporting.

The detailed definitions required to describe to implementers how to implement a feature are written in profile definition files. A feature is generally represented in one (but may be more) profile definition file, or profile.

Profiles are detailed descriptions that describe down to the individual property level what functionality is required in order to advertise features. Different profile definitions can exist for the same feature type but for various types of storage configurations: `Swordfish.Block.Provisioning`, `Swordfish.File.Provisioning`

The Swordfish Features Registry shall be used to advertise what standard and Oem Features an implementation supports.

### 6.2 Requirement for SupportedFeatures

`SupportedFeatures` entries in the `Features` registry represent the client's primary initial runtime view of the capabilities of a Swordfish implementation. Without properly formed entries in this registry, there is no visibility to an implementation's functionality.

Swordfish implementations shall implement the `Features` registry and advertise at least the `SNIA.Swordfish.Discovery` supported feature in order to be considered a Swordfish implementation.

Features define coarse-grained sets of functionality. In order to advertise a feature (using the `SupportedFeature` mechanism in the `SupportedFeatures` Registry), the implementation must support the complete set of functionality as defined in the corresponding profile.

The Swordfish Features Registry publishes the official list of supported SNIA Features, and provides a high-level description of their functionality. Many of those features are self-explanatory (e.g., local replication, remote replication), but there are some features where additional context is appropriate:

- Class of Service
- Energy Star for Storage

### 6.3 EnergyStar for Storage Feature

The EnergyStar for Storage Feature and profile has been created to formalize the requirements from the ENERGY STAR Data Center Storage Program Requirements on storage products. The profile indicates what properties Swordfish implementations need to support in order to properly instrument EnergyStar reporting capability. This functionality is intended to support EnergyStar data gathering requirements as part of the EnergyStar certification process.

### 6.4 Class of Service Feature

#### 6.4.1 Overview

Swordfish supports a `ClassOfService` feature. The `ClassOfService` functionality supports systems that are capable of providing a greater level of management automation, where a higher-level set of goals is provided as direction rather than requiring parameterized inputs for all configuration actions.

The Class of Service feature uses a combination of device-defined capabilities to structure `LinesOfService`, which are sets of available functionality in a given system, that can then be grouped together to provide classes of service.


When Class of service functionality is implemented, the Swordfish functionality may be entirely exposed through the `StorageService` resource. Each Swordfish `StorageService` is located in the `ServiceRoot` (and `ServiceContainer`) via the `StorageServices` resource collection.

#### 6.4.2 Class of Service Model

For Swordfish with a class of service interface, the following two models apply. Either model choice results in the same storage service, regardless of the storage system model.

1. Integrated Service Configuration


The storage systems managed by the Swordfish storage service are modeled using the Redfish `Storage` resource and `StorageController` resource collections. The `Storage` resource is located in the Redfish hierarchy contained by `ComputerSystems`, typically running as `ApplicationServers`. The physical infrastructure is modeled using Redfish `Chassis`, as shown in Figure 6.

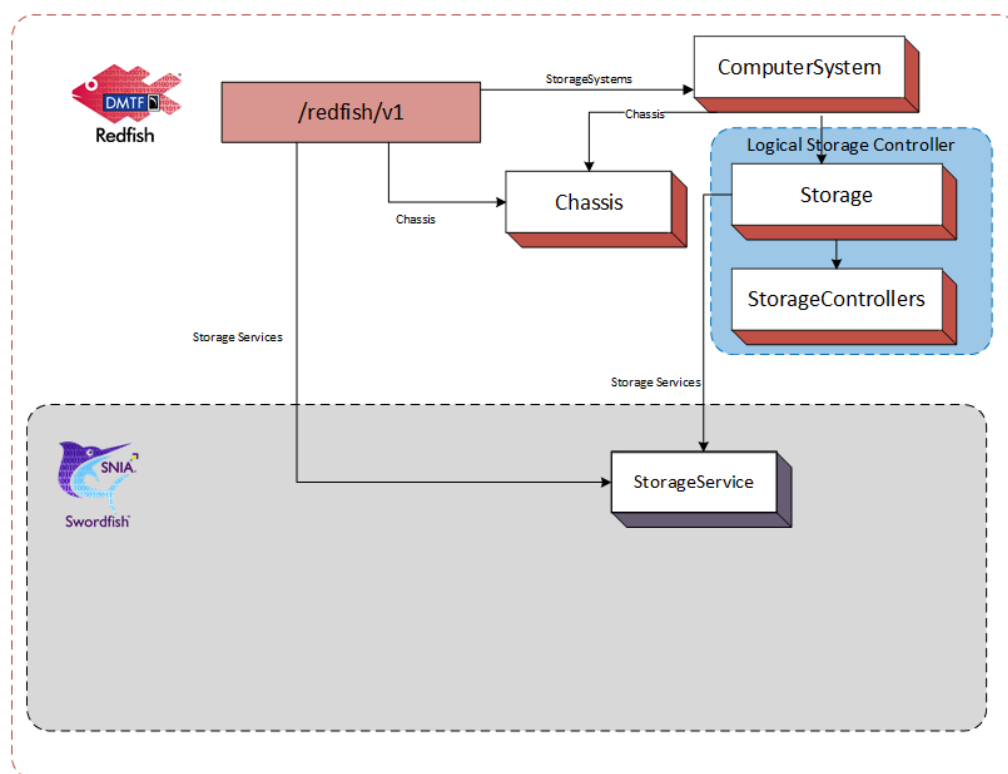

**Figure 6:** Logical Subsystem in Integrated Service Configuration

This configuration works well when the storage service is hosted by a storage resource within a computer system. An example of a Storage Service for an integrated service configuration is shown in Figure 7.


Note: This diagram and the discussion of the configuration description have been simplified slightly to avoid confusion. A full implementation would likely include additional links to the logical storage controller resources.

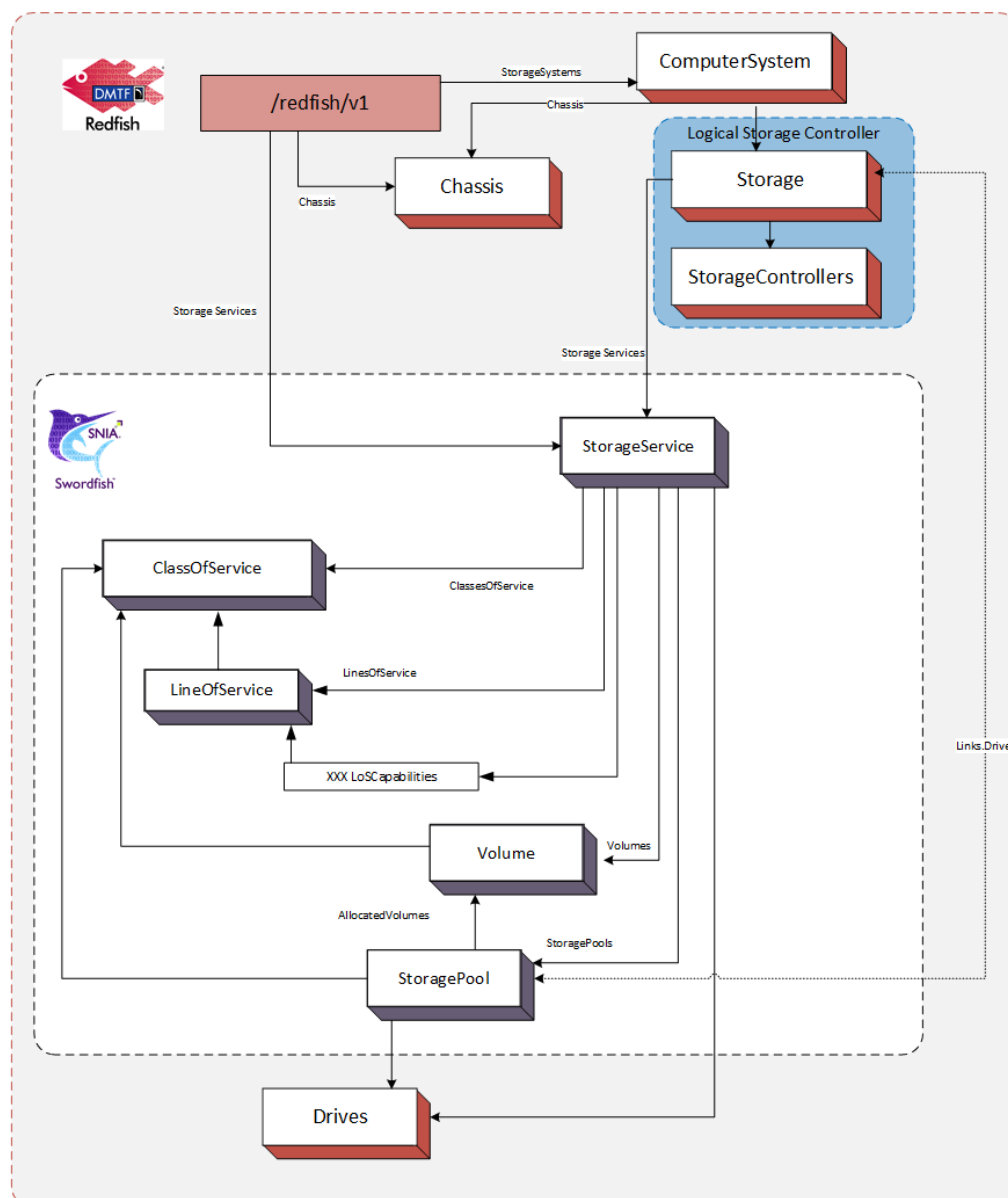

**Figure 7:** Integrated Service Configuration Example

## 2. Standalone Service Configuration


The storage systems managed by the Swordfish storage service are located in the ServiceRoot (and ServiceContainer) via the Storage resource collection. They model the logical storage system using Redfish Storage and 'StorageController' resources. The physical infrastructure is modeled using Redfish Chassis. This is shown in Figure 8.

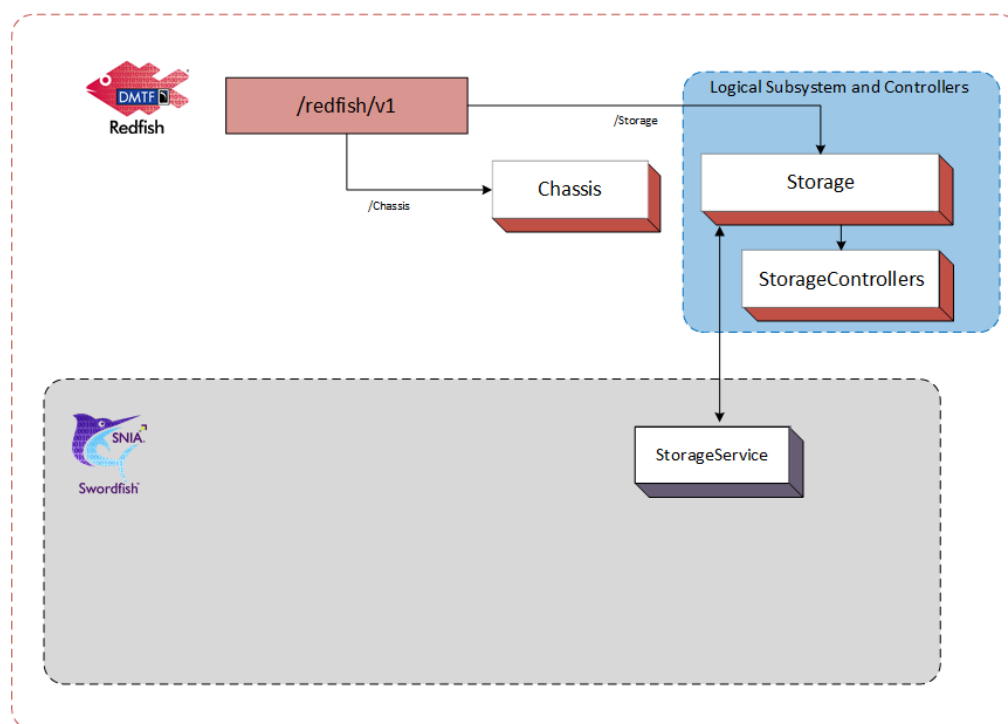

**Figure 8:** Logical Subsystem in Standalone Service Configuration

This configuration works well when the standalone storage system directly hosts the storage service(s). An example of a Storage Service for a hosted service configuration is shown in Figure 9.

Note: This diagram and the discussion of the configuration description have been simplified slightly to avoid confusion. A full implementation would likely include additional links to the logical storage controller resources.

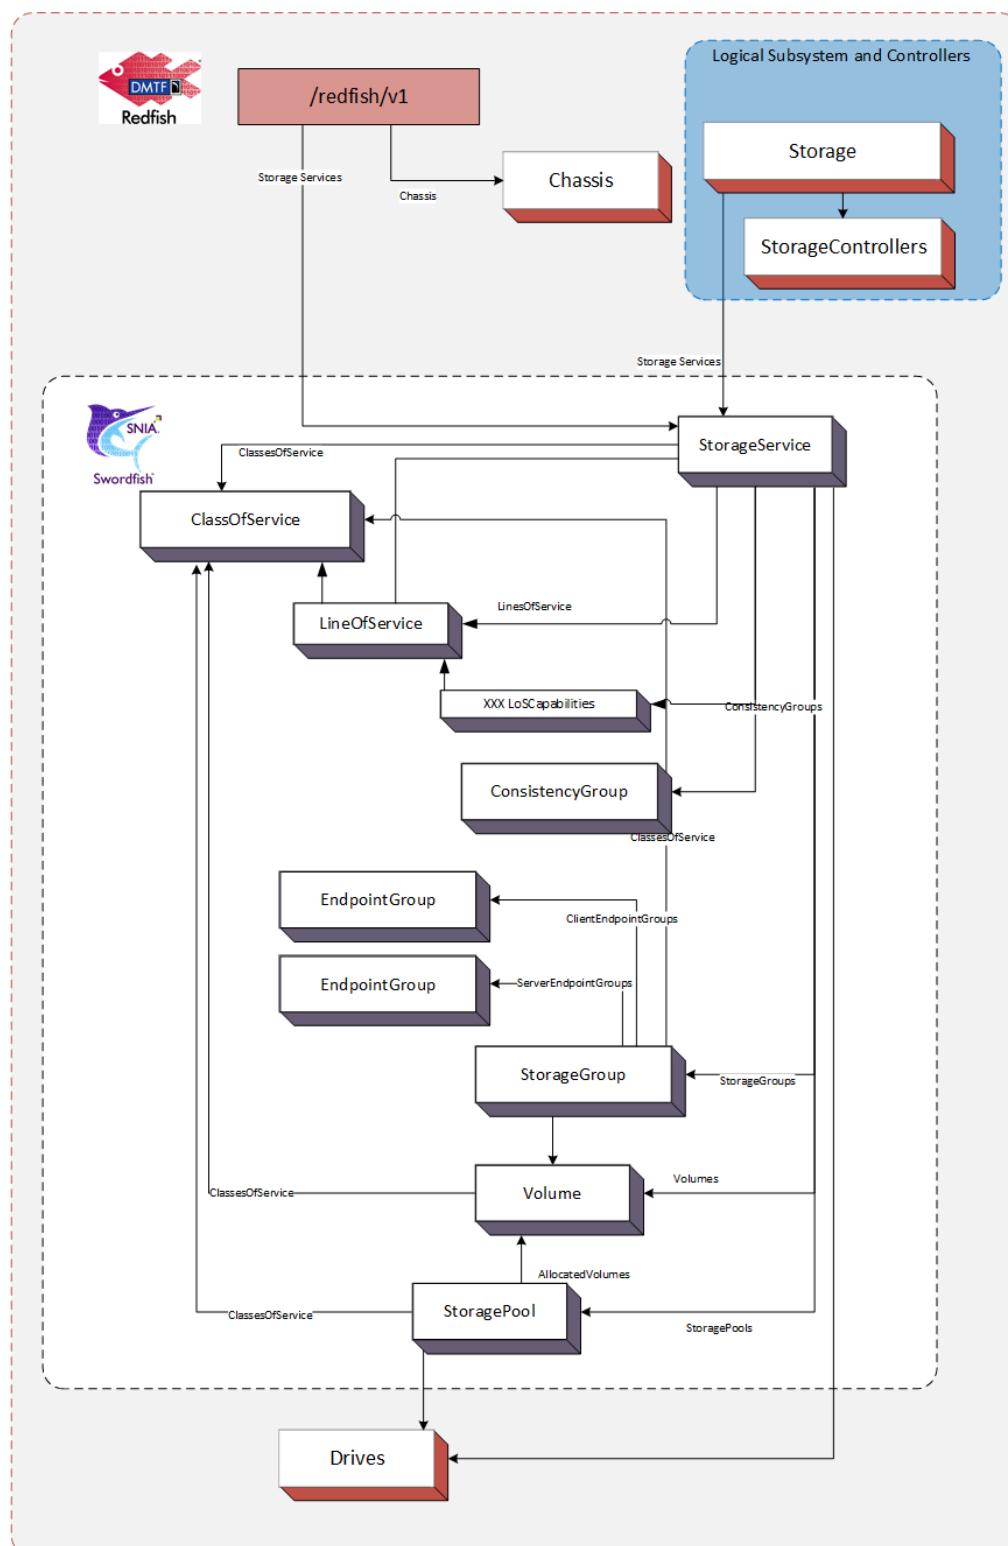

**Figure 9:** Standalone Service Configuration Example



### 6.4.3 ServiceRoot Additions

When the `StorageService` feature is implemented, the following is added to the `ServiceRoot`:

- `StorageServices`: A resource collection that references a set of `StorageService` resources. Each `StorageService` resource represents the resources and behaviors supported by that storage service.

### 6.4.4 The `StorageService` resource

**6.4.4.1 Principal Properties** The storage service is hosted on a storage system and exposes logical storage, associated resources and related functionality. Storage service resources can be found in the service root or service container via the `StorageServices` resource collection.

The following are the principal properties of `StorageService` that point to resources managed or defined by the storage service:

- `ClassesOfService`: A reference to a resource collection that specifies the supported `ClassOfService` resources.
- `Drives`: A reference to a resource collection that collects `Drive` resources used for storage.
- `Enclosures`: A reference to a resource collection that collects `Chassis` resources that contain storage related resources.
- `Endpoints`: A reference to a resource collection that collects `Endpoint` resources used to access storage.
- `FileSystems`: A reference to a resource collection that collects `FileSystem` resources.
- `EndpointGroups`: A reference to a resource collection that collects `EndpointGroups` resources.
- `StorageGroups`: A reference to a resource collection that collects `StorageGroup` resources.
- `StoragePools`: A reference to a resource collection that collects `StorageGroup` resources.
- `Volumes`: A reference to a resource collection that collects `Volume` resources.
- `HostingSystem`: A reference to the `ComputerSystem` instance that hosts this `StorageService`.

**6.4.4.2 Capabilities and Lines of ServiceRoot** The following properties each define a set of attributes, which describe capabilities that the storage service may support:

- **DataProtectionLoSCapabilities:** Replicas that protects data from loss.
- **DataSecurityLoSCapabilities:** Data security service level requirements. The data security characteristics enable the storage system to be used in an environment where compliance with an externally-specified security standard or standards is required. Examples of such standards include FIPS-140, HIPAA and PCI.
- **DataStorageLoSCapabilities:** Provisioning and access characteristics for storage of the data.
- **IOConnectivityLoSCapabilities:** IO connectivity requirements for access to the data.
- **IOPerformanceLoSCapabilities:** IO performance requirements for access to the data.

In each of the above, not all combinations of attribute values defined within a capability are likely to be supported by the storage service.

Known, supported combinations of attribute values are used to construct entries in the `LinesOfService` array property. Not all attributes of a line of service entry need be specified (i.e. some may be Null). If an attribute has no value, the storage service may choose any supported values when provisioning for that entry. Otherwise, the line of service attribute values specifies the kind or level of service to be provided.

**6.4.4.3 The ClassOfService resource** A class of service represents a choice of utility or warranty offered to customers by a service. (ITIL uses the term `service option`. See the Normative References.)

Each `ClassOfService` resource is a uniquely named description of the characteristics of one choice of utility or warranty for a service. Each `ClassOfService` is a description of the kind and quality of service to provide and is not intended to describe how the service provides that service.

Each `ClassOfService` is defined by an aggregation of lines of service. Supported lines of service are listed in the corresponding capabilities attributes of the storage service, (see above).

Currently defined lines of service are:

- **Data Protection:** Describes the characteristics of a replica that protects data from loss.

- **Data Security:** Describe data security service level requirements. The data security characteristics enable the storage system to be used in an environment where compliance with an externally-specified security standard or standards is required. Examples of such standards include FIPS-140, HIPAA and PCI.
- **Data Storage:** Describes provisioning and access characteristics for storage of the data.
- **IO Connectivity:** Describes IO connectivity requirements for access to the data.
- **IO Performance:** Describes the IO performance requirements for access to the data under a particular workload.

Some advertised `ClassOfService` resources are created by the service implementation. These are generally not changeable and are intrinsic to the implementation.

A service may support creation or modification of `ClassOfService` resources. All must be consistent with the capabilities of the service.

**6.4.4.4 The StoragePool resource** When a Swordfish implementation advertises support for the Class of Service feature, the `StoragePool` resource now presents a new method to the client to allocate unassigned storage capacity. This is automated by the system as conformance to one or more classes of service. Requests to `StoragePool` shall automatically allocate capacity based on the constraints of the selected class of service and any other selected parameters, with priority given to the class of service constraints.

The following are the principal properties of `StoragePool` that are used to identify resources provisioned or supported by the storage pool related to Class of Storage:

- `ClassesOfService`: A reference to a resource collection that specifies the set `ClassOfService` resources that can be specified when provisioning resources from the storage pool.
- `DefaultClassOfService`: A reference to the default `ClassOfService` resources used for provisioning from the storage pool.

**6.4.4.5 The Volume resource** `Volume` resource represents a block-addressable container of storage, sometimes referred to as a “Logical Unit”, “LU”, “LUN”, or “StorageVolume” in the storage industry. Volumes optionally adhere to a `ClassOfService`, which defines added functionality. Examples include:

- Access capabilities
- Capacity and capacity sources

- Consumption tracking (e.g., LowSpaceWarningThresholdPercents)
- Replication details
- StorageGroup Information

**6.4.4.6 The FileSystem resource** In a Swordfish implementation that advertises support for the Class of Service feature, File systems represent file-addressable capacity that are conformant to a `ClassOfService`.

## 7 Schema Considerations

### 7.1 Schema Introduction

#### 7.1.1 Overview

A Swordfish implementation is a Redfish implementation, and as such it minimally includes support for some Redfish-defined schema, including `ServiceRoot` and `ComputerSystem`. Swordfish implementations include support for Swordfish-defined schema. The Swordfish model focuses primarily on the logical model of a storage system and does not require full representation of a physical instantiation. This is left to the implementer to complete from available Redfish schema models.

Swordfish schema is conformant with the rules used to define Redfish schema. Redfish schema is conformant with the Common Schema Definition Language, see CSDL. This section provides additional definition and context for the CSDL elements used to define Swordfish schema.

#### 7.1.2 Swordfish Extension of the Redfish ServiceRoot

The Redfish `ServiceRoot` has properties that provide access to Swordfish resources.

The first is `StorageSystems`. This property references a collection of `ComputerSystem` resources that each support Swordfish functionality. Each such `ComputerSystem` shall have an entry in its `HostingRoles` property with the value of `StorageServer`.

For implementations that advertise support for the `ClassOfService` feature, the implementation shall instantiate a collection of `StorageServices` at the `ServiceRoot` with at least one member. The collection provides the client an efficient means to search across all `StorageService` resources, regardless of which `ComputerSystem` is supporting the service.

### 7.2 Default values and NULLABLE attributes

The interaction of `Nullable` and `DefaultValue` needs to be clearly understood by both implementers and client developers. The possible combinations of are summarized in Table 8. The table contains:

- **Nullable:** True, if a given property may be NULL
- **DefaultValue:** True, if a default value is provided for a given property

- **Client:** True, if a client value is supplied for a given property in a query or response
- **Result:** The resultant value of the given property. One of:
  - *C*: The client-provided value
  - *D*: The default value
  - *Null*: Null
  - *I*: Implementation defined
  - *Error*: Error state

**Table 8:** Default and Nullable Interaction

Nullable	DefaultValue	Client	Value
T	T	T	C
T	T	F	D
T	F	T	C
T	F	F	I or Null
F	T	T	C
F	T	F	D
F	F	T	C
F	F	F	I or Error

### 7.3 Common schema annotations

Table 9 lists common annotation used in the definition of Swordfish, for details see OData Capabilities Vocabulary, OData Core Vocabulary, OData Measures Vocabulary, and Redfish Extensions.

**Table 9:** Schema annotations

Name	Applies to	Description
AllowableValues	Parameter	The set of allowable values for a parameter

Name	Applies to	Description
AutoExpand	NavigationProperty	If true, return expand the target element
AutoExpandReferences	NavigationProperty	If true, return references to the target element
ConformanceLevel	EntityContainer	Specifies OData conformance level
Deprecated	All	Specifies that the element may be removed in future major revisions, but shall continue to be supported as specified in the current revision.
Description	All	A brief description of a model element
LongDescription	All	A normative description of a model element
Maximum	Parameter, Property	Maximum value that an integer property or parameter may have
Minimum	Parameter, Property	Minimum value that an integer property or parameter may have
Pattern	Parameter, Property	Specifies a pattern that the value shall match
Permissions	NavigationProperty, Property	Access permission for the property.
Required	NavigationProperty, Property	If true, property is required to be supported by the service. The default is optional. See <i>Required Properties</i>
RequiredOnCreate	NavigationProperty, Property	If true, property is required on creation. See <i>Required Properties</i>

Name	Applies to	Description
Unit	Property	The unit of measure for the value.

## 7.4 Property implementation requirements

The client and the implementer should understand that, regardless of the schema declaration, an implementer may choose to not implement a property. If not implemented, a representation of the property will not be present in a reply. This should not be confused with a response that indicates that a property has been implemented, but has no value (i.e. *propertyName* = *null*).

There are several factors that could affect the implementation choice. Implementation requirements can be defined in many documents. At a minimum, a developer should review, in order: 1. the Redfish specification, 2. this document, and 3. associated profile specifications.

## 7.5 Schema repository

The primary online source for the Swordfish schema shall be co-located on the DMTF schema site with the Redfish schema: <http://redfish.dmtf.org/schemas/swordfish>. Developers may also download the schema as part of the Swordfish bundle from [snia.org](http://snia.org) (refer to [snia.org/swordfish](http://snia.org/swordfish) for pointers to the bundle locations).

Implementations should refer either to the versions available on the [dmtf.org](http://dmtf.org) site or to locally provided instances of the schema.

## 7.6 Referencing other schemas

Swordfish directly references many Redfish schemas when functionality is already defined and can be leveraged. Other Redfish schema may be added by inference or directly to implementations. Examples are available in the Swordfish mockups.



## 8 Implementation requirements

### 8.1 Security

This document generally adheres to the security requirements defined in the Redfish Specification. It extends the Redfish security model in one important way:

Swordfish implementations shall implement TLS as per the guidance in [ISO/IEC 20648](#normat

### 8.2 General constraints

#### 8.2.1 Redfish elements

The Swordfish service interface extends the Redfish service interface. As such, a Swordfish service is a Redfish service and all required elements of the Redfish model shall be present in a Swordfish model.

Swordfish functionality shall not conflict with any previously defined Redfish functionality but it may add to or extend it, and it may add additional constraints on Redfish functionality.

Additionally, any functionality desired in a Swordfish implementation that is specified in Redfish shall follow the requirements as specified in the Redfish specification.

#### 8.2.2 Storage Events

**8.2.2.1 Overview** A Swordfish implementation should implement an event service. Redfish defines the Event Service framework, client subscription model, event delivery mechanism, as well as standard message registries. Swordfish extends the standard message registries to provide additional message registries that correspond to Swordfish-specific services and properties.

The Redfish event service publishes a list of event types supported, and maintains a list of clients that have subscribed. Each subscription maps clients, subscribed events, and the resources that generate them.

**8.2.2.2 Message Registry Selection and Management** Swordfish constrains the existing event model to provide a more consistent handling of event notifications and the related messages, in order to assure that client systems can easily and consistently parse and respond to system-level events.

### 8.2.2.3 Required Usage

- The Resource Event Message Registry defines the underlying messaging model, and shall be used to map messages to resources for storage implementations.
- The Redfish Base Message Registry shall be used to support HTTP connection/error/protocol issues, and general errors.
- The Swordfish Message Registry shall be used as a supplement for the resource event message registry.
- If the Swordfish service implements Redfish tasks (i.e., long-running operations), the implementation shall use the messages defined in the Task Event Message Registry to report status.

### 8.2.2.4 Recommended Usage

- Standard Messages should be used, wherever possible.
- OEM messages should be avoided. Suggestions for clarification or expansion of the existing registries are encouraged. (submissions should be sent to the SNIA Feedback Portal)

## 8.3 Discovering Swordfish resources

Each Swordfish implementation supports the following well-known URLs, as defined in Redfish. Specifically:

- `/Redfish`, which contains one or more version properties for the integrated Swordfish and Redfish implementation, starting with v1.
- `/Redfish/v1`, which addresses a `ServiceRoot` instance, which defines the Redfish default principal starting information for version 1 implementation of an integrated Redfish and Swordfish service. A GET operation to it shall retrieve the value of an instance of a `ServiceRoot` `EntityType` as defined in the `ServiceRoot_v1.xml` file.
- `/Redfish/v1/odata`, which addresses a `ServiceContainer` instance, which defines OData conformant principal starting information for the same version 1 implementation of an integrated Redfish and Swordfish service. A GET operation shall retrieve the value of an instance of a `ServiceContainer` `EntityContainer` as defined in the `ServiceRoot_v1.xml` file.

Note: Since the `ServiceContainer` is required to return an `@odata.context` value

of `/redfish/v1`, all other elements accessed via it will be the same elements found via the `ServiceRoot`.

Note: A Swordfish service is a Redfish service with extensions to support storage management. No additional service entry-points are necessary.

Both the `ServiceRoot` and `ServiceContainer` contain a resource collection named `Systems` that lists `ComputerSystem` instances. A `ComputerSystem` instance that supports Swordfish defined services will have a value of “StorageServer” in an entry of its `HostingRoles` property.

The `ServiceContainer` additionally has a `Service` attribute that references the `ServiceRoot` resource.

Regardless of starting point, the property values of the `ServiceRoot` instance enable navigation to all other resources exposed by the Swordfish service.

## 8.4 ClassOfService requirements

Each `ClassOfService` shall include at least one line of service. The providing server shall assure that the line of service values of a `ClassOfService` collectively represent a supported choice of service.

## 8.5 StorageSystems requirements

For Hosted Service Configurations, this property of the `ServiceRoot` references a collection of `ComputerSystem` resources that each support Swordfish functionality. Each `ComputerSystem` included in the `StorageSystems` entry in the `ServiceRoot` shall have:

- an entry in its `HostingRoles` property with the value of `StorageServer`
- at least one entry in its `StorageServices.Members` property.

For Integrated Service Configurations, the `StorageSystems` concept is realized through the `StorageController` resource. Each `StorageController` instantiated as a Swordfish `StorageSystem` shall have:

- at least one entry in its `StorageController.Links` property `StorageServices` collection identifying related `StorageServices`

## 8.6 Entity Sets

The Swordfish model does not currently expose any explicitly defined entity sets. OData specifies that an entity set is defined for each NavigationProperty that is defined as a collection and that has the ContainsTarget attribute set to true. In all other cases, Swordfish assumes that an entity set is defined globally within the implementation for each entity type. This is effectively the same as if the entity sets were explicitly defined in the ServiceRoot entity container.

## 8.7 Addressing entities within a collection

An instance (entity) of an EntityType is uniquely identified within its entity set by its key. The URI for the reference may specify the key using one of two general strategies

1. OData recommends specifying the key value within parenthesis following the path segment that identifies the referencing entity set. (See clause “Canonical URL” in in OData)
2. Redfish common practice is to use an alternative form that adds a path segment having the value of the key following the path segment that identifies the referencing collection. (See clause “Alternate Key-as-Segment Syntax” in OData.)

A Swordfish implementation shall support both strategies.

## 8.8 Addressing members of a ResourceCollection

Redfish specifies that subclasses of ResourceCollection shall include a Members collection property (See clause “Collection resource response” in DSP0266)

Redfish allows a POST request to a ResourceCollection to be equivalent to the same POST request to the Members property of that ResourceCollection. For a particular ResourceCollection, if a Swordfish implementation supports either form, it shall support both.

It is common practice in Redfish to also eliminate the Members property from any request URI that navigates through a type hierarchy that includes a Member within a ResourceCollection. Care should be taken when defining and using a ResourceCollection subclass to not introduce ambiguities when an explicit reference to a Members property is dropped from a request URI.

## 8.9 HTTP status codes

### 8.9.1 Overview

Status codes are generally defined as part of the general HTTP protocol definition. In addition, the Redfish specification calls out general usage for HTTP status codes. This section provides additional usage guidance and constraints for Swordfish implementations.

In some instances, Redfish and Swordfish expand the standard use of HTTP status codes by associating additional system status with specific status codes. In addition, error response data may be included via standardized message registry entries. The specific messaging requirements will be defined in the following sections.

In cases where Swordfish adds additional constraints or expands on the Redfish handling of a given issue, this document will include a small wording extract from the Redfish specification for additional context. For example:

Swordfish refines the requirements in the *Redfish Specification*: Redfish has no constraint on external storage functionality to require that all references to external storage functionality shall be compliant with the current release of Swordfish.

### 8.9.2 Create

If a request to create a resource can be completed successfully without additional time, the Redfish service shall return a status code of 201, and the body of the response shall contain the JSON representation of the newly created resource.

If the create resource request has been accepted, but no information about the resource can be returned at this point, the Redfish service shall return a status code of 204. The payload of the response shall be empty, but the Location header shall contain the resource URI. The client will be required to poll the appropriate resource to determine both when and if the operation is complete.

Swordfish refines the requirements in of the *Redfish Specification* (see “*Data modification requests overview*” and “*Asynchronous operations*”).

If a request to create a resource cannot be completed without additional time, the implementation shall:

- Populate an initial object. It shall contain, at a minimum, a valid URI, required properties (e.g., ID, name), and Status.State;
- Set Status.State of the partially populated resource to “Creating”;

- Return the appropriate status code, based on the following guidance:
  - If a Task Service has been implemented, the Redfish service shall return a status code of 202, with the Location header set to the URI of the Task Monitor. Once the provider has returned a Task Monitor to the client, the Client can then query the provided task URI to track the task completion status. Upon task completion, a GET against the task monitor may return a status code of 201, and the body of the message shall contain the created resource, provided the task monitor URI remains valid. Refer to the Redfish Task Manager documentation for the lifecycle of the task monitor URI.
  - If a Task Service has not been implemented, the Redfish service shall return a status code of 201, and the body of the response shall contain the URI of the skeletal resource created as part of accepting the request. The client will be required to poll the URI provided to determine when the operation is complete.
- Update Status.State for the object, once the create operation completes.

### 8.9.3 Update, Replace, Delete

If a request to modify or delete a resource can be completed without additional time, the Redfish service shall return a status code of 200, and the body of the response shall contain the JSON representation of the modified (or deleted) resource.

If the resource modification or deletion request has been accepted, but no information about the resource can be returned at this point, the Redfish service shall return a status code of 204. The payload of the response shall be empty. The client will be required to poll the appropriate collection to determine both when and if the operation is complete.

If a request to modify a resource cannot be completed without additional time, the implementation shall:

- Set Status.State of the partially populated resource to “Updating” or “Deleting”, as appropriate;
- Return the appropriate status code, based on the following guidance:
  - If a Task Service has been implemented, the Redfish service shall return a status code of 202, with the Location header set to the URI of the Task Monitor. Once the provider has returned a Task Monitor to the client, the Client can then query the provided task URI to track the task completion status. Upon task completion,

a GET against the task monitor may return a status code of 201, and the body of the message shall contain the created resource, provided the task monitor URI remains valid . Refer to the Redfish Task Manager documentation for the lifecycle of the task monitor URI.

- If a Task Service has not been implemented, the Redfish service shall return a status code of 200, and the body of the response shall contain the URI of the skeletal resource created as part of accepting the request. The client will be required to poll the URI provided to determine when the operation is complete.
- For an update or replace request, the implementation shall update Status.State for the resource, once the modify operation completes.

#### 8.9.4 Actions

Swordfish supports the approach to Actions in the *Redfish Specification*:

Actions are Redfish operations that do not easily map to RESTful interface semantics. These types of operations may not directly affect properties in the Redfish Resources.

Swordfish refines the requirements in the *Redfish Specification*: Services shall support the POST method to send actions to Resources.

If a Task Service has been implemented, the Redfish service shall return a status code of 202, with the Location header set to the URI of the Task Monitor. Once the provider has returned a Task Monitor to the client, the Client can then query the provided task URI to track the task completion status. Once the task has completed successfully, a GET against the task monitor shall return the created object.

If a Task Service has not been implemented, the Redfish service shall return a status code of 200, and the body of the response shall contain the URI of the skeletal resource created as part of accepting the request. The client will be required to poll the URI provided to determine when the operation is complete. When processing ACTIONS, the handling of HTTP status codes is slightly different than that seen when processing CREATE or MODIFY requests. The HTTP status code is used to reflect the acceptance and formatting of the request. The outcome of any requested processing is reflected in the body of the returned message and its associated Error response structure. For example, a properly formatted request to execute a system reset may return an HTTP status code of 200 (OK), to reflect that the request has been received, was validly formatted, and has been accepted for processing, while the reset of the system may

not complete successfully. The Error response structure would contain further detail of the success or failure of the system reset. The implementation must check both the HTTP status code and the underlying Error response message structure to confirm the successful execution of the ACTION.



## 9 Swordfish type definitions

### 9.1 Overview

The following sections define the schema and type definitions that make up a Swordfish implementation. Each data type or entity within the schema includes a description that defines its implementation requirements and their interaction.

### 9.2 Introduction

### 9.3 Universal properties

The properties summarized in Table 10 are defined for inclusion in every Redfish schema, and therefore may be encountered in any response payload. They are documented here to avoid repetition in the property tables. Note that several of these properties are payload annotations, but appear here because they are required for all Redfish and Swordfish Resources.

#### 9.3.0.1 Properties

**Table 10:** Universal properties

Property	Type	Attributes	Notes
<b>@odata.context</b>	string (URI)		<ul style="list-style-type: none"><li>The value of this property shall be the context read-URL that describes the resource according to OData-Protocol and shall be of the form defined only*in the Redfish specification.</li></ul>
<b>@odata.etag</b>	string		<ul style="list-style-type: none"><li>The value of this property shall be a string that is read-defined by the ETag HTTP header definition in RFC7232. only*</li></ul>

Property	Type	Attributes	Notes
<b>@odata.id</b>	string (URI)	read-only required	The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.
<b>@odata.type</b>	string	read-only required	The value of this property shall be a URI fragment that specifies the type of the resource and it shall be of the form defined in the Redfish specification.
<b>Description</b>	string	read-write	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
• <b>*Id**</b>	string	read-write	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Name</b>	string	• read-write required*	This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish writeSpecification.
<b>Oem {}</b>	object		The manufacturer- or provider-specific extension moniker that divides the Oem object into sections.

## 9.4 Frequently used properties

In addition, the properties summarized in Table 11 are frequently defined in Redfish schemas. Their definition and usage is the same throughout the Redfish data model.

### 9.4.0.1 Properties

**Table 11:** Frequent properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>Actions</b> {}</li> </ul>	object		The Redfish actions available for this Resource.
<b>Links</b> {}	object		The links associated with the Resource, as defined by that Resource's schema definition. All associated reference properties defined for a Resource are nested under the Links property. Find all directly referenced, or subordinate, Resource properties from the root of the Resource.
<b>RelatedItem</b> [ {	array		An array of links. Each link points to a Resource or part of a Resource as defined by that Resource's schema. This representation is not intended to be a strong linking methodology like other references. Instead, it shows a relationship between elements or subelements in disparate parts of the service. For example, fans might be in one area of the system and processors in another. The relationship between the two might not be obvious. This property can show that one is related to the other. In this example, it might indicate that a specific fan cools a specific processor.
<b>@odata.id</b>	string (URI)	<ul style="list-style-type: none"> <li>•</li> </ul>	<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul>
}]			

## 9.5 Common Swordfish Objects

The following structures are included in multiple Swordfish schema, and therefore may be encountered in any Response payload. They are documented here to avoid repetition in the Swordfish Specification tables for each schema.

### 9.5.1 Capacity

**9.5.1.1 Description** This composition may be used to represent storage capacity. The sum of the values in Data, Metadata, and Snapshot shall be equal to the total capacity for the data store.

**9.5.1.2 Properties** The properties defined for the Capacity schema are summarized in Table 12.

**Table 12:** Capacity properties

Property	Type	Attributes	Notes
<b>Data</b> {}	object		The value shall be capacity information relating to provisioned user data. For property details, see CapacityInfo.
<ul style="list-style-type: none"> <li><b>boolean</b> <i>*IsTholean</i></li> </ul>		<i>read-only (null)</i>	If the value is false, the capacity shall be fully allocated. The default value shall be false.
<b>Metadata</b> {}	object		The value shall be capacity information relating to provisioned system (non-user accessible) data. For property details, see CapacityInfo.
<b>Snapshot</b> {}	object		The value shall be capacity information relating to provisioned snapshot or backup data. For property details, see CapacityInfo.

## 9.5.2 CapacityInfo

**9.5.2.1 Description** This composition may be used to represent the utilization of storage capacity.

**9.5.2.2 Properties** The properties defined for the CapacityInfo schema are summarized in Table 13.

**Table 13:** CapacityInfo properties

Property	Type	Attributes	Notes
<b>AllocatedBytes</b>	integer (By)	<ul style="list-style-type: none"><li></li></ul> write  {=html}(null)*	The value shall be the number of bytes currently read-allocated by the storage system in this data store for this data type.
<b>ConsumedBytes</b>	integer (By)	<i>read-only</i>  {=html}(null)	The value shall be the number of logical bytes currently consumed in this data store for this data type.
<b>GuaranteedBytes</b>	integer (By)	<ul style="list-style-type: none"><li></li></ul> write  {=html}(null)*	The value shall be the number of bytes the read-storage system guarantees can be allocated in this data store for this data type.

Property	Type	Attributes	Notes
ProvisionedBytes	integer (By)	<ul style="list-style-type: none"><li></li></ul>	The value shall be the maximum number of read-bytes that can be allocated in this data store for this data type.

### 9.5.3 Identifier

**9.5.3.1 Description** This type shall contain any additional identifiers for a resource.

**9.5.3.2 Properties** The properties defined for the Identifier schema are summarized in Table 14.

**Table 14:** Identifier properties

Property	Type	Attributes	Notes
<b>DurableName</b> (v1.1+)	string	<i>read-only</i> (null)	This property shall contain the world-wide unique identifier for the resource. The string shall be in the Identifier.DurableNameFormat property value format.
<ul style="list-style-type: none"> <li><b>DurableNameFormat</b> (v1.1+)</li> </ul>	string (*DurableNameFormat)	<i>read-only</i> (null)	This property shall represent the format of the DurableName property. <i>For the possible property values, see DurableNameFormat in Property details.</i>

### 9.5.3.3 Property details

**9.5.3.3.1 DurableNameFormat:** The defined property values are listed in Table 15. This property shall represent the format of the DurableName property.

**Table 15:** DurableNameFormat property values

string	Description
EUI	This durable name shall contain the hexadecimal representation of the IEEE-defined 64-bit Extended Unique Identifier (EUI), as defined in the IEEE's Guidelines for 64-bit Global Identifier (EUI-64) Specification. The DurableName property shall follow the regular expression pattern $\text{'^}([0-9A-Fa-f]\{2\}[:-])\{7\}([0-9A-Fa-f]\{2\})'$ , where the most significant octet is first. <i>  FC_WWN This durable name shall contain the Wide Name (WWN) format, as defined in the T11 Fibre Channel Physical and Signaling – 3 (FC – FS – 3) specification. The DurableName property shall follow the regular expression pattern <math>\text{'^}([0-9A-Fa-f]\{2\}[:-])\{5\}([0-9A-Fa-f]\{2\})'</math>, where the most significant octet is first.</i>
iQN	This durable name shall be in the iSCSI Qualified Name (iQN) format, as defined in RFC3720 and RFC3721.
MACAddress (v1.14+)	This durable name shall be a media access control address (MAC address), which is a unique identifier assigned to a network interface controller (NIC) for use as a network address. This value should not be used if a more specific type of identifier is available. The DurableName property shall follow the regular expression pattern $\text{'^}([0-9A-Fa-f]\{2\}[:-])\{5\}([0-9A-Fa-f]\{2\})'$ , where the most significant octet is first. <i>  NAA This durable name shall contain the Framing and Signaling – 3 (FC – FS – 3) specification. The DurableName property shall follow the regular expression pattern <math>\text{'^}([0-9A-Fa-f]\{2\})^81,2'</math>, where the most significant octet is first.</i>
NGUID (v1.10+)	This durable name shall be in the Namespace Globally Unique Identifier (NGUID), as defined in the NVN Express Specification. The DurableName property shall follow the regular expression pattern $\text{'^}([0-9A-Fa-f]\{2\})\{16\}\$'$ , where the most significant octet is first.

string	Description
NQN (v1.6+)	This durable name shall be in the NVMe Qualified Name (NQN) format, as defined in the NVN Express over Fabric Specification.
NSID (v1.6+, deprecated v1.12)	This durable name shall be in the NVM Namespace Identifier (NSID) format, as defined in the NVN Express Specification. <i>Deprecated in v1.12 and later. This value has been deprecated due to its non-uniqueness and NGUID should be used.</i>
UUID	This durable name shall contain the hexadecimal representation of the UUID, as defined by RFC4122. The DurableName property shall follow the regular expression pattern '([0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12})'.

#### 9.5.4 IOStatistics

**9.5.4.1 Description** The properties of this type shall be used to represent the IO statistics of the requested object.

**9.5.4.2 Properties** The properties defined for the IOStatistics schema are summarized in Table 16.

**Table 16:** IOStatistics properties

Property	Type	Attributes	Notes
<b>NonIORequests</b>	integer ({ tot})	<ul style="list-style-type: none"> <li>write &lt;br&gt;={html}(null)*</li> </ul>	The value shall represent the total count from read-the time of last reset or wrap of non IO requests.



Property	Type	Attributes	Notes
<b>NonIORequestTime</b>	string	<ul style="list-style-type: none"> <li>The value shall be an ISO 8601 conformant read-duration describing the time that the resource is busy processing non IO requests from the time of last reset or wrap.</li> </ul>	(null)*
<b>*ReadHitIORequests</b>	integer { tot }	<ul style="list-style-type: none"> <li>The value shall represent the total count from the time of last reset or wrap of read IO requests satisfied from memory.</li> </ul>	(null)*
<b>ReadIOOKBytes</b>	integer ( KiBy )	<ul style="list-style-type: none"> <li>The value shall represent the total number of read-kibibytes read from the time of last reset or wrap.</li> </ul>	(null)*
<b>ReadIORequests</b>	integer { tot }	<ul style="list-style-type: none"> <li>The value shall represent the total count from the time of last reset or wrap of read IO requests satisfied from either media or memory (i.e. from a storage device or from a cache).</li> </ul>	(null)*

Property	Type	Attributes	Notes
•	string	•	The value shall be an ISO 8601 conformant read-duration describing the time that the resource is busy processing read requests from the time of last reset or wrap.
*ReadIORequestTime		(null)*	
<b>WriteHitIORequests</b>	integer ([ tot ])	•	The value shall represent the total count from read-the time of last reset or wrap of write IO requests coalesced into memory.
		write	
		 {=html}(null)*	
<b>WriteIOKibytes</b>	integer ( KiBy )	•	The value shall represent the total number of read-kibibytes written from the time of last reset or wrap.
		write	
		 {=html}(null)*	
<b>WriteIORequests</b>	integer ([ tot ])	•	The value shall represent the total count from read-the time of last reset or wrap of write IO requests.
		write	
		 {=html}(null)*	

Property	Type	Attributes	Notes
<b>WriteIORequestTime</b>	string	<ul style="list-style-type: none"> <li>• The value shall be an ISO 8601 conformant read-duration describing the time that the resource is busy processing write requests from the time of the last reset or wrap.</li> </ul>	(nullable)*

### 9.5.5 IOWorkload

**9.5.5.1 Description** This structure may be used to describe an IO Workload.

**9.5.5.2 Properties** The properties defined for the IOWorkload schema are summarized in Table 17.

**Table 17:** IOWorkload properties

Property	Type	Attributes	Notes
<b>Components</b>	array (object)	<ul style="list-style-type: none"> <li>• (nullable)*</li> </ul>	The value shall be an array of IO workload component descriptions. For property details, see IOWorkloadComponent.
<b>Name</b>	string	<ul style="list-style-type: none"> <li>• The value shall be a name of the workload. It should be constructed as OrgID:WorkloadID. Examples: ACME:DSS, ACME:DSS-REP, ACME:Exchange, ACME:OLTP, ACME:OLTP-REPA.</li> </ul>	(An organization may define a set of well known workloads.) (nullable)*

### 9.5.6 IOWorkloadComponent

**9.5.6.1 Description** This structure may be used to describe a component of an IO workload.

**9.5.6.2 Properties** The properties defined for the IOWorkloadComponent schema are summarized in Table 18.

**Table 18:** IOWorkloadComponent properties

Property	Type	Attributes	Notes
<b>AverageIOBytes</b>	integer (By)	<ul style="list-style-type: none"><li></li></ul>	The value shall be the expected average I/O size.
<b>Duration</b>	string (s)	<ul style="list-style-type: none"><li></li></ul>	The value of each entry shall be an ISO 8601 read-duration that shall specify the expected length of time that this component is applied to the workload. This attribute shall be specified if a schedule is specified and otherwise shall not be specified.

Property	Type	Attributes	Notes
<b>IOAccessPattern</b>	string (enum)	<ul style="list-style-type: none"> <li>The enumeration literal shall be the expected read-access pattern. <i>For the possible property values, see IOAccessPattern in Property details.</i></li> </ul>	write  {=html}(null)*
<b>PercentOfData</b>	integer (%)	<ul style="list-style-type: none"> <li>The value shall be the expected percent of the read-data referenced by the workload that is covered by this component.</li> </ul>	write  {=html}(null)*
<b>PercentOfIOPS</b>	integer (%)	<ul style="list-style-type: none"> <li>The value shall be the expected percent of the read-total IOPS for this workload that is covered by this component.</li> </ul>	write  {=html}(null)*
<b>Schedule {}</b>	object		The value shall specifies when this workload component is applied to the overall workload. For property details, see Schedule v1.2.2).

### 9.5.6.3 Property details

**9.5.6.3.1 IOAccessPattern:** The defined property values are listed in Table 19. The enumeration literal shall be the expected access pattern.

**Table 19:** IOAccessPattern property values

string	Description
RandomReadAgain	Use of this enumeration literal shall indicate an access pattern of random reads of cached data.
RandomReadNew	Use of this enumeration literal shall indicate an access pattern of random reads of uncached data.
ReadWrite	Use of this enumeration literal shall indicate a Uniform distribution of reads and writes.
SequentialRead	Use of this enumeration literal shall indicate a sequential read pattern of access.
SequentialWrite	Use of this enumeration literal shall indicate a sequential write pattern of access.

### 9.5.7 Location

**9.5.7.1 Description** This type shall describe the location of a resource.

**9.5.7.2 Properties** The properties defined for the Location schema are summarized in Table 20.

**Table 20:** Location properties

Property	Type	Attributes	Notes
AltitudeMeters (v1.6+)	number (m)	<ul style="list-style-type: none"> <li>write</li> </ul>	<p>This property shall contain the altitude of the read-resource, in meters units, defined as the elevation above sea level.</p> <p>&lt;br&gt;{=html}(null)*</p>

Property	Type	Attributes	Notes
<b>Contacts</b> (v1.7+) [ {	array		This property shall contain an array of contact information for an individual or organization responsible for this resource.
<b>ContactName</b> (v1.7+)	string	<ul style="list-style-type: none"> <li>This property shall contain the name of a person read-or organization to contact for information about this resource.</li> </ul>	write (nullable)*
<b>EmailAddress</b> (v1.7+)	string	<ul style="list-style-type: none"> <li>This property shall contain the email address for read-a person or organization to contact for information about this resource.</li> </ul>	write (nullable)*
<b>PhoneNumber</b> (v1.7+)	string	<ul style="list-style-type: none"> <li>This property shall contain the phone number read-for a person or organization to contact for information about this resource.</li> </ul>	write (nullable)*
}]			
<b>Info</b> (v1.1+, deprecated v1.5)	string	read-only (nullable)	This property shall represent the location of the resource. <i>Deprecated in v1.5 and later. This property has been deprecated in favor of the PostalAddress, Placement, and PartLocation properties.</i>

Property	Type	Attributes	Notes
<b>InfoFormat</b> (v1.1+, deprecated v1.5)	string	read-only (null)	This property shall represent the Info property format. <i>Deprecated in v1.5 and later. This property has been deprecated in favor of the PostalAddress, Placement, and PartLocation properties.</i>
<b>Latitude</b> (v1.6+)	number (deg)	<ul style="list-style-type: none"><li>write &lt;br&gt;={html}(null)*</li></ul>	This property shall contain the latitude of the read-resource specified in degrees using a decimal format and not minutes or seconds.
<b>Longitude</b> (v1.6+)	number (deg)	<ul style="list-style-type: none"><li>write &lt;br&gt;={html}(null)*</li></ul>	This property shall contain the longitude of the read-resource specified in degrees using a decimal format and not minutes or seconds.
<b>Oem</b> (v1.1+) { }	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.



Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>Part Location**</b> (v1.5+)</li> </ul>	object		This property shall contain the part location for a resource within an enclosure. This representation shall indicate the location of a part within a location specified by the Placement property.
<b>LocationOrdinalValue</b> (v1.5+)	integer	read-only (null)	This property shall contain the number that represents the location of the part based on the LocationType. LocationOrdinalValue shall be measured based on the Orientation value starting with 0.
<b>LocationType**</b> (v1.5+)	string (enum)	read-only  ={html}(null)	This property shall contain the type of location of the part. <i>For the possible property values, see LocationType in Property details.</i>
<b>Orientation</b> (v1.5+)	string (enum)	read-only  ={html}(null)	This property shall contain the orientation for the ordering used by the LocationOrdinalValue property. <i>For the possible property values, see Orientation in Property details.</i>
<b>Reference</b> (v1.5+)	string (enum)	read-only  ={html}(null)	This property shall contain the general location within the unit of the part. <i>For the possible property values, see Reference in Property details.</i>
<b>ServiceLabel**</b> (v1.5+)	string	read-only (null)	This property shall contain the label assigned for service at the part location.

Property	Type	Attributes	Notes
}			
<b>Placement</b> (v1.3+)	object		This property shall contain a place within the addressed location.
<b>Additional Info</b> (v1.7+)	string	•	This property shall contain additional read-information, such as Tile, Column (Post), Wall, or other designation that describes a location that cannot be conveyed with other properties (as defined for the Placement object).
<b>Rack</b> (v1.3+)	string	•	This property shall contain the name of the rack read-within a row.  write (null)*
<b>RackOffset</b> (v1.3+)	integer	•	The vertical location of the item in the rack. Rack read-offset units shall be measured from bottom to top, starting with 0.  write (null)*

Property	Type	Attributes	Notes
<b>RackOffsetUnits</b> (v1.3+)	string (enum)	<ul style="list-style-type: none"> <li>This property shall contain a RackUnit read-enumeration literal that indicates the type of rack units in use. <i>For the possible property writevalues, see RackOffsetUnits in Property details.</i></li> </ul>	<pre>&lt;br&gt;{=html}(null)*</pre>
<b>Row</b> (v1.3+)	string	<ul style="list-style-type: none"> <li>This property shall contain the name of the row.</li> </ul>	<pre>read-write (null)*</pre>
<b>PostalAddress</b> (v1.3+)	object		This property shall contain a postal address of the resource.
<b>AdditionalCode</b> (v1.3+)	string	<ul style="list-style-type: none"> <li>The value shall conform to the RFC5139-defined read-requirements of the ADDCODE field.</li> </ul>	<pre>write (null)*</pre>

Property	Type	Attributes	Notes
<b>Additional Info</b> (v1.7+)	string	<ul style="list-style-type: none"><li>• The value shall conform to the requirements of read-the LOC field as defined in RFC5139. Provides additional information.</li></ul> write (null)*	
<b>Building</b> (v1.3+)	string	<ul style="list-style-type: none"><li>• The value shall conform to the RFC5139-defined read-requirements of the BLD field. Names the building.</li></ul> write (null)*	
<b>City</b> (v1.3+)	string	<ul style="list-style-type: none"><li>• The value shall conform to the RFC5139-defined read-requirements of the A3 field. Names a city, township, or shi (JP).</li></ul> write (null)*	
<b>Community</b> (v1.3+)	string	<ul style="list-style-type: none"><li>• The value shall conform to the RFC5139-defined read-requirements of the PCN field. A postal community name.</li></ul> write (null)*	

Property	Type	Attributes	Notes
<b>Country**</b> (v1.3+)	string	<ul style="list-style-type: none"> <li>The value shall conform to the RFC5139-defined read-requirements of the Country field.</li> </ul>	write (null)*
<b>District</b> (v1.3+)	string	<ul style="list-style-type: none"> <li>The value shall conform to the RFC5139-defined read-requirements of the A2 field. Names a county, parish, gun (JP), or district (IN).</li> </ul>	write (null)*
<b>Division</b> (v1.3+)	string	<ul style="list-style-type: none"> <li>The value shall conform to the RFC5139-defined read-requirements of the A4 field. Names a city division, borough, city district, ward, or chou</li> </ul>	write(JP). (null)*
<b>Floor</b> (v1.3+)	string	<ul style="list-style-type: none"> <li>The value shall conform to the RFC5139-defined read-requirements of the FLR field. Provides a floor designation.</li> </ul>	write (null)*

Property	Type	Attributes	Notes
<b>GPSCoord</b> (v1.3+, deprecated v1.6)	string	•	The value shall conform to the RFC5139-defined read-requirements of the ADDCODE field. Shall contain the GPS coordinates of the location. If writefurnished, expressed in the '[-][nn]n.nnnnnn, (n [-][nn]n.nnnnn' format. For example, two ull)* comma-separated positive or negative numbers with six decimal places of precision. <i>Deprecated in v1.6 and later. This property has been deprecated in favor of the Longitude and Latitude properties.</i>
<b>HouseNumber</b> (v1.3+)	integer	•	The value shall conform to the RFC5139-defined read-requirements of the HNO field. The numeric portion of the house number. write (n ull)*
<b>HouseNumberSuffix</b> (v1.3+)	string	•	The value shall conform to the RFC5139-defined read-requirements of the HNS field. Provides a suffix to a house number, (F, B, or 1/2). write (n ull)*
<b>Landmark</b> (v1.3+)	string	•	The value shall conform to the RFC5139-defined read-requirements of the LMK field. Identifies a landmark or vanity address. write (n ull)*

Property	Type	Attributes	Notes
LeadingStreetDirection** (v1.3+)	string	<ul style="list-style-type: none"><li>• The value shall conform to the requirements of read-the PRD field as defined in RFC5139. Names a leading street direction, (N, W, or SE).</li></ul>	
Location (v1.3+, deprecated v1.7)	string	<ul style="list-style-type: none"><li>• The value shall conform to the RFC5139-defined read-requirements of the LOC field. Provides additional information. <i>Deprecated in v1.7 and later. This property has been deprecated in favor of the AdditionalInfo property.</i></li></ul>	
Name (v1.3+)	string	<ul style="list-style-type: none"><li>• The value shall conform to the RFC5139-defined read-requirements of the NAM field. Names the occupant.</li></ul>	
Neighborhood** (v1.3+)	string	<ul style="list-style-type: none"><li>• The value shall conform to the RFC5139-defined read-requirements of the A5 field. Names a neighborhood or block.</li></ul>	

Property	Type	Attributes	Notes
<b>PlaceType</b> (v1.3+)	string	<ul style="list-style-type: none"><li>write (null)*</li></ul>	The value shall conform to the RFC5139-defined read-requirements of the PLC field. Examples include office and residence.
<b>POBox</b> (v1.3+)	string	<ul style="list-style-type: none"><li>write (null)*</li></ul>	The value shall conform to the RFC5139-defined read-requirements of the POBOX field. A post office box (PO box).
<b>PostalCode</b> (v1.3+)	string	<ul style="list-style-type: none"><li>write (null)*</li></ul>	The value shall conform to the RFC5139-defined read-requirements of the PC field. A postal code (or zip code).
<b>Road</b> (v1.3+)	string	<ul style="list-style-type: none"><li>write (null)*</li></ul>	The value shall conform to the RFC5139-defined read-requirements of the RD field. Designates a primary road or street.



Property	Type	Attributes	Notes
<b>RoadBranch</b> (v1.3+)	string	<ul style="list-style-type: none"><li>• The value shall conform to the RFC5139-defined read-requirements of the RDBR field. Shall contain a post office box (PO box) road branch.</li></ul>	
<b>RoadPostModifier</b> (v1.3+)	string	<ul style="list-style-type: none"><li>• The value shall conform to the RFC5139-defined read-requirements of the POM field. For example, Extended.</li></ul>	
<b>RoadPreModifier</b> (v1.3+)	string	<ul style="list-style-type: none"><li>• The value shall conform to the RFC5139-defined read-requirements of the PRM field. For example, Old or New.</li></ul>	
<b>RoadSection</b> (v1.3+)	string	<ul style="list-style-type: none"><li>• The value shall conform to the RFC5139-defined read-requirements of the RDSEC field. A road section.</li></ul>	

Property	Type	Attributes	Notes
<b>RDSUBBR</b> (v1.3+)	string	•	<p>The value shall conform to the RFC5139-defined read-requirements of the RDSUBBR field.</p> <p>write (n ull)*</p>
<b>ROOM</b> (v1.3+)	string	•	<p>The value shall conform to the RFC5139-defined read-requirements of the ROOM field. A name or number of a room to locate the resource within the unit.</p> <p>write (n ull)*</p>
<b>SEAT</b> (v1.3+)	string	•	<p>The value shall conform to the RFC5139-defined read-requirements of the SEAT field. A name or number of a seat, such as the desk, cubicle, or workstation.</p> <p>write (n ull)*</p>
<b>STREET</b> (v1.3+)	string	•	<p>The value shall conform to the RFC5139-defined read-requirements of the A6 field. Names a street.</p> <p>write (n ull)*</p>

Property	Type	Attributes	Notes
<b>StreetSuffix</b> (v1.3+)	string	•	The value shall conform to the RFC5139-defined read-requirements of the STS field. Names a street suffix. write (null)*
<b>Territory</b> (v1.3+)	string	•	The value shall conform to the RFC5139-defined read-requirements of the A1 field when it names a territory, state, region, province, or prefecture within a country. write (null)*
<b>TrailingStreetSuffix</b> (v1.3+)	string	•	The value shall conform to the RFC5139-defined read-requirements of the POD field. Names a trailing street suffix. write (null)*
<b>Unit</b> (v1.3+)	string	•	The value shall conform to the RFC5139-defined read-requirements of the UNIT field. The name or number of a unit, such as the apartment or suite, written to locate the resource. write (null)*
}			

### 9.5.7.3 Property details

**9.5.7.3.1 LocationType:** The defined property values are listed in Table 21. This property shall contain the type of location of the part.

**Table 21:** LocationType property values ##### Orientation:

string	Description
Backplane (v1.12+)	This value shall indicate the part is a backplane in an enclosure.
Bay	This value shall indicate the part is located in a bay.
Connector	This value shall indicate the part is located in a connector or port.
Embedded (v1.13+)	This value shall indicate the part is embedded or otherwise permanently incorporated into a larger part or device. This value shall not be used for parts that can be removed by a user or are considered field-replaceable.
Slot	This value shall indicate the part is located in a slot.
Socket	This value shall indicate the part is located in a socket.

The defined property values are listed in Table 22. This property shall contain the orientation for the ordering used by the LocationOrdinalValue property.

**Table 22:** Orientation property values ##### RackOffsetUnits:

string	Description
BackToFront	This value shall indicate the ordering for LocationOrdinalValue is back to front.
BottomToTop	This value shall indicate the ordering for LocationOrdinalValue is bottom to top.
FrontToBack	This value shall indicate the ordering for LocationOrdinalValue is front to back.
LeftToRight	This value shall indicate the ordering for LocationOrdinalValue is left to right.
RightToLeft	This value shall indicate the ordering for LocationOrdinalValue is right to left.

string	Description
TopToBottom	This value shall indicate the ordering for LocationOrdinalValue is top to bottom.

The defined property values are listed in Table 23. This property shall contain a Rack-Unit enumeration literal that indicates the type of rack units in use.

**Table 23:** RackOffsetUnits property values ##### Reference:

string	Description
EIA_310	Rack units shall conform to the EIA-310 standard.
OpenU	Rack units shall be specified in terms of the Open Compute Open Rack Specification.

The defined property values are listed in Table 24. This property shall contain the general location within the unit of the part.

**Table 24:** Reference property values

string	Description
Bottom	This value shall indicate the part is in the bottom of the unit.
Front	This value shall indicate the part is in the front of the unit.
Left	This value shall indicate the part is on the left side of of the unit.
Middle	This value shall indicate the part is in the middle of the unit.
Rear	This value shall indicate the part is in the rear of the unit.
Right	This value shall indicate the part is on the right side of the unit.
Top	This value shall indicate the part is in the top of the unit.

### 9.5.8 Oem

**9.5.8.1 Description** This object represents the OEM properties. The resource values shall comply with the Redfish Specification-described requirements.

**9.5.8.2 Properties** The properties defined for the Oem schema are summarized in Table 25.

**Table 25:** Oem properties

Property	Type	Attributes	Notes
(pattern) {}	object		Property names follow regular expression pattern “ <sup>^</sup> [A-Za-z0-9_]+ <sup>\$</sup> ”

### 9.5.9 ReplicaInfo

**9.5.9.1 Description** The value shall define the characteristics of a replica.

**9.5.9.2 Properties** The properties defined for the ReplicaInfo schema are summarized in Table 26.

**Table 26:** ReplicaInfo properties

Property	Type	Attributes	Notes
<b>ConsistencyEnabled</b>	boolean	<i>read-only (null)</i>	If true, consistency shall be enabled across the source and its associated target replica(s). The default value for this property is false.
<b>ConsistencyState</b>	string (enum)	<i>read-only (null)</i>	The ConsistencyState enumeration literal shall indicate the current state of consistency. <i>For the possible property values, see ConsistencyState in Property details.</i>

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>ConsistencyStatus**</li> </ul>	string (enum)	read-only  ={html}(null)	The ConsistencyStatus enumeration literal shall specify the current status of consistency. Consistency may have been disabled or is experiencing an error condition. <i>For the possible property values, see ConsistencyStatus in Property details.</i>
ConsistencyType	string (enum)	read-only  ={html}(null)	The ConsistencyType enumeration literal shall indicate the consistency type used by the source and its associated target group. <i>For the possible property values, see ConsistencyType in Property details.</i>
<ul style="list-style-type: none"> <li>DataProtectionLineOfService**</li> </ul>	object		The value shall be a pointer to the data protection line of service that describes this replica. See the <i>DataProtectionLineOfService</i> schema for details on this property.
@odata.id	string	read-write	Link to a DataProtectionLineOfService resource. See the Links section and the <i>DataProtectionLineOfService</i> schema for details.
FailedCopyHostIO	boolean	read-only (null)	If true, the storage array shall stop receiving data to the source element if copying to a remote element fails. The default value for this property is false.

Property	Type	Attributes	Notes
<b>PercentSynced</b>	integer (%)	read-only  {=html}(null)	Specifies the percent of the work completed to reach synchronization. Shall not be instantiated if implementation is not capable of providing this information. If related to a group, then PercentSynced shall be an average of the PercentSynced across all members of the group.
<b>RemoteSourceReplica (v1.4+)</b>	string	read-only (null)	The ReplicaFaultDomain enumeration literal shall describe the fault domain (local or remote) of the replica relationship.
	object *Replica** {		Deprecated - Use Source Replica. The value shall reference the resource that is the source of this replica.
<b>@odata.id</b>	string (URI)		<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul> only*
	}		
<b>ReplicaFaultDomain (v1.3+)</b>	string (enum)	read-only  {=html}(null)	The ReplicaFaultDomain enumeration literal shall describe the fault domain (local or remote) of the replica relationship. <i>For the possible property values, see ReplicaFaultDomain in Property details.</i>



Property	Type	Attributes	Notes
<b>ReplicaPriority</b>	string (enum)	read-only  ={html}(null)	The enumeration literal shall specify the priority of background copy engine I/O to be managed relative to host I/O operations during a sequential background copy operation. <i>For the possible property values, see ReplicaPriority in Property details.</i>
<b>ReplicaProgressStatus</b>	string (enum)	read-only  ={html}(null)	The ReplicaProgressStatus enumeration literal shall specify the status of the session with respect to Replication activity. <i>For the possible property values, see ReplicaProgressStatus in Property details.</i>
<b>ReplicaReadOnlyAccess</b>	string (enum)	read-only  ={html}(null)	The enumeration literal shall specify whether the source, the target, or both elements are read only to the host. <i>For the possible property values, see ReplicaReadOnlyAccess in Property details.</i>
<b>ReplicaRecoveryMode</b>	string (enum)	read-only  ={html}(null)	The enumeration literal shall specify whether the copy operation continues after a broken link is restored. <i>For the possible property values, see ReplicaRecoveryMode in Property details.</i>
<b>ReplicaRole</b>	string (enum)	read-only  ={html}(null)	The ReplicaRole enumeration literal shall represent the source or target role of this replica as known to the containing resource. <i>For the possible property values, see ReplicaRole in Property details.</i>
<b>ReplicaSkewBytes</b>	integer (By)	read-only  ={html}(null)	Applies to Adaptive mode and it describes maximum number of bytes the SyncedElement (target) can be out of sync. If the number of out-of-sync bytes exceeds the skew value, ReplicaUpdateMode shall be switched to synchronous.

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <code>string (*Replenum) icaState**</code></li> </ul>		<code>read-only</code> <code>&lt;br&gt;{=html}(null)</code>	The ReplicaState enumeration literal shall specify the state of the relationship with respect to Replication activity. <i>For the possible property values, see ReplicaState in Property details.</i>
<b>ReplicaType</b>	<code>string (enum)</code>	<code>read-only</code> <code>&lt;br&gt;{=html}(null)</code>	The ReplicaType enumeration literal shall describe the intended outcome of the replication. <i>For the possible property values, see ReplicaType in Property details.</i>
<ul style="list-style-type: none"> <li>• <code>string (*Replenum) icaUpdateMode**</code></li> </ul>		<code>read-only</code> <code>&lt;br&gt;{=html}(null)</code>	The enumeration literal shall specify whether the target elements will be updated synchronously or asynchronously. <i>For the possible property values, see ReplicaUpdateMode in Property details.</i>
<b>RequestedReplicaState</b>	<code>string (enum)</code>	<code>read-only</code> <code>&lt;br&gt;{=html}(null)</code>	The last requested or desired state for the relationship. The actual state of the relationship shall be represented by ReplicaState. When RequestedState reaches the requested state, this property shall be null. <i>For the possible property values, see RequestedReplicaState in Property details.</i>
<b>SourceReplica (v1.2+)</b>	<code>object</code>		The value shall contain the URI to the source replica when located on a different Swordfish service instance.
<b>@odata.id</b>	<code>string (URI)</code>	<ul style="list-style-type: none"> <li>• <code>read-only*</code></li> </ul>	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.

Property	Type	Attributes	Notes
}			
<b>SyncMaintained</b>	boolean	read-only (null)	If true, Synchronization shall be maintained. The default value for this property is false.
<b>UndiscoveredElement</b>	string (enum)	read-only  {=html}(null)	The enumeration literal shall specify whether the source, the target, or both elements involved in a copy operation are undiscovered. An element is considered undiscovered if its object model is not known to the service performing the copy operation. <i>For the possible property values, see UndiscoveredElement in Property details.</i>
<b>WhenActivated</b>	string (%)	read-only  {=html}(null)	The value shall be an ISO 8601 conformant time of day that specifies when the point-in-time copy was taken or when the replication relationship is activated, reactivated, resumed or re-established. This property shall be null if the implementation is not capable of providing this information.
<b>WhenDeactivated</b>	string (%)	read-only  {=html}(null)	The value shall be an ISO 8601 conformant time of day that specifies when the replication relationship is deactivated. Do not instantiate this property if implementation is not capable of providing this information.
<b>WhenEstablished</b>	string (%)	read-only  {=html}(null)	The value shall be an ISO 8601 conformant time of day that specifies when the replication relationship is established. Do not instantiate this property if implementation is not capable of providing this information.
<b>WhenSuspended</b>	string (%)	read-only  {=html}(null)	The value shall be an ISO 8601 conformant time of day that specifies when the replication relationship is suspended. Do not instantiate this property if implementation is not capable of providing this information.

Property	Type	Attributes	Notes
<b>WhenSynchronized</b>	string	read-only (nullable)	The value shall be an ISO 8601 conformant time of day that specifies when the elements were synchronized.
<b>WhenSynchronized</b>	string (%)	read-only  {=html} {=null}	The value shall be an ISO 8601 conformant time of day that specifies when the replication relationship is synchronized. Do not instantiate this property if implementation is not capable of providing this information.

### 9.5.9.3 Property details

**9.5.9.3.1 ConsistencyState:** The defined property values are listed in Table 27. The ConsistencyState enumeration literal shall indicate the current state of consistency.

**Table 27:** ConsistencyState property values ##### ConsistencyStatus:

string	Description
Consistent	This enumeration literal shall indicate that the source and target shall be consistent.
Inconsistent	This enumeration literal shall indicate that the source and target are not required to be consistent.

The defined property values are listed in Table 28. The ConsistencyStatus enumeration literal shall specify the current status of consistency. Consistency may have been disabled or is experiencing an error condition.

**Table 28:** ConsistencyStatus property values ##### ConsistencyType:

string	Description
Consistent	This enumeration literal shall indicate that the source and target are consistent.

string	Description
Disabled	This enumeration literal shall indicate that the source and target have consistency disabled.
InError	This enumeration literal shall indicate that the source and target are not consistent.
InProgress	This enumeration literal shall indicate that the source and target are becoming consistent.

The defined property values are listed in Table 29. The ConsistencyType enumeration literal shall indicate the consistency type used by the source and its associated target group.

**Table 29:** ConsistencyType property values ##### ReplicaFaultDomain:

string	Description
Sequentia llyConsistent	This enumeration literal shall indicate that the source and target shall be sequentially consistent.

The defined property values are listed in Table 30. The ReplicaFaultDomain enumeration literal shall describe the fault domain (local or remote) of the replica relationship.

**Table 30:** ReplicaFaultDomain property values ##### ReplicaPriority:

string	Description
Local	This enumeration literal shall indicate that the source and target replicas are contained within a single fault domain.
Remote	This enumeration literal shall indicate that the source and target replicas are in separate fault domains.

The defined property values are listed in Table 31. The enumeration literal shall specify the priority of background copy engine I/O to be managed relative to host I/O operations during a sequential background copy operation.

**Table 31:** ReplicaPriority property values ##### ReplicaProgressStatus:

string	Description
High	Copy engine I/O shall have a higher priority than host I/O.
Low	Copy engine I/O shall have a lower priority than host I/O.
Same	Copy engine I/O shall have the same priority as host I/O.
Urgent	Regardless of the host I/O requests, the Copy operation shall be performed as soon as possible.

The defined property values are listed in Table 32. The ReplicaProgressStatus enumeration literal shall specify the status of the session with respect to Replication activity.

**Table 32:** ReplicaProgressStatus property values ##### ReplicaReadOnlyAccess:

string	Description
Aborting	This enumeration literal shall indicate that replication has an abort in progress.
Completed	This enumeration literal shall indicate that the request is completed. Data flow is idle.
Detaching	This enumeration literal shall indicate that replication has a detach in progress.
Dormant	This enumeration literal shall indicate that the data flow is inactive, suspended or quiesced.
FailingBack	This enumeration literal shall indicate that replication is undoing the result of failover.
FailingOver	This enumeration literal shall indicate that replication is in the process of switching source and target.
Fracturing	This enumeration literal shall indicate that replication has a fracture in progress.
Initializing	This enumeration literal shall indicate that replication is in the process of establishing source/replica relationship and the data flow has not started.

string	Description
Mixed	This enumeration literal shall indicate that replication status is mixed across element pairs in a replication group. Generally, the individual statuses need to be examined.
Pending	This enumeration literal shall indicate that the flow of data has stopped momentarily due to limited bandwidth or a busy system.
Preparing	This enumeration literal shall indicate that replication has preparation in progress.
Req uiresActivate	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be activated before further copy operations can be issued.
R equiresDetach	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be detached before further copy operations can be issued.
Req uiresFracture	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be fractured before further copy operations can be issued.
R equiresResume	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be resumed before further copy operations can be issued.
R equiresResync	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be resynced before further copy operations can be issued.
RequiresSplit	This enumeration literal shall indicate that the requested operation has completed, however, the synchronization relationship needs to be split before further copy operations can be issued.
Restoring	This enumeration literal shall indicate that replication has a restore in progress.

string	Description
Resyncing	This enumeration literal shall indicate that replication has resynchronization in progress.
Splitting	This enumeration literal shall indicate that replication has a split in progress.
Suspending	This enumeration literal shall indicate that replication has a copy operation in the process of being suspended.
Synchronizing	This enumeration literal shall indicate that replication has synchronization in progress.
Terminating	This enumeration literal shall indicate that the replication relationship is in the process of terminating.

The defined property values are listed in Table 33. The enumeration literal shall specify whether the source, the target, or both elements are read only to the host.

**Table 33:** ReplicaReadOnlyAccess property values ##### ReplicaRecoveryMode:

string	Description
Both	Both the source and the target elements shall be read only to the host.
R replicaElement	The replica element shall be read-only to the host.
SourceElement	The source element shall be read-only to the host.

The defined property values are listed in Table 34. The enumeration literal shall specify whether the copy operation continues after a broken link is restored.

**Table 34:** ReplicaRecoveryMode property values ##### ReplicaRole:

string	Description
Automatic	The copy operation shall resume automatically.



string	Description
Manual	The ReplicaState shall be set to Suspended after the link is restored. It is required to issue the Resume operation to continue.

The defined property values are listed in Table 35. The ReplicaRole enumeration literal shall represent the source or target role of this replica as known to the containing resource.

**Table 35:** ReplicaRole property values ##### ReplicaState:

string	Description
Source	This enumeration literal shall indicate a source element.
Target	This enumeration literal shall indicate target element.

The defined property values are listed in Table 36. The ReplicaState enumeration literal shall specify the state of the relationship with respect to Replication activity.

**Table 36:** ReplicaState property values ##### ReplicaType:

string	Description
Aborted	This enumeration literal shall indicate that the copy operation is aborted with the Abort operation. The Resync Replica operation can be used to restart the copy operation.
Broken	This enumeration literal shall indicate that the relationship is non-functional due to errors in the source, the target, the path between the two or space constraints.
Failedover	This enumeration literal shall indicate that the reads and writes are sent to the target element. The source element may not be reachable.
Fractured	This enumeration literal shall indicate that the Target is split from the source. The target may not be consistent.

string	Description
Inactive	This enumeration literal shall indicate that data flow has stopped, writes to source element shall not be sent to target element.
Initialized	This enumeration literal shall indicate that the link to enable replication is established and source/replica elements are associated, but the data flow has not started.
Invalid	This enumeration literal shall indicate that the storage server is unable to determine the state of the replication relationship, for example, after the connection is restored; however, either source or target elements have an unknown status.
Mixed	This enumeration literal shall indicate the ReplicaState of GroupSynchronized. The value indicates the StorageSynchronized relationships of the elements in the group have different ReplicaState values.
Partitioned	This enumeration literal shall indicate that the state of replication relationship can not be determined, for example, due to a connection problem.
Prepared	This enumeration literal shall indicate that initialization is completed, however, the data flow has not started.
Restored	This enumeration literal shall indicate that the source element was restored from the target element.
Skewed	This enumeration literal shall indicate that the target has been modified and is no longer synchronized with the source element or the point-in-time view.
Split	This enumeration literal shall indicate that the target element was gracefully (or systematically) split from its source element – consistency shall be guaranteed.
Suspended	This enumeration literal shall indicate that the data flow between the source and target elements has stopped. Writes to source element shall be held until the relationship is Resumed.

string	Description
Synchronized	This enumeration literal shall indicate that for Mirror, Snapshot, or Clone replication, the target represents a copy of the source.
U nsynchronized	This enumeration literal shall indicate that not all the source element data has been copied to the target element.

The defined property values are listed in Table 37. The ReplicaType enumeration literal shall describe the intended outcome of the replication.

**Table 37:** ReplicaType property values ##### ReplicaUpdateMode:

string	Description
Clone	This enumeration literal shall indicate that replication shall create a point in time, full copy the source.
Mirror	This enumeration literal shall indicate that replication shall create and maintain a copy of the source.
Snapshot	This enumeration literal shall indicate that replication shall create a point in time, virtual copy of the source.
T okenizedClone	This enumeration literal shall indicate that replication shall create a token based clone.

The defined property values are listed in Table 38. The enumeration literal shall specify whether the target elements will be updated synchronously or asynchronously.

**Table 38:** ReplicaUpdateMode property values ##### RequestedReplicaState:

string	Description
Active	This enumeration literal shall indicate Active-Active (i.e. bidirectional) synchronous updates.
Adaptive	This enumeration literal shall indicate that an implementation may switch between synchronous and asynchronous modes.

string	Description
Asynchronous	This enumeration literal shall indicate Asynchronous updates.
Synchronous	This enumeration literal shall indicate Synchronous updates.

The defined property values are listed in Table 39. The last requested or desired state for the relationship. The actual state of the relationship shall be represented by ReplicaState. When RequestedState reaches the requested state, this property shall be null.

**Table 39:** RequestedReplicaState property values ##### UndiscoveredElement:

string	Description
Aborted	This enumeration literal shall indicate that the copy operation is aborted with the Abort operation. The Resync Replica operation can be used to restart the copy operation.
Broken	This enumeration literal shall indicate that the relationship is non-functional due to errors in the source, the target, the path between the two or space constraints.
Failedover	This enumeration literal shall indicate that the reads and writes are sent to the target element. The source element may not be reachable.
Fractured	This enumeration literal shall indicate that the Target is split from the source. The target may not be consistent.
Inactive	This enumeration literal shall indicate that data flow has stopped, writes to source element shall not be sent to target element.
Initialized	This enumeration literal shall indicate that the link to enable replication is established and source/replica elements are associated, but the data flow has not started.
Invalid	This enumeration literal shall indicate that the storage server is unable to determine the state of the replication relationship, for example, after the connection is restored; however, either source or target elements have an unknown status.

string	Description
Mixed	This enumeration literal shall indicate the ReplicaState of GroupSynchronized. The value indicates the StorageSynchronized relationships of the elements in the group have different ReplicaState values.
Partitioned	This enumeration literal shall indicate that the state of replication relationship can not be determined, for example, due to a connection problem.
Prepared	This enumeration literal shall indicate that initialization is completed, however, the data flow has not started.
Restored	This enumeration literal shall indicate that the source element was restored from the target element.
Skewed	This enumeration literal shall indicate that the target has been modified and is no longer synchronized with the source element or the point-in-time view.
Split	This enumeration literal shall indicate that the target element was gracefully (or systematically) split from its source element – consistency shall be guaranteed.
Suspended	This enumeration literal shall indicate that the data flow between the source and target elements has stopped. Writes to source element shall be held until the relationship is Resumed.
Synchronized	This enumeration literal shall indicate that for Mirror, Snapshot, or Clone replication, the target represents a copy of the source.
Unsynchronized	This enumeration literal shall indicate that not all the source element data has been copied to the target element.

The defined property values are listed in Table 40. The enumeration literal shall specify whether the source, the target, or both elements involved in a copy operation are undiscovered. An element is considered undiscovered if its object model is not known to the service performing the copy operation.

**Table 40:** UndiscoveredElement property values

string	Description
ReplicaElement	This enumeration literal shall indicate that the replica element is undiscovered.
SourceElement	This enumeration literal shall indicate that the source element is undiscovered.

### 9.5.10 ReplicaRequest

**9.5.10.1 Description** A ReplicaRequest shall contain information about the ReplicaSource and the ReplicaName.

**9.5.10.2 Properties** The properties defined for the ReplicaRequest schema are summarized in Table 41.

**Table 41:** ReplicaRequest properties

Property	Type	Attributes	Notes
<b>ReplicaName</b> (v1.1+)	string	<ul style="list-style-type: none"> <li>read-write (nullable)*</li> </ul>	The value shall be the names of the replica.
<b>ReplicaSource</b> (v1.1+)	object		The value shall reference a resource to be replicated.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string (URI)	<ul style="list-style-type: none"> <li>•</li> </ul>	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
}			

### 9.5.11 Schedule

**9.5.11.1 Description** The properties of this type shall schedule a series of occurrences.

**9.5.11.2 Properties** The properties defined for the Schedule schema are summarized in Table 42.

**Table 42:** Schedule properties

Property	Type	Attributes	Notes
<b>EnabledDaysOfMonths []</b>	array (integer, null)	read-write	This property shall contain the days of the month when scheduled occurrences are enabled, for enabled days of week and months of year. If the array contains a single value of 0, or if the property is not present, all days of the month shall be enabled.

Property	Type	Attributes	Notes
	array (string (enabledDaysOfWeek** [])	• Days of the week when scheduled occurrences are enabled. If not present, all days of the week shall be enabled. <i>For the possible property values, see EnabledDaysOfWeek in Property details.</i>	
<b>EnabledInterval</b> (v1.1+) []	array (string, null)	read-write	Each value shall be an ISO 8601 conformant interval specifying when occurrences are enabled.
<b>EnabledMonthsOfYear</b> []	array (string (enabledMonthsOfYear [])	• This property shall contain the months of the year when scheduled occurrences are enabled, for enabled days of week and days of month. If not present, all months of the year shall be enabled. <i>For the possible property values, see EnabledMonthsOfYear in Property details.</i>	
<b>InitialStartTime</b>	string (date-time)	• This property shall contain the date and time when the initial occurrence is scheduled to occur.	



Property	Type	Attributes	Notes
<b>Lifetime</b>	string	<ul style="list-style-type: none"> <li>This property shall contain a Redfish Duration read-that describes the time after provisioning when the schedule expires. Pattern: <code>write-?P(⌘D)?(T(⌘H)?(⌘M)?(⌘(.⌘)?S)?)?(n ull)*</code></li> </ul>	
<b>MaxOccurrences</b>	integer	<ul style="list-style-type: none"> <li>This property shall contain the maximum read-number of scheduled occurrences.</li> </ul> <p>write (n ull)*</p>	
<b>Name</b>	string	<ul style="list-style-type: none"> <li>The name of the schedule, which is constructed read-as OrgID:ScheduleName. Examples include ACME:Daily, ACME:Weekly, and writeACME:FirstTuesday.</li> </ul> <p>(n ull)*</p>	
<b>RecurrenceInterval</b>	string	<ul style="list-style-type: none"> <li>This property shall contain a Redfish Duration read-that describes the time until the next occurrence. Pattern: <code>-?P(⌘D)?(T(⌘H)?(⌘M)?(⌘(.⌘)?S)?)?(n ull)*</code></li> </ul> <p>write (n ull)*</p>	

### 9.5.11.3 Property details

**9.5.11.3.1 EnabledDaysOfWeek:** The defined property values are listed in Table 43. Days of the week when scheduled occurrences are enabled. If not present, all days of the week shall be enabled.

**Table 43:** EnabledDaysOfWeek property values ##### EnabledMonthsOfYear:

string	Description
Every	This value indicates that every day of the week has been selected. When used in array properties, such as for enabling a function on certain days, it shall be the only member in the array.
Friday	
Monday	
Saturday	
Sunday	
Thursday	
Tuesday	
Wednesday	

The defined property values are listed in Table 44. This property shall contain the months of the year when scheduled occurrences are enabled, for enabled days of week and days of month. If not present, all months of the year shall be enabled.

**Table 44:** EnabledMonthsOfYear property values

string	Description
April	
August	
December	
Every	This value indicates that every month of the year has been selected. When used in array properties, such as for enabling a function for certain months, it shall be the only member in the array.

string	Description
February	
January	
July	
June	
March	
May	
November	
October	
September	

### 9.5.12 Status

**9.5.12.1 Description** This type shall contain any status or health properties of a resource.

**9.5.12.2 Properties** The properties defined for the Status schema are summarized in Table 45.

**Table 45:** Status properties

Property	Type	Attributes	Notes
<b>Conditions</b> (v1.11+) [ {	array		This property shall represent the active conditions requiring attention in this or a related resource that affects the Health or HealthRollup of this resource. The service may roll up multiple conditions originating from a resource, using the <code>ConditionInRelatedResource</code> message from Base Message Registry.
<b>LogEntry</b> {	object		This property shall contain a link to a resource of type <code>LogEntry</code> that represents the log entry created for this condition.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string (URI)		<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul>
<b>Message**</b>	string		<ul style="list-style-type: none"> <li>This property shall contain a human-readable read-message describing this condition.</li> </ul>
<b>MessageArgs[]</b>	array (string)		<ul style="list-style-type: none"> <li>This property shall contain an array of message read-arguments that are substituted for the arguments in the message when looked up in the message registry. It has the same semantics as the MessageArgs property in the Redfish MessageRegistry schema.</li> </ul>
<b>MessageId</b>	string	read-only required	This property shall contain a MessageId, as defined in the 'MessageId format' clause of the Redfish Specification.
<b>OriginOfCondition**</b>	object		This property shall contain a link to the resource or object that originated the condition. This property shall not be present if the condition was caused by this resource.
<b>@odata.id</b>	string (URI)		<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul>

Property	Type	Attributes	Notes
<b>Resolution</b> (v1.14+)	string	•	This property shall contain the resolution of the read-condition. Services should replace the resolution defined in the message registry with a only*more specific resolution.
<b>Severity</b>	string (enum)	•	This property shall contain the severity of the read-condition. Services can replace the value defined in the message registry with a value only*more applicable to the implementation. <i>For the possible property values, see Severity in Property details.</i>
<b>Timestamp</b>	string (date-time)	•	This property shall indicate the time the read-condition occurred.  only*
}}			
<b>Health</b>	string (enum)	read-only  ={html}(null)	This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification. <i>For the possible property values, see Health in Property details.</i>
• <b>HealthRollup</b> **	string (enum)	read-only  ={html}(null)	This property shall represent the health state of the resource and its dependent resources. The values shall conform to those defined in the Redfish Specification. <i>For the possible property values, see HealthRollup in Property details.</i>
<b>Oem</b> {	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements.

Property	Type	Attributes	Notes
( <b>pattern</b> ) {} }	object		Property names follow regular expression pattern “^[A-Za-z0-9_]+\$”
<b>State</b>	string (enum)	<i>read-only</i>  {=html}(null)	This property shall indicate whether and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable. <i>For the possible property values, see State in Property details.</i>

### 9.5.12.3 Property details

**9.5.12.3.1 Health:** The defined property values are listed in Table 46. This property shall represent the health state of the resource without considering its dependent resources. The values shall conform to those defined in the Redfish Specification.

**Table 46:** Health property values ##### HealthRollup:

string	Description
Critical	A critical condition requires immediate attention.
OK	Normal.
Warning	A condition requires attention.

The defined property values are listed in Table 47. This property shall represent the

health state of the resource and its dependent resources. The values shall conform to those defined in the Redfish Specification.

**Table 47:** HealthRollup property values ##### Severity:

string	Description
Critical	A critical condition requires immediate attention.
OK	Normal.
Warning	A condition requires attention.

The defined property values are listed in Table 48. This property shall contain the severity of the condition. Services can replace the value defined in the message registry with a value more applicable to the implementation.

**Table 48:** Severity property values ##### State:

string	Description
Critical	A critical condition requires immediate attention.
OK	Normal.
Warning	A condition requires attention.

The defined property values are listed in Table 49. This property shall indicate whether and why this component is available. Enabled indicates the resource is available. Disabled indicates the resource has been intentionally made unavailable but it can be enabled. Offline indicates the resource is unavailable intentionally and requires action to make it available. InTest indicates that the component is undergoing testing. Starting indicates that the resource is becoming available. Absent indicates the resource is physically unavailable.

**Table 49:** State property values

string	Description
Absent	This function or resource is either not present or detected.

string	Description
Deferring (v1.2+)	The element does not process any commands but queues new requests.
Disabled	This function or resource is disabled.
Enabled	This function or resource is enabled.
InTest	This function or resource is undergoing testing, or is in the process of capturing information for debugging.
Qualified (v1.9+)	The element quality is within the acceptable range of operation.
Quiesced (v1.2+)	The element is enabled but only processes a restricted set of commands.
StandbyOffline	This function or resource is enabled but awaits an external action to activate it.
StandbySpare	This function or resource is part of a redundancy set and awaits a failover or other external action to activate it.
Starting	This function or resource is starting.
UnavailableOffline (v1.1+)	This function or resource is present but cannot be used.
Updating (v1.2+)	The element is updating and might be unavailable or degraded.

## 9.6 Swordfish Schema Types

### 9.6.1 CapacitySource 1.2.0

**9.6.1.1 Description** This composition may be used to represent the source and type of storage capacity. At most one of the ProvidingDrives, ProvidingVolumes, ProvidingMemoryChunks, ProvidingMemory or ProvidingPools properties may have a value. If any of ProvidingDrives, ProvidingVolumes, ProvidingMemory or ProvidingPools reference more than one resource, allocation of capacity across those resources is implementation dependent.



**9.6.1.2 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId} /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId} /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId} /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId} /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId} /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId} /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId} /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId} /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}

**9.6.1.3 Properties** The properties defined for the CapacitySource 1.2.0 schema are summarized in Table 50.

**Table 50:** CapacitySource 1.2.0 properties

Property	Type	Attributes	Notes
	object		The Actions property shall contain the available actions for this resource.
	(v1.1.2+)* {}		
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.

Property	Type	Attributes	Notes
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>ProvidedCapacity {}</b>	object		The value shall be the amount of space that has been provided from the ProvidingDrives, ProvidingVolumes, ProvidingMemory or ProvidingPools. For property details, see Capacity.
<ul style="list-style-type: none"> <li><b>*ProvidedCapacity {}</b></li> </ul>	object		The value shall reference the provided ClassOfService from the ProvidingDrives, ProvidingVolumes, ProvidingMemoryChunks, ProvidingMemory or ProvidingPools. See the <i>ClassOfService</i> schema for details on this property.
<b>@odata.id</b>	string	<ul style="list-style-type: none"> <li><i>Link to a ClassOfService resource. See the Links read-section and the <i>ClassOfService</i> schema for details.</i></li> </ul>	
<b>ProvidingDrives {}</b>	object		If present, the value shall be a reference to a contributing drive or drives.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string (URI)	<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul>	only*
}			
<b>ProvidingMemory</b> (v1.1+)	object		If present, the value shall be a reference to the contributing memory.
<b>@odata.id</b>	string (URI)	<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul>	only*
}			
<b>ProvidingMemoryChunks</b> (v1.1+)	object		If present, the value shall be a reference to the contributing memory chunks.
<b>@odata.id</b>	string (URI)	<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul>	only*
}			
<b>ProvidingPools</b>	object		If present, the value shall be a reference to a contributing storage pool or storage pools. Contains a link to a resource.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string	•	Link to Collection of <i>StoragePool</i> . See the read-StoragePool schema for details.  only*
<b>ProvisioningVolumes {</b>	object		If present, the value shall be a reference to a contributing volume or volumes. Contains a link to a resource.
<b>@odata.id</b>	string	•	Link to Collection of <i>Volume</i> . See the Volume read-schema for details.  only*
<b>}</b>			

## 9.6.2 CapacitySourceCollection

**9.6.2.1 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/CapacitySources /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources

**9.6.2.2 Properties** The properties defined for the CapacitySourceCollection schema are summarized in Table 51.

**Table 51:** CapacitySourceCollection properties

Property	Type	Attributes	Notes
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Members</b>	array of CapacitySourceCollectionMembers		The value of each member entry shall reference a CapacitySource resource.
<b>@odata.id</b>	string		<ul style="list-style-type: none"> <li>Link to a CapacitySource resource. See the Links read-section and the <i>CapacitySource</i> schema for details.</li> </ul>
<b>Members@odata.nextLink</b>	string (URI)		<ul style="list-style-type: none"> <li>The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members.</li> </ul>
<b>Name</b>	string		<ul style="list-style-type: none"> <li>This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.</li> </ul>

Property	Type	Attributes	Notes
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

### 9.6.3 ClassOfService 1.2.0

**9.6.3.1 Description** This resource shall define a service option composed of one or more line of service entities. ITIL defines a service option as a choice of utility or warranty for a service.

**9.6.3.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId} /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/ClassesOfService/{ClassOfServiceId}

**9.6.3.3 Properties** The properties defined for the ClassOfService 1.2.0 schema are summarized in Table 52.

**Table 52:** ClassOfService 1.2.0 properties

Property	Type	Attributes	Notes
• Actions** (v1.1+) {}	object		The Actions property shall contain the available actions for this resource.

Property	Type	Attributes	Notes
<b>ClassOfServiceVersion</b>	string	•	The version describing the creation or last read-modification of this service option specification. The string representing the version shall be in the form: M + '.' + N + '.' + U Where: M - The major version (in numeric form), N - The minor version (in numeric form), U - The update (e.g. errata or patch in numeric form).
<b>DataProtectionLinesOfService</b> (v1.1.1+)	array		The value shall be a set of data protection service options. Within a class of service, one data protection service option shall be present for each replication session.
<b>@odata.id</b>	string	read-write	Link to a DataProtectionLineOfService resource. See the Links section and the <i>DataProtectionLineOfService</i> schema for details.
<b>DataSecurityLinesOfService</b> (v1.1.1+)	array		The value shall be a set of data security service options.
<b>@odata.id</b>	string	read-write	Link to a DataSecurityLineOfService resource. See the Links section and the <i>DataSecurityLineOfService</i> schema for details.

Property	Type	Attributes	Notes
<b>DataStorageLineOfService</b> (v1.1+)	array		The value shall be a set of data protection service options.
<b>@odata.id</b>	string	read-write	Link to a <i>DataStorageLineOfService</i> resource. See the Links section and the <i>DataStorageLineOfService</i> schema for details.
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>*Id</b>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Identifier</b>	object		The value shall be unique within the managed ecosystem. For property details, see Identifier v1.14.1).
<b>IOConnectivityLineOfService</b> (v1.1+)	array		The value shall be a set of IO connectivity service options. Within a class of service, at most one IO connectivity service option may be present for a value of AccessProtocol.
<b>@odata.id</b>	string	read-write	Link to a <i>IOConnectivityLineOfService</i> resource. See the Links section and the <i>IOConnectivityLineOfService</i> schema for details.



Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>array of IOPerformanceLineOfService**</li> <li>(v1.1.1+)*</li> <li>[ {</li> </ul>			The value shall be a set of IO performance service options.
<b>@odata.id</b> ]]	string	read-write	Link to a IOPerformanceLineOfService resource. See the Links section and the <i>IOPerformanceLineOfService</i> schema for details.
<b>Name</b>	string	read-only required	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.

#### 9.6.4 ClassOfServiceCollection

**9.6.4.1 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService  
 /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/ClassesOfService

**9.6.4.2 Properties** The properties defined for the `ClassOfServiceCollection` schema are summarized in Table 53.

**Table 53:** `ClassOfServiceCollection` properties

Property	Type	Attributes	Notes
<b>Description</b>	string	<i>readOnly</i>	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Members</b>	array		The value of each member entry shall reference a <code>ClassOfService</code> or <code>LineOfService</code> resource.
<b>@odata.id</b>	string		<ul style="list-style-type: none"> <li>Link to a <code>LineOfService</code> resource. See the Links read-section and the <i>LineOfService</i> schema for details.</li> </ul>
<b>Members@odata.nextLink</b>	string (URI)		<ul style="list-style-type: none"> <li>The value of this property shall be a URI to a read-resource, with the same <code>@odata.type</code>, containing the next set of partial members.</li> </ul>
<b>Name</b>	string		<ul style="list-style-type: none"> <li>This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.</li> </ul>

Property	Type	Attributes	Notes
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

### 9.6.5 ConsistencyGroup 1.1.0

**9.6.5.1 Description** A collection of volumes grouped together to ensure write order consistency across all those volumes. A management operation on a consistency group, such as configuring replication properties, applies to all the volumes within the consistency group.

**9.6.5.2 URIs** /redfish/v1/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId} /redfish/v1/StorageServices/{StorageServiceId}/ConsistencyGroups/{ConsistencyGroupId} /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/ConsistencyGroups/{ConsistencyGroupId} /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId}

**9.6.5.3 Properties** The properties defined for the ConsistencyGroup 1.1.0 schema are summarized in Table 54.

**Table 54:** ConsistencyGroup 1.1.0 properties

Property	Type	Attributes	Notes
• Actions** {	object		The Actions property shall contain the available actions for this resource.

Property	Type	Attributes	Notes
<b>#ConsistencyGroup.AssignReplicaTarget {}</b>	object		This action shall be used to establish a replication relationship by assigning an existing consistency group to serve as a target replica for an existing source consistency group. <i>For more information, see the Actions section below.</i>
<b>#ConsistencyGroup.CreateReplicaTarget {}</b>	object		This action shall be used to create a new consistency group resource to provide expanded data protection through a replica relationship with the specified source consistency group. <i>For more information, see the Actions section below.</i>
<b>#ConsistencyGroup.RemoveReplication {}</b>	object		This action shall be used to disable data synchronization between a source and target consistency group, remove the replication relationship, and optionally delete the target consistency group. <i>For more information, see the Actions section below.</i>
<b>#ConsistencyGroup.ResumeReplication {}</b>	object		This action shall be used to resume the active data synchronization between a source and target consistency group, without otherwise altering the replication relationship. <i>For more information, see the Actions section below.</i>

Property	Type	Attributes	Notes
<b>#ConsistencyGroup.ReverseReplicationRelationship {}</b>	object		This action shall be used to reverse the replication relationship between a source and target consistency group. <i>For more information, see the Actions section below.</i>
<b>#ConsistencyGroup.SplitReplication {}</b>	object		This action shall be used to split the replication relationship and suspend data synchronization between a source and target consistency group. <i>For more information, see the Actions section below.</i>
<b>#ConsistencyGroup.SuspendReplication** {}</b>	object		This action shall be used to suspend active data synchronization between a source and target consistency group, without otherwise altering the replication relationship. <i>For more information, see the Actions section below.</i>

Property	Type	Attributes	Notes
	<ul style="list-style-type: none"> <li>string (enum)</li> </ul>	<ul style="list-style-type: none"> <li>The property shall set the consistency method read-used by this group. <i>For the possible property values, see ConsistencyMethod in Property details.</i></li> </ul>	
<b>ConsistencyType</b>	string (enum)	<ul style="list-style-type: none"> <li>This property shall set the consistency type used read-by this group. <i>For the possible property values, see ConsistencyType in Property details.</i></li> </ul>	
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
	<ul style="list-style-type: none"> <li>string (Id)</li> </ul>	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
	<ul style="list-style-type: none"> <li>boolean (IsConsistent)</li> </ul>	read-only (null)	The value of this property shall be set to true when the consistency group is in a consistent state.
<b>Links</b>	object		This property shall contain links to other resources that are related to this resource.

Property	Type	Attributes	Notes
<b>Oem</b> {  }	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>RemoteReplicaTargets</b> (v1.1+) []	array (string, null)	•	The value shall reference the URIs to the remote read-target replicas that are sourced by this replica. Remote indicates that the replica is managed by only* a separate Swordfish service instance.
<b>ReplicaInfo</b> {}	object		This property shall describe the replication relationship between this storage group and a corresponding source storage group. For property details, see ReplicaInfo v1.4.0).
<b>ReplicaTargets</b> [{  @odata.id	array  string (URI)	•	The value shall reference the target replicas that are sourced by this replica.  The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.  only*

Property	Type	Attributes	Notes
}}]			
<b>Status</b>	object		The property shall contain the status of the ConsistencyGroup. For property details, see Status.
	array		An array of references to volumes managed by this storage group.
	*Volumes**		
	[ {		
	@	string	
<b>odata.id</b>		read-write	Link to a Volume resource. See the Links section and the <i>Volume</i> schema for details.
}}]			

#### 9.6.5.4 Actions

##### 9.6.5.4.1 AssignReplicaTarget Description

This action shall be used to establish a replication relationship by assigning an existing consistency group to serve as a target replica for an existing source consistency group.

**Action URI:** {Base URI of target resource}/Actions/ConsistencyGroup.AssignReplicaTarget

##### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the ‘target’ property of the Action are summarized in Table 9.6.5.4.1. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **ReplicaType** | string (enum) | *required* | This parameter shall contain the type of replica relationship to be created. *For the possible property values, see ReplicaType in Property details.* | | **ReplicaUpdateMode** | string (enum) | *required* | This parameter shall specify the replica update mode. *For the possible property values, see ReplicaUpdateMode in Property details.* | | **TargetConsistencyGroup** | string | *required* | This parameter shall contain the Uri to the existing consistency group. | Table: AssignReplicaTarget action parameters



#### 9.6.5.4.2 CreateReplicaTarget Description

This action shall be used to create a new consistency group resource to provide expanded data protection through a replica relationship with the specified source consistency group.

**Action URI:** {Base URI of target resource}/Actions/ConsistencyGroup.CreateReplicaTarget

##### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.5.4.2. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **ConsistencyGroupName** | string | *required* | This parameter shall contain the Name for the target consistency group. | | **ReplicaType** | string (enum) | *required* | This parameter shall contain the type of replica relationship to be created. *For the possible property values, see ReplicaType in Property details.* | | **ReplicaUpdateMode** | string (enum) | *required* | This parameter shall specify the replica update mode. *For the possible property values, see ReplicaUpdateMode in Property details.* | | **TargetStoragePool** | string | *required* | This parameter shall contain the Uri to the existing StoragePool in which to create the target consistency group. | Table: CreateReplicaTarget action parameters

#### 9.6.5.4.3 RemoveReplicaRelationship Description

This action shall be used to disable data synchronization between a source and target consistency group, remove the replication relationship, and optionally delete the target consistency group.

**Action URI:** {Base URI of target resource}/Actions/ConsistencyGroup.RemoveReplicaRelationship

##### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.5.4.3. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **DeleteTargetConsistencyGroup** | boolean | *optional* | This parameter shall indicate whether or not to delete the target consistency group as part of the operation. If not specified, the system should use its default behavior. | | **TargetConsistencyGroup** | string | *required* | This parameter shall contain the Uri to the existing target consistency group. | Table: RemoveReplicaRelationship action parameters

#### 9.6.5.4.4 ResumeReplication Description

This action shall be used to resume the active data synchronization between a source and target consistency group, without otherwise altering the replication relationship.

**Action URI: {Base URI of target resource}/Actions/ConsistencyGroup.ResumeReplication**

#### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.5.4.4.

Parameter Name	Type	Attributes	Notes
<b>TargetConsistencyGroup</b>	string	<i>required</i>	This parameter shall contain the Uri to the existing target consistency group.

Table: ResumeReplication action parameters

#### **9.6.5.4.5 ReverseReplicationRelationship Description**

This action shall be used to reverse the replication relationship between a source and target consistency group.

**Action URI: {Base URI of target resource}/Actions/ConsistencyGroup.ReverseReplicationRelationship**

#### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.5.4.5.

Parameter Name	Type	Attributes	Notes
<b>TargetConsistencyGroup</b>	string	<i>required</i>	This parameter shall contain the Uri to the existing target consistency group.

Table: ReverseReplicationRelationship action parameters

#### **9.6.5.4.6 SplitReplication Description**

This action shall be used to split the replication relationship and suspend data synchronization between a source and target consistency group.

**Action URI: {Base URI of target resource}/Actions/ConsistencyGroup.SplitReplication**

#### **Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.5.4.6.

Parameter Name	Type	Attributes	Notes
<b>TargetConsistencyGroup</b>	string	<i>required</i>	This parameter shall contain the Uri to the existing target consistency group.

Table: SplitReplication action parameters

#### 9.6.5.4.7 SuspendReplication Description

This action shall be used to suspend active data synchronization between a source and target consistency group, without otherwise altering the replication relationship.

**Action URI:** {Base URI of target resource}/Actions/ConsistencyGroup.SuspendReplication

#### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.5.4.7. | Parameter Name | Type | Attributes | Notes | |:-|:-|:-|:-|-----| | **TargetConsistencyGroup** | string | *required* | This parameter shall contain the Uri to the existing target consistency group. | Table: SuspendReplication action parameters

#### 9.6.5.5 Property details

**9.6.5.5.1 ConsistencyMethod:** The defined property values are listed in Table 55. The property shall set the consistency method used by this group.

**Table 55:** ConsistencyMethod property values ##### ConsistencyType:

string	Description
HotStandby	Supports consistency method commonly orchestrated using application-specific code.
Other	Supports consistency method orchestrated using vendor-specific code.
VASA	Supports VMware consistency requirements, such as for VASA and VVOLs.
VDI	Supports Microsoft virtual backup device interface (VDI).
VSS	Supports Microsoft VSS.

The defined property values are listed in Table 56. This property shall set the consistency type used by this group.

**Table 56:** ConsistencyType property values ##### ReplicaType:

string	Description
Applicat ionConsistent	Orchestration exists to either flush or halt pending IO to ensure operations occur in a transactionally consistent manner.
Cr ashConsistent	Requested operations are either triggered or instituted without regard to pending IO.

The defined property values are listed in Table 57. This parameter shall contain the type of replica relationship to be created.

**Table 57:** ReplicaType property values ##### ReplicaUpdateMode:

string	Description
Clone	This enumeration literal shall indicate that replication shall create a point in time, full copy the source.
Mirror	This enumeration literal shall indicate that replication shall create and maintain a copy of the source.
Snapshot	This enumeration literal shall indicate that replication shall create a point in time, virtual copy of the source.
T okenizedClone	This enumeration literal shall indicate that replication shall create a token based clone.

The defined property values are listed in Table 58. This parameter shall specify the replica update mode.

**Table 58:** ReplicaUpdateMode property values

string	Description
Active	This enumeration literal shall indicate Active-Active (i.e. bidirectional) synchronous updates.

string	Description
Adaptive	This enumeration literal shall indicate that an implementation may switch between synchronous and asynchronous modes.
Asynchronous	This enumeration literal shall indicate Asynchronous updates.
Synchronous	This enumeration literal shall indicate Synchronous updates.

### 9.6.6 ConsistencyGroupCollection

**9.6.6.1 URIs** /redfish/v1/Storage/{StorageId}/ConsistencyGroups /redfish/v1/StorageServices/{StorageServiceId}/ConsistencyGroups /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/ConsistencyGroups /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/ConsistencyGroups

**9.6.6.2 Properties** The properties defined for the ConsistencyGroupCollection schema are summarized in Table 59.

**Table 59:** ConsistencyGroupCollection properties

Property	Type	Attributes	Notes
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Members</b>	array		The value of each member entry shall reference a ConsistencyGroup resource.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string	•	Link to a ConsistencyGroup resource. See the read-Links section and the <i>ConsistencyGroup</i> schema for details. only*
}}			
<b>Members@odata.nextLink</b>	string (URI)	•	The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members. only*
<b>Name</b>	string	•	This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish only*Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

### 9.6.7 DataProtectionLineOfService 1.3.0

**9.6.7.1 Description** This service option describes a replica that protects data from loss. The requirements must be met collectively by the communication path and the replica.

**9.6.7.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/DataProtectionLinesOfService/{DataProtectionLineOfServiceId} / redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/DataProtectionLine-sOfService/{DataProtectionLineOfServiceId}

**9.6.7.3 Properties** The properties defined for the DataProtectionLineOfService 1.3.0 schema are summarized in Table 60.

**Table 60:** DataProtectionLineOfService 1.3.0 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>Actions</b> (v1.2+)</li> </ul>	object		The Actions property shall contain the available actions for this resource.
<b>#DataProtectionLineOfService.CreateReplicas {}</b>	object		This action shall create an on-demand replica that conforms to the bound DataProtectionLineOfService. <i>For more information, see the Actions section below.</i>
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the ‘Description’ clause of the Redfish Specification.
<ul style="list-style-type: none"> <li>• <b>Id</b></li> </ul>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the ‘Id’ clause of the Redfish Specification.

Property	Type	Attributes	Notes
<b>Is Isolated</b>	boolean	<ul style="list-style-type: none"><li>•</li></ul>	True shall indicate that the replica is in a read-separate fault domain from its source. The default value of this property is false.
<b>Min Lifetime</b>	string	<ul style="list-style-type: none"><li>•</li></ul>	The value shall be an ISO 8601 duration that read-specifies the minimum required lifetime of the replica. Note: The maximum number of replicas writecan be determined using this value together (n ull)* with the replicaSchedule.
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
	string ( *RecoveryGeographicObjective)	<ul style="list-style-type: none"><li>•</li></ul>	The value specifies the geographic scope of the read-failure domain. For the possible property values, see RecoveryGeographicObjective in Property details.



Property	Type	Attributes	Notes
<b>RecoveryPointObjectiveTime</b>	string	<ul style="list-style-type: none"> <li>The value shall be an ISO 8601 duration that read-specifies the maximum time over which source data may be lost on failure. In the case that writeIsolated = false, failure of the domain is not a consideration.</li> </ul>	(null)*
<b>RecoveryTimeObjective</b>	string (enum)	<ul style="list-style-type: none"> <li>The value shall be an enumeration that indicates the maximum time required to access an alternate replica. In the case that Isolated = false, failure of the domain is not a consideration.</li> </ul>	For the possible property values, see <i>RecoveryTimeObjective</i> in Property details. (null)*
<b>ReplicaAccessLocation {}</b>	object		This value shall be used if the data access location of the replica is required to be at a specific location. Note 1: The location value may be granular. Note 2: A value may be required for some regulatory compliance. For property details, see Location v1.3.0).
<b>ReplicaClassOfService {</b>	object		The value shall reference the class of service that defines the required service levels of the replica. See the <i>ClassOfService</i> schema for details on this property.
<b>@odata.id</b>	string	read-write	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.

Property	Type	Attributes	Notes
<b>ReplicaType</b>	string (enum)	<ul style="list-style-type: none"> <li>The type of replica shall conform to this value. <i>For the possible property values, see ReplicaType in Property details.</i></li> </ul>	<p>write</p> <p>&lt;br&gt;{=html}(null)*</p>
<b>Schedule</b>	object		If a replica is made periodically, the value shall define the schedule. For property details, see Schedule v1.2.2).

#### 9.6.7.4 Actions

##### 9.6.7.4.1 CreateReplicas Description

This action shall create an on-demand replica that conforms to the bound DataProtectionLineOfService.

**Action URI:** {Base URI of target resource}/Actions/DataProtectionLineOfService.CreateReplicas

##### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.7.4.1. | Parameter Name | Type | Attributes | Notes | |:-|:-|:-|:-| | **ReplicaLineOfService** { object | *required* | The value shall reference the data protection line of service this operation is bound to. | | **@odata.id** | string | *read-only* | Link to another DataProtectionLineOfService resource. | | } | | | **ReplicaRequests** [ { | array | *optional* | Each value shall reference a source resource and provide a name for the replica. | | **ReplicaName** (v1.1+) | string | *read-write (null)* | The value shall be the names of the replica. | | **ReplicaSource** (v1.1+) { | object | | The value shall reference a resource to be replicated. | | **@odata.id** | string (URI) | *read-only* | The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification. | | } | | | } | | | Table: CreateReplicas action parameters

### 9.6.7.5 Property details

**9.6.7.5.1 RecoveryGeographicObjective:** The defined property values are listed in Table 61. The value specifies the geographic scope of the failure domain.

**Table 61:** RecoveryGeographicObjective property values #####

RecoveryTimeObjective:

string	Description
Datacenter	A facility that provides communication, power, or cooling infrastructure to a co-located set of servers, networking and storage.
Rack	A container within a datacenter that provides communication, power, or cooling to a set of components.
RackGroup	A set of racks that may share common communication, power, or cooling.
Region	A set of resources that are required to be either geographically or politically isolated from resources not in the resources.
Row	A set of adjacent racks or rackgroups that may share common communication, power, or cooling.
Server	Components of a CPU/memory complex that share the same infrastructure.

The defined property values are listed in Table 62. The value shall be an enumeration that indicates the maximum time required to access an alternate replica. In the case that `IsIsolated = false`, failure of the domain is not a consideration.

**Table 62:** RecoveryTimeObjective property values ##### ReplicaType:

string	Description
Nearline	Access to a replica shall be consistent with switching access to a different path through a different front-end interconnection infrastructure. Some inconsistency may occur. A restore step may be required before recovery can commence.

string	Description
Offline	Access to a replica may take a significant amount of time. No direct connection to the replica is assumed. Some inconsistency loss may occur. A restore step is likely to be required.
OnlineActive	Access to synchronous replicas shall be instantaneous.
OnlinePassive	Access to a synchronous replica shall be consistent with switching access to a different path the same front-end interconnect. A restore step shall not be required.

The defined property values are listed in Table 63. The type of replica shall conform to this value.

**Table 63:** ReplicaType property values

string	Description
Clone	This enumeration literal shall indicate that replication shall create a point in time, full copy the source.
Mirror	This enumeration literal shall indicate that replication shall create and maintain a copy of the source.
Snapshot	This enumeration literal shall indicate that replication shall create a point in time, virtual copy of the source.
T okenizedClone	This enumeration literal shall indicate that replication shall create a token based clone.

### 9.6.8 DataProtectionLoSCapabilities 1.2.0

**9.6.8.1 Description** The capabilities to protect data from loss by the use of a replica. The requirements shall be met collectively by the communication path and the replica. There should be one instance associated to a class of service for each replica. Each replica independently should have a class of service that describes its characteristics.

**9.6.8.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/DataProtection-LoSCapabilities

**9.6.8.3 Properties** The properties defined for the DataProtectionLoSCapabilities 1.2.0 schema are summarized in Table 64.

**Table 64:** DataProtectionLoSCapabilities 1.2.0 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>Actions</b> <i>(v1.1+)</i> <i>{}</i></li> </ul>	object		The Actions property shall contain the available actions for this resource.
<b>Description</b>	string	<i>read-only (null)</i>	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<ul style="list-style-type: none"> <li>• <b>Id</b> <i>{}</i></li> </ul>	string	<i>read-only required</i>	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Identifier</b> <i>{}</i>	object		The value shall be unique within the managed ecosystem. For property details, see Identifier v1.14.1).
<b>Links</b> <i>{}</i>	object		The value of this property shall contains links to other resources that are not contained in this resource.
<b>Oem</b> <i>{}</i>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

Property	Type	Attributes	Notes
<b>SupportedReplicaOptions</b> [{ @odata.id }] }	array		The collection shall contain known and supported replica Classes of Service.
<b>Name</b>	string	read-write required	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>SupportedLinesOfService</b> [{ @odata.id }]	array		The collection shall contain known and supported DataProtectionLinesOfService.
<b>SupportedMinLifetime</b> []	array (string, null)	read-write	The value of each entry shall be an ISO 8601 duration that specifies the minimum lifetime required for the replica.

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>array (string (enumerated))</li> </ul>	array (string (enumerated))	<ul style="list-style-type: none"> <li>The value of each entry shall specify a supported read-failure domain. <i>For the possible property values, see SupportedRecoveryGeographicObjectives in writeProperty details.</i></li> </ul>	<ul style="list-style-type: none"> <li>&lt;br&gt;{=html}(null)*</li> </ul>
<b>SupportedRecoveryPointObjectives</b> []	array (string, null)	read-write	<p>The value of each entry shall specify a supported ISO 8601 time interval defining the maximum source information that may be lost on failure. In the case that Isolated = false, failure of the domain is not a consideration.</p>
<b>SupportedRecoveryTimeObjectives</b> []	array (string (enumerated))	<ul style="list-style-type: none"> <li>The value of each entry shall specify an read-enumerated value that indicates a supported expectation for the time required to access an alternate replica. In the case that Isolated = false, failure of the domain is not a consideration. <i>For the possible property values, see SupportedRecoveryTimeObjectives in Property details.</i></li> </ul>	<ul style="list-style-type: none"> <li>&lt;br&gt;{=html}(null)*</li> </ul>

Property	Type	Attributes	Notes
<b>SupportedReplicaTypes</b> [ ]	array (string (enumeration))	<ul style="list-style-type: none"> <li>The value of each entry shall specify a supported read-replica type. <i>For the possible property values, see SupportedReplicaTypes in Property details.</i></li> </ul>	write  {=html}(null)*
<b>SupportedIsolated</b>	boolean	<ul style="list-style-type: none"> <li>A value of true shall indicate that allocating a read-replica in a separate fault domain is supported. The default value for this property is false.</li> </ul>	write (null)*

#### 9.6.8.4 Property details

**9.6.8.4.1 SupportedRecoveryGeographicObjectives:** The defined property values are listed in Table 65. The value of each entry shall specify a supported failure domain.

**Table 65:** SupportedRecoveryGeographicObjectives property values #####  
SupportedRecoveryTimeObjectives:

string	Description
Datacenter	A facility that provides communication, power, or cooling infrastructure to a co-located set of servers, networking and storage.
Rack	A container within a datacenter that provides communication, power, or cooling to a set of components.



string	Description
RackGroup	A set of racks that may share common communication, power, or cooling.
Region	A set of resources that are required to be either geographically or politically isolated from resources not in the resources.
Row	A set of adjacent racks or rackgroups that may share common communication, power, or cooling.
Server	Components of a CPU/memory complex that share the same infrastructure.

The defined property values are listed in Table 66. The value of each entry shall specify an enumerated value that indicates a supported expectation for the time required to access an alternate replica. In the case that `IsIsolated = false`, failure of the domain is not a consideration.

**Table 66:** SupportedRecoveryTimeObjectives property values #####

SupportedReplicaTypes:

string	Description
Nearline	Access to a replica shall be consistent with switching access to a different path through a different front-end interconnection infrastructure. Some inconsistency may occur. A restore step may be required before recovery can commence.
Offline	Access to a replica may take a significant amount of time. No direct connection to the replica is assumed. Some inconsistency loss may occur. A restore step is likely to be required.
OnlineActive	Access to synchronous replicas shall be instantaneous.
OnlinePassive	Access to a synchronous replica shall be consistent with switching access to a different path the same front-end interconnect. A restore step shall not be required.

The defined property values are listed in Table 67. The value of each entry shall specify a supported replica type.

**Table 67:** SupportedReplicaTypes property values

string	Description
Clone	This enumeration literal shall indicate that replication shall create a point in time, full copy the source.
Mirror	This enumeration literal shall indicate that replication shall create and maintain a copy of the source.
Snapshot	This enumeration literal shall indicate that replication shall create a point in time, virtual copy of the source.
TokenizedClone	This enumeration literal shall indicate that replication shall create a token based clone.

#### 9.6.9 DataSecurityLineOfService 1.1.1

**9.6.9.1 Description** This structure shall be used to describe data security service level requirements.

**9.6.9.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/DataSecurityLinesOfService/{DataSecurityLineOfServiceId} /redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/DataSecurityLinesOfService/{DataSecurityLineOfServiceId}

**9.6.9.3 Properties** The properties defined for the DataSecurityLineOfService 1.1.1 schema are summarized in Table 68.

**Table 68:** DataSecurityLineOfService 1.1.1 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>actions</b> (array of string)</li> </ul>	object		The Actions property shall contain the available actions for this resource.
<b>AntiVirusEngineProvider</b>	string	<ul style="list-style-type: none"> <li>• read-write (nullable)*</li> </ul>	The value shall specify an AntiVirus provider.
<b>AntiVirusScanPolicies []</b>	array (string (enumeration))	<ul style="list-style-type: none"> <li>• read-write (nullable)*</li> </ul>	The enumeration literal shall specify the policy for triggering an AntiVirus scan. <i>For the possible property values, see AntivirusScanPolicies in writeProperty details.</i>
<b>ChannelEncryptionStrength</b>	string (enumeration)	<ul style="list-style-type: none"> <li>• read-write (nullable)*</li> </ul>	The enumeration literal shall specify a key size in a symmetric encryption algorithm for transport channel encryption. <i>For the possible property values, see ChannelEncryptionStrength in writeProperty details.</i>

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <code>string (Dataenum)</code> SanitizationPolicy**</li> </ul>		<ul style="list-style-type: none"> <li>• The enumeration literal shall specify the data read-sanitization policy. <i>For the possible property values, see DataSanitizationPolicy in Property details.</i> &lt;br&gt;={html}(null)*</li> </ul>	
<b>Description</b>	<code>string</code>	<i>read-only (null)</i>	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<ul style="list-style-type: none"> <li>• <code>string (Hostenum)</code> AuthenticationType**</li> </ul>		<ul style="list-style-type: none"> <li>• The enumeration literal shall specify the read-authentication type for hosts (servers) or initiator endpoints. <i>For the possible property values, see HostAuthenticationType in Property details.</i> &lt;br&gt;={html}(null)*</li> </ul>	
	<code>string</code> *Id**	<i>read-only required</i>	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Media Encryption Strength</b>	<code>string (enum)</code>	<ul style="list-style-type: none"> <li>• The enumeration literal shall specify a key size in read-a symmetric encryption algorithm for media encryption. <i>For the possible property values, see MediaEncryptionStrength in Property details.</i> &lt;br&gt;={html}(null)*</li> </ul>	

Property	Type	Attributes	Notes
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>SecureChannelProtocol</b>	string (enum)	<ul style="list-style-type: none"> <li>The enumeration literal shall specify the read-protocol that provide encrypted communication. <i>For the possible property values, see writeSecureChannelProtocol in Property details.</i></li> </ul>	  {=html}(null)*
	<ul style="list-style-type: none"> <li>string (*Userenum) AuthenticationType**</li> </ul>	<ul style="list-style-type: none"> <li>The enumeration literal shall specify the read-authentication type for users (or programs). <i>For the possible property values, see writeUserAuthenticationType in Property details.</i></li> </ul>	  {=html}(null)*

#### 9.6.9.4 Property details

**9.6.9.4.1 AntivirusScanPolicies:** The defined property values are listed in Table 69. The enumeration literal shall specify the policy for triggering an AntiVirus scan.

**Table 69:** AntivirusScanPolicies property values ##### ChannelEncryptionStrength:

string	Description
None	This enumeration literal specifies No trigger.
OnFirstRead	This enumeration literal specifies to trigger on first read.
OnPatternUpdate	This enumeration literal specifies to trigger on antivirus pattern file update.
OnRename	This enumeration literal specifies to trigger on object rename.
OnUpdate	This enumeration literal specifies to trigger on object update.

The defined property values are listed in Table 70. The enumeration literal shall specify a key size in a symmetric encryption algorithm for transport channel encryption.

**Table 70:** ChannelEncryptionStrength property values ##### DataSanitizationPolicy:

string	Description
Bits_0	This enumeration literal specifies that there is no key.
Bits_112	This enumeration literal specifies a 3DES 112 bit key.
Bits_128	This enumeration literal specifies an AES 128 bit key.
Bits_192	This enumeration literal specifies an AES 192 bit key.
Bits_256	This enumeration literal specifies an AES 256 bit key.

The defined property values are listed in Table 71. The enumeration literal shall specify the data sanitization policy.

**Table 71:** DataSanitizationPolicy property values ##### HostAuthenticationType:

string	Description
Clear	This enumeration literal specifies to sanitize data in all user-addressable storage locations for protection against simple non-invasive data recovery techniques.

string	Description
CryptographicErase	This enumeration literal specifies to leverages the encryption of target data by enabling sanitization of the target data's encryption key. This leaves only the ciphertext remaining on the media, effectively sanitizing the data by preventing read-access. For more information, see NIST800-88 and ISO/IEC 27040.
None	This enumeration literal specifies no sanitization.

The defined property values are listed in Table 72. The enumeration literal shall specify the authentication type for hosts (servers) or initiator endpoints.

**Table 72:** HostAuthenticationType property values ##### MediaEncryptionStrength:

string	Description
None	This enumeration literal specifies No authentication.
Password	This enumeration literal specifies Password/shared-secret: Absent an distributed authentication infrastructure, this is what is typically done.
PKI	This enumeration literal specifies a Public Key Infrastructure. Customers with the highest assurance requirements roll PKI out to hosts and users (it is more common for hosts than users. User PKI-based authentication has significant operational complications and administrative overheads, e.g., smart cards may be involved.
Ticket	This enumeration literal specifies Ticket-based (e.g., Kerberos): This is the most common class of authentication infrastructure used in enterprises. Kerberos is the best known example, and Windows usage of that via Active Directory is so widely deployed as to be a de facto standard. In other areas (e.g., academia) there are comparable ticket-based systems.

The defined property values are listed in Table 73. The enumeration literal shall specify a key size in a symmetric encryption algorithm for media encryption.

**Table 73:** MediaEncryptionStrength property values ##### SecureChannelProtocol:

string	Description
Bits_0	This enumeration literal specifies that there is no key.
Bits_112	This enumeration literal specifies a 3DES 112 bit key.
Bits_128	This enumeration literal specifies an AES 128 bit key.
Bits_192	This enumeration literal specifies an AES 192 bit key.
Bits_256	This enumeration literal specifies an AES 256 bit key.

The defined property values are listed in Table 74. The enumeration literal shall specify the protocol that provide encrypted communication.

**Table 74:** SecureChannelProtocol property values ##### UserAuthenticationType:

string	Description
IPsec	This enumeration literal specifies Internet Protocol Security (IPsec), as defined by IETF RFC 2401.
None	This enumeration literal specifies no encryption.
RPCSEC_GSS	This enumeration literal specifies RPC access to the Generic Security Services Application Programming Interface (GSS-API), as defined by IETF RPC 2203.
TLS	This enumeration literal specifies Transport Layer Security (TLS), as defined by IETF RFC 5246.

The defined property values are listed in Table 75. The enumeration literal shall specify the authentication type for users (or programs).

**Table 75:** UserAuthenticationType property values

string	Description
None	This enumeration literal specifies No authentication.



---

string	Description
Password	This enumeration literal specifies Password/shared-secret: Absent an distributed authentication infrastructure, this is what is typically done.
PKI	This enumeration literal specifies a Public Key Infrastructure. Customers with the highest assurance requirements roll PKI out to hosts and users (it is more common for hosts than users. User PKI-based authentication has significant operational complications and administrative overheads, e.g., smart cards may be involved.
Ticket	This enumeration literal specifies Ticket-based (e.g., Kerberos): This is the most common class of authentication infrastructure used in enterprises. Kerberos is the best known example, and Windows usage of that via Active Directory is so widely deployed as to be a de facto standard. In other areas (e.g., academia) there are comparable ticket-based systems.

---

#### 9.6.10 DataSecurityLoSCapabilities 1.2.0

**9.6.10.1 Description** This resource may be used to describe data security capabilities.

**9.6.10.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/DataSecurity-LoSCapabilities

**9.6.10.3 Properties** The properties defined for the DataSecurityLoSCapabilities 1.2.0 schema are summarized in Table 76.

**Table 76:** DataSecurityLoSCapabilities 1.2.0 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>Actions</b> <sup>**</sup> (v1.1+) {}</li> </ul>	object		The Actions property shall contain the available actions for this resource.
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<ul style="list-style-type: none"> <li>• <b>Id</b> <sup>**</sup></li> </ul>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Identifier</b> {}	object		The value identifies this resource. The value shall be unique within the managed ecosystem. For property details, see Identifier v1.14.1).
<b>Name</b>	string	read-only required	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.

Property	Type	Attributes	Notes
<b>SupportedAntivirusEngineProviders []</b>	array (string, null)	<i>read-write</i>	The entry values shall specify supported AntiVirus providers.
<b>SupportedAntivirusScanPolicies []</b>	array (string (enum))	•	The enumeration literal shall specify supported read-policies that trigger an AntiVirus scan. <i>For the possible property values, see writeSupportedAntivirusScanPolicies in Property details.</i>
<b>SupportedChannelEncryptionStrengths []</b>	array (string (enum))	•	The enumeration literal shall specify supported read-key sizes in a symmetric encryption algorithm (AES) for transport channel encryption. <i>For the possible property values, see writeSupportedChannelEncryptionStrengths in Property details.</i>
<b>SupportedDataSanitizationPolicies []</b>	array (string (enum))	•	The enumeration literal shall specify supported read-data sanitization policies. <i>For the possible property values, see writeSupportedDataSanitizationPolicies in Property details.</i>

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>array (string (enumeration types** [ ]</li> </ul>	array (string (enumeration types** [ ]	<ul style="list-style-type: none"> <li>The enumeration literal shall specify supported read-authentication types for hosts (servers) or initiator endpoints. <i>For the possible property values, see SupportedHostAuthenticationTypes in Property details.</i></li> </ul>	
<b>SupportedLinesOfService</b> <b>@odata.id</b> [ ]	array  string	read-write Link to a DataSecurityLineOfService resource. See the Links section and the <i>DataSecurityLineOfService</i> schema for details.	The collection shall contain supported DataSecurity service options.
<b>SupportedMediaEncryptionStrengths</b> [ ]	array (string (enumeration types** [ ]	<ul style="list-style-type: none"> <li>The enumeration literal shall specify supported read-key sizes in a symmetric encryption algorithm (AES) for media encryption. <i>For the possible property values, see SupportedMediaEncryptionStrengths in Property details.</i></li> </ul>	

Property	Type	Attributes	Notes
<b>SupportedSecureChannelProtocols</b> []	array (string (enumeration))	<ul style="list-style-type: none"> <li>The enumeration literal shall specify supported read-protocols that provide encrypted communication. <i>For the possible property values, see SupportedSecureChannelProtocols in Property details.</i></li> </ul>	
<b>SupportedUserAuthenticationTypes</b> []	array (string (enumeration))	<ul style="list-style-type: none"> <li>The enumeration literal shall specify supported read-authentication types for users (or programs). <i>For the possible property values, see SupportedUserAuthenticationTypes in Property details.</i></li> </ul>	

#### 9.6.10.4 Property details

**9.6.10.4.1 SupportedAntivirusScanPolicies:** The defined property values are listed in Table 77. The enumeration literal shall specify supported policies that trigger an AntiVirus scan.

**Table 77:** SupportedAntivirusScanPolicies property values #####

SupportedChannelEncryptionStrengths:

string	Description
None	This enumeration literal specifies No trigger.
OnFirstRead	This enumeration literal specifies to trigger on first read.

string	Description
On PatternUpdate	This enumeration literal specifies to trigger on antivirus pattern file update.
OnRename	This enumeration literal specifies to trigger on object rename.
OnUpdate	This enumeration literal specifies to trigger on object update.

The defined property values are listed in Table 78. The enumeration literal shall specify supported key sizes in a symmetric encryption algorithm (AES) for transport channel encryption.

**Table 78:** SupportedChannelEncryptionStrengths property values #####  
SupportedDataSanitizationPolicies:

string	Description
Bits_0	This enumeration literal specifies that there is no key.
Bits_112	This enumeration literal specifies a 3DES 112 bit key.
Bits_128	This enumeration literal specifies an AES 128 bit key.
Bits_192	This enumeration literal specifies an AES 192 bit key.
Bits_256	This enumeration literal specifies an AES 256 bit key.

The defined property values are listed in Table 79. The enumeration literal shall specify supported data sanitization policies.

**Table 79:** SupportedDataSanitizationPolicies property values #####  
SupportedHostAuthenticationTypes:

string	Description
Clear	This enumeration literal specifies to sanitize data in all user-addressable storage locations for protection against simple non-invasive data recovery techniques.

string	Description
CryptographicErase	This enumeration literal specifies to leverages the encryption of target data by enabling sanitization of the target data's encryption key. This leaves only the ciphertext remaining on the media, effectively sanitizing the data by preventing read-access. For more information, see NIST800-88 and ISO/IEC 27040.
None	This enumeration literal specifies no sanitization.

The defined property values are listed in Table 80. The enumeration literal shall specify supported authentication types for hosts (servers) or initiator endpoints.

**Table 80:** SupportedHostAuthenticationTypes property values #####  
SupportedMediaEncryptionStrengths:

string	Description
None	This enumeration literal specifies No authentication.
Password	This enumeration literal specifies Password/shared-secret: Absent an distributed authentication infrastructure, this is what is typically done.
PKI	This enumeration literal specifies a Public Key Infrastructure. Customers with the highest assurance requirements roll PKI out to hosts and users (it is more common for hosts than users. User PKI-based authentication has significant operational complications and administrative overheads, e.g., smart cards may be involved.
Ticket	This enumeration literal specifies Ticket-based (e.g., Kerberos): This is the most common class of authentication infrastructure used in enterprises. Kerberos is the best known example, and Windows usage of that via Active Directory is so widely deployed as to be a de facto standard. In other areas (e.g., academia) there are comparable ticket-based systems.

The defined property values are listed in Table 81. The enumeration literal shall specify supported key sizes in a symmetric encryption algorithm (AES) for media encryption.

**Table 81:** SupportedMediaEncryptionStrengths property values #####

SupportedSecureChannelProtocols:

string	Description
Bits_0	This enumeration literal specifies that there is no key.
Bits_112	This enumeration literal specifies a 3DES 112 bit key.
Bits_128	This enumeration literal specifies an AES 128 bit key.
Bits_192	This enumeration literal specifies an AES 192 bit key.
Bits_256	This enumeration literal specifies an AES 256 bit key.

The defined property values are listed in Table 82. The enumeration literal shall specify supported protocols that provide encrypted communication.

**Table 82:** SupportedSecureChannelProtocols property values #####

SupportedUserAuthenticationTypes:

string	Description
IPsec	This enumeration literal specifies Internet Protocol Security (IPsec), as defined by IETF RFC 2401.
None	This enumeration literal specifies no encryption.
RPCSEC_GSS	This enumeration literal specifies RPC access to the Generic Security Services Application Programming Interface (GSS-API), as defined by IETF RPC 2203.
TLS	This enumeration literal specifies Transport Layer Security (TLS), as defined by IETF RFC 5246.

The defined property values are listed in Table 83. The enumeration literal shall specify supported authentication types for users (or programs).



**Table 83:** SupportedUserAuthenticationTypes property values

string	Description
None	This enumeration literal specifies No authentication.
Password	This enumeration literal specifies Password/shared-secret: Absent an distributed authentication infrastructure, this is what is typically done.
PKI	This enumeration literal specifies a Public Key Infrastructure. Customers with the highest assurance requirements roll PKI out to hosts and users (it is more common for hosts than users. User PKI-based authentication has significant operational complications and administrative overheads, e.g., smart cards may be involved.
Ticket	This enumeration literal specifies Ticket-based (e.g., Kerberos): This is the most common class of authentication infrastructure used in enterprises. Kerberos is the best known example, and Windows usage of that via Active Directory is so widely deployed as to be a de facto standard. In other areas (e.g., academia) there are comparable ticket-based systems.

#### 9.6.11 DataStorageLineOfService 1.3.1

**9.6.11.1 Description** This structure may be used to describe a service option covering storage provisioning and availability.

**9.6.11.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/DataStorageLinesOfService/{DataStorageLineOfServiceId} /redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/DataStorageLinesOfService/{DataStorageLineOfServiceId}

**9.6.11.3 Properties** The properties defined for the DataStorageLineOfService 1.3.1 schema are summarized in Table 84.

**Table 84:** DataStorageLineOfService 1.3.1 properties

Property	Type	Attributes	Notes
<b>AccessCapabilities</b> (v1.1+) [ ]	array (string (enumeration))	<ul style="list-style-type: none"> <li>Each entry specifies a required storage access read-capability. <i>For the possible property values, see AccessCapabilities in Property details.</i></li> <li>write &lt;br&gt;{=html}(null)*</li> </ul>	
<b>Actions</b> (v1.3+) [ ]	object		The Actions property shall contain the available actions for this resource.
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Id</b>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>IsSpaceEfficient</b>	boolean	<ul style="list-style-type: none"> <li>A value of true shall indicate that the storage is read-compressed or deduplicated. The default value for this property is false.</li> <li>write (null)*</li> </ul>	

Property	Type	Attributes	Notes
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>ProvisioningPolicy</b>	string (enum)	<ul style="list-style-type: none"> <li>The enumeration literal shall define the read-provisioning policy for storage. <i>For the possible property values, see ProvisioningPolicy in writeProperty details.</i></li> </ul>	 {=html}(nnull)*
<b>RecoverableCapacitySourceCount</b> (v1.2+)	integer	<ul style="list-style-type: none"> <li>The value is minimum required number of read-available capacity source resources that shall be available in the event that an equivalent writecapacity source resource fails. It is assumed that (n drives and memory components can be null)* replaced, repaired or otherwise added to increase an associated resource's RecoverableCapacitySourceCount.</li> </ul>	
	string (enum)	<ul style="list-style-type: none"> <li>The enumeration literal specifies the time after a read-disaster that the client shall regain conformant service level access to the primary store, typical values are 'immediate' or 'offline'. The expectation is that the services required to implement this capability are part of the advertising system. <i>For the possible property values, see RecoveryTimeObjectives in Property details.</i></li> </ul>	 {=html}(nnull)*

#### 9.6.11.4 Property details

**9.6.11.4.1 AccessCapabilities:** The defined property values are listed in Table 85. Each entry specifies a required storage access capability.

**Table 85:** AccessCapabilities property values ##### ProvisioningPolicy:

string	Description
Append	This enumeration literal shall indicate that the storage may be written only to append.
Execute	This value shall indicate that Execute access is allowed by the file share.
Read	This enumeration literal shall indicate that the storage may be read.
Streaming	This enumeration literal shall indicate that the storage may be read sequentially.
Write	This enumeration literal shall indicate that the storage may be written multiple times.
WriteOnce	This enumeration literal shall indicate that the storage may be written only once.

The defined property values are listed in Table 86. The enumeration literal shall define the provisioning policy for storage.

**Table 86:** ProvisioningPolicy property values ##### RecoveryTimeObjectives:

string	Description
Fixed	This enumeration literal specifies storage shall be fully allocated.
Thin	This enumeration literal specifies storage may be over allocated.

The defined property values are listed in Table 87. The enumeration literal specifies the time after a disaster that the client shall regain conformant service level access to

the primary store, typical values are 'immediate' or 'offline'. The expectation is that the services required to implement this capability are part of the advertising system.

**Table 87:** RecoveryTimeObjectives property values

string	Description
Nearline	Access to a replica shall be consistent with switching access to a different path through a different front-end interconnection infrastructure. Some inconsistency may occur. A restore step may be required before recovery can commence.
Offline	Access to a replica may take a significant amount of time. No direct connection to the replica is assumed. Some inconsistency loss may occur. A restore step is likely to be required.
OnlineActive	Access to synchronous replicas shall be instantaneous.
OnlinePassive	Access to a synchronous replica shall be consistent with switching access to a different path the same front-end interconnect. A restore step shall not be required.

#### 9.6.12 DataStorageLoSCapabilities 1.2.2

**9.6.12.1 Description** Each instance of DataStorageLoSCapabilities describes capabilities of the system to support various data storage service options.

**9.6.12.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/DataStorageLoSCapabilities

**9.6.12.3 Properties** The properties defined for the DataStorageLoSCapabilities 1.2.2 schema are summarized in Table 88.

**Table 88:** DataStorageLoSCapabilities 1.2.2 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"><li>• <b>Actions</b> *Actions** (v1.1+) {}</li></ul>	object		The Actions property shall contain the available actions for this resource.
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the ‘Description’ clause of the Redfish Specification.
<ul style="list-style-type: none"><li>• <b>Id</b> *Id**</li></ul>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the ‘Id’ clause of the Redfish Specification.
<b>Identifier</b> {}	object		The value shall be unique within the managed ecosystem. For property details, see Identifier v1.14.1).
<ul style="list-style-type: none"><li>• <b>MaximumRecoverableCapacitySourceCount</b> *MaximumRecoverableCapacitySourceCount** (v1.2+)</li></ul>	integer	<ul style="list-style-type: none"><li>• The maximum number of capacity source read-resources that can be supported for the purpose of recovery when in the event that an equivalent writecapacity source resource fails. (null)*</li></ul>	

Property	Type	Attributes	Notes
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<ul style="list-style-type: none"> <li>SupportedAccessCapabilities** []</li> </ul>	array (string (enumerated))	<ul style="list-style-type: none"> <li>Each entry specifies a storage access capability. <i>For the possible property values, see SupportedAccessCapabilities in Property details.</i></li> </ul>	
<b>SupportedLinesOfService</b>	array		The collection shall contain known and supported DataStorageLinesOfService.
<b>@odata.id</b>	string	<i>read-write</i>	Link to a DataStorageLineOfService resource. See the Links section and the <i>DataStorageLineOfService</i> schema for details.
<b>{}</b>			

Property	Type	Attributes	Notes
<b>SupportedProvisioningPolicies []</b>	array (string (enum))	•	This collection specifies supported storage read-allocation policies. <i>For the possible property values, see <a href="#">SupportedProvisioningPolicies</a> in <a href="#">writeProperty</a> details.</i>  {=html}(null)*
<b>SupportedRecoveryTimeObjectives []</b>	array (string (enum))	•	This collection specifies supported expectations read-for time to access the primary store after recovery. <i>For the possible property values, see <a href="#">writeSupportedRecoveryTimeObjectives</a> in <a href="#">Property</a> details.</i>  {=html}(null)*
<b>SupportsSpaceEfficiency</b>	boolean	•	The value specifies whether storage read-compression or deduplication is supported. The default value for this property is false. write (null)*

#### 9.6.12.4 Property details

**9.6.12.4.1 SupportedAccessCapabilities:** The defined property values are listed in Table 89. Each entry specifies a storage access capability.



**Table 89:** SupportedAccessCapabilities property values #####

SupportedProvisioningPolicies:

string	Description
Append	This enumeration literal shall indicate that the storage may be written only to append.
Execute	This value shall indicate that Execute access is allowed by the file share.
Read	This enumeration literal shall indicate that the storage may be read.
Streaming	This enumeration literal shall indicate that the storage may be read sequentially.
Write	This enumeration literal shall indicate that the storage may be written multiple times.
WriteOnce	This enumeration literal shall indicate that the storage may be written only once.

The defined property values are listed in Table 90. This collection specifies supported storage allocation policies.

**Table 90:** SupportedProvisioningPolicies property values #####

SupportedRecoveryTimeObjectives:

string	Description
Fixed	This enumeration literal specifies storage shall be fully allocated.
Thin	This enumeration literal specifies storage may be over allocated.

The defined property values are listed in Table 91. This collection specifies supported expectations for time to access the primary store after recovery.

**Table 91:** SupportedRecoveryTimeObjectives property values

string	Description
Nearline	Access to a replica shall be consistent with switching access to a different path through a different front-end interconnection infrastructure. Some inconsistency may occur. A restore step may be required before recovery can commence.
Offline	Access to a replica may take a significant amount of time. No direct connection to the replica is assumed. Some inconsistency loss may occur. A restore step is likely to be required.
OnlineActive	Access to synchronous replicas shall be instantaneous.
OnlinePassive	Access to a synchronous replica shall be consistent with switching access to a different path the same front-end interconnect. A restore step shall not be required.

### 9.6.13 FeaturesRegistry 1.1.1

**9.6.13.1 Description** This resource shall be used to represent a Feature registry for a Redfish implementation.

**9.6.13.2 Properties** The properties defined for the FeaturesRegistry 1.1.1 schema are summarized in Table 92.

**Table 92:** FeaturesRegistry 1.1.1 properties

Property	Type	Attributes	Notes
Actions	object		The Actions property shall contain the available actions for this resource.

Property	Type	Attributes	Notes
<b>Description</b>	string	<i>read-only (nullable)</i>	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Features [ {</b>	array	<i>* required*</i>	The pattern property shall represent the suffix to be used in the FeatureId and shall be unique within this message registry.
<b>ConfigurationProfileDefinition</b>	string	<i>read-only required (nullable)</i>	If present, the value shall define a profile definition that contains the named profile declaration.
<b>Description</b>	string	<i>read-only required (nullable)</i>	The value shall be a detailed description of the feature.
<b>FeatureName</b>	string	<i>read-only required (nullable)</i>	The value shall be the unique name of the feature prefixed by the defining organization separated by a period (e.g. 'vendor.feature').
<b>Version**</b>	string	<i>read-only required (nullable)</i>	The value shall uniquely identify the version of the feature, using the major.minor.errata format.
<b>Id**</b>	string	<i>read-only required</i>	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.

Property	Type	Attributes	Notes
<b>Language</b>	string	<i>read-only required</i>	The value of this property shall be a string consisting of an RFC 5646 language code.
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
• <b>*OwnershipEntity**</b>	string	<i>read-only required</i>	The value of this property shall be a string that represents the publisher of this registry.
<b>RegistryPrefix</b>	string	<i>read-only required</i>	The value of this property shall be the prefix used in IDs which uniquely identifies all of the Features in this registry as belonging to this registry.
<b>RegistryVersion</b>	string	<i>read-only required</i>	The value of this property shall be the version of this message registry. The format of this string shall be of the format majorversion.minorversion.errata.

#### 9.6.14 FileShare 1.2.0

**9.6.14.1 Description** This resource shall be used to represent a shared set of files with a common directory structure.

**9.6.14.2 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemsId}/ExportedFileShares/{ExportedFileSharesId} /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemsId}/ExportedFileShares/{ExportedFileSharesId} /redfish/v1/Systems/{ComputerSystemsId}/Storage/{StorageId}/FileSystems/{FileSystemsId}/ExportedFileShares/{ExportedFileSharesId}

**9.6.14.3 Properties** The properties defined for the FileShare 1.2.0 schema are summarized in Table 93.

**Table 93:** FileShare 1.2.0 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>actions</li> </ul>	object		The Actions property shall contain the available actions for this resource.
<b>CAS supported</b>	boolean	<ul style="list-style-type: none"> <li></li> </ul>	<ul style="list-style-type: none"> <li>The value of this property shall indicate that read-Continuous Availability is supported. Client/Server mediated recovery from network write and server failure with application transparency. (n This property shall be NULL unless the ull)* FileSharingProtocols property includes SMB. The default value for this property is false.</li> </ul>
<b>Default Access Capabilities</b>	array of strings	read-only	The value of this property shall be an array containing entries for the default access capabilities for the file share. Each entry shall specify a default access privilege. The types of default access can include Read, Write, and/or Execute. <i>For the possible property values, see DefaultAccessCapabilities in Property details.</i>

Property	Type	Attributes	Notes
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>EthernetInterfaces</b>	object		The value shall be a link to an EthernetInterfaceCollection with members that provide access to the file share.
<b>@odata.id</b>	string (URI)	<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul>	
<b>ExecuteSupport</b>	boolean	read-only (null)	The value of this property shall indicate whether Execute access is supported by the file share. The default value for this property is false.
<b>FileSharePath</b>	string	read-only (null)	The value of this property shall be a path (relative to the file system root) to the exported file or directory on the file system where this file share is hosted.
<b>FileShareQuotaType</b>	string (enum)	<ul style="list-style-type: none"> <li>If FileShareQuotaType is present, a value of Soft shall specify that quotas are not enforced, and a value of Hard shall specify that writes shall fail if the space consumed would exceed the value of the FileShareTotalQuotaBytes property. For the possible property values, see FileShareQuotaType in Property details.</li> </ul>	

Property	Type	Attributes	Notes
<b>FileShareRemainingQuotaBytes</b>	integer (By)	read-only  ={html}(null)	If present, the value of this property shall indicate the remaining number of bytes that may be consumed by this file share.
<b>FileShareTotalQuotaBytes</b>	integer (By)	<ul style="list-style-type: none"> <li>If present, the value of this property shall read-indicate the maximum number of bytes that may be consumed by this file share.</li> </ul> write  ={html}(null)*	
<b>FileSharingProtocols []</b>	array (string (enumeration))	read-only  ={html}(null)	This property shall be an array containing entries for the file sharing protocols supported by this file share. Each entry shall specify a file sharing protocol supported by the file system. <i>For the possible property values, see FileSharingProtocols in Property details.</i>
<b>*Id**</b>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Links {</b>	object		The Links property, as described by the Redfish Specification, shall contain references to resources that are related to, but not contained by (subordinate to), this resource.
<b>ClassOfService {</b>	object		This value shall be a link to the ClassOfService for this file share. See the <i>ClassOfService</i> schema for details on this property.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string		<ul style="list-style-type: none"> <li>Link to a <i>ClassOfService</i> resource. See the Links read-section and the <i>ClassOfService</i> schema for details.</li> </ul> <p>only*</p>
<b>Filesystem {</b>	object		The value shall be a link to the file system containing the file share. See the <i>FileSystem</i> schema for details on this property.
<b>@odata.id</b>	string		<ul style="list-style-type: none"> <li>Link to a <i>FileSystem</i> resource. See the Links read-section and the <i>FileSystem</i> schema for details.</li> </ul> <p>only*</p>
<b>Oem {</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see <i>Oem</i> .
<b>LowSpaceWarningThresholds**</b>	array of integers (integers, non-null)	read-write	<p>This property shall be an array containing entries for the percentages of file share capacity at which low space warning events are to be issued. A <i>LOW_SPACE_THRESHOLD_WARNING</i> event shall be triggered each time the remaining file share capacity value becomes less than one of the values in the array. The following shall be true: Across all <i>CapacitySources</i> entries, percent = (SUM(AllocatedBytes) - SUM(ConsumedBytes))/SUM(AllocatedBytes).</p>



Property	Type	Attributes	Notes
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>RemainingCapacityPercent (v1.1+)</b>	integer	<i>read-only (null)</i>	If present, this value shall return $\{[(\text{SUM}(\text{AllocatedBytes}) - \text{SUM}(\text{ConsumedBytes}))/\text{SUM}(\text{AllocatedBytes})]*100$ represented as an integer value.
<b>RootAccess</b>	boolean	<i>read-only (null)</i>	The value of this property shall indicate whether Root access is allowed by the file share. The default value for this property is false.
<b>Status {}</b>	object		This value of this property shall indicate the status of the file share. For property details, see Status.
<b>WritePolicy</b>	string (enum)	<i>read-only</i> <i>&lt;br&gt;{=html}{null}</i>	The value of this property shall define how writes are replicated to the shared source. <i>For the possible property values, see WritePolicy in Property details.</i>

#### 9.6.14.4 Property details

**9.6.14.4.1 DefaultAccessCapabilities:** The defined property values are listed in Table 94. The value of this property shall be an array containing entries for the default access capabilities for the file share. Each entry shall specify a default access privilege.

The types of default access can include Read, Write, and/or Execute.

**Table 94:** DefaultAccessCapabilities property values ##### FileShareQuotaType:

string	Description
Append	This enumeration literal shall indicate that the storage may be written only to append.
Execute	This value shall indicate that Execute access is allowed by the file share.
Read	This enumeration literal shall indicate that the storage may be read.
Streaming	This enumeration literal shall indicate that the storage may be read sequentially.
Write	This enumeration literal shall indicate that the storage may be written multiple times.
WriteOnce	This enumeration literal shall indicate that the storage may be written only once.

The defined property values are listed in Table 95. If FileShareQuotaType is present, a value of Soft shall specify that quotas are not enforced, and a value of Hard shall specify that writes shall fail if the space consumed would exceed the value of the FileShareTotalQuotaBytes property.

**Table 95:** FileShareQuotaType property values ##### FileSharingProtocols:

string	Description
Hard	This value shall indicate that quotas are enabled and enforced.
Soft	This value shall indicate that quotas are enabled but not enforced.

The defined property values are listed in Table 96. This property shall be an array containing entries for the file sharing protocols supported by this file share. Each entry shall specify a file sharing protocol supported by the file system.

**Table 96:** FileSharingProtocols property values ##### WritePolicy:

string	Description
NFSv3	This value shall indicate that NFSv3, as defined in RFC 1813, is supported by the file system.
NFSv4_0	This value shall indicate that NFSv4, as defined in RFC 7530, is supported by the file system.
NFSv4_1	This value shall indicate that NFSv4.1, as defined in RFC 5661, is supported by the file system.
SMBv2_0	This value shall indicate that Server Message Block version 2.0 is supported by the file system.
SMBv2_1	This value shall indicate that Server Message Block version 2.1 is supported by the file system.
SMBv3_0	This value shall indicate that Server Message Block version 3.0 is supported by the file system.
SMBv3_0_2	This value shall indicate that Server Message Block version 3.0.2 is supported by the file system.
SMBv3_1_1	This value shall indicate that Server Message Block version 3.1.1 is supported by the file system.

The defined property values are listed in Table 97. The value of this property shall define how writes are replicated to the shared source.

**Table 97:** WritePolicy property values

string	Description
Active	This enumeration literal shall indicate Active-Active (i.e. bidirectional) synchronous updates.
Adaptive	This enumeration literal shall indicate that an implementation may switch between synchronous and asynchronous modes.
Asynchronous	This enumeration literal shall indicate Asynchronous updates.
Synchronous	This enumeration literal shall indicate Synchronous updates.

### 9.6.15 FileShareCollection

**9.6.15.1 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/ExportedFileShares /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/ExportedFileShares

**9.6.15.2 Properties** The properties defined for the FileShareCollection schema are summarized in Table 98.

**Table 98:** FileShareCollection properties

Property	Type	Attributes	Notes
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Members</b>	array		This property shall contain references to the members of this FileSystem collection.
<b>@odata.id</b>	string		Link to a FileShare resource. See the Links read-section and the <i>FileShare</i> schema for details.
<b>Members@odata.nextLink</b>	string (URI)		The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members.

Property	Type	Attributes	Notes
<b>Name</b>	string	•	This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish only*Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

### 9.6.16 FileSystem 1.2.2

**9.6.16.1 Description** This resource shall be used to represent an instance of a hierarchical namespace of files.

**9.6.16.2 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId} /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}

**9.6.16.3 Properties** The properties defined for the FileSystem 1.2.2 schema are summarized in Table 99.

**Table 99:** FileSystem 1.2.2 properties

Property	Type	Attributes	Notes
<b>AccessCapabilities</b> []	array (string (enumeration))	<ul style="list-style-type: none"> <li>read-write-capability</li> </ul>	<p>This property shall be an array containing read-entries for the supported IO access capabilities. Each entry shall specify a current storage access capability. <i>For the possible property values, see <a href="#">AccessCapabilities in Property details</a>.</i></p>
<b>Actions</b> { *Action *Action** (v1 .1+) }	object		The Actions property shall contain the available actions for this resource.
<b>BlockSizeBytes</b> tes	integer (By)	read-only	The value of this property shall be the block size of the file system in bytes.
<b>Capacity</b> {}	object		The value of this property shall be the capacity allocated to the file system in bytes. For property details, see Capacity v1.0.0).
<b>CapacitySources</b> [{ @odata.id } ] }]	array (string)	read-write	<p>This property shall be an array containing entries for all the capacity sources for the file system. Each entry shall provide capacity allocation information from a named resource.</p> <p>Link to a CapacitySource resource. See the Links section and the <i>CapacitySource</i> schema for details.</p>

Property	Type	Attributes	Notes
<b>CasePreserved</b>	boolean	•	This property shall indicate that the case of file read-names is preserved by the file system. A value of True shall indicate that case of file names shall be preserved. (null)*
<b>CaseSensitive</b>	boolean	•	This property shall indicate that case sensitive read-file names are supported by the file system. A value of True shall indicate that file names are case sensitive. (null)*
<b>CharacterCodeSet []</b>	array (string (enum))	•	This property shall be an array containing read-entries for the character sets or encodings supported by the file system. Each entry shall specify a character set encoding supported by the file system. <i>For the possible property values, see CharacterCodeSet in Property details.</i> (null)*
<b>ClusterSizeBytes</b>	integer (By)	•	This value shall specify the minimum file read-allocation size imposed by the file system. This minimum allocation size shall be the smallest amount of storage allocated to a file by the file system. Under stress conditions, the file system may allocate storage in amounts smaller than this value. (null)*

Property	Type	Attributes	Notes
<b>Description</b>	string	<i>read-only (null)</i>	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>ExportedShares</b>	object		This property shall be an array of exported file shares of this file system. Each entry shall define an exported file share of this file system. Contains a link to a resource.
<b>@odata.id</b>	string	<i>read-write</i>	Link to Collection of <i>FileShare</i> . See the FileShare schema for details.
<b>*Id**</b>	string	<i>read-only required</i>	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Identifiers</b> (v1.1.1+)	array (object)		This property shall contain a list of all known durable names for this file system. For property details, see Identifier v1.14.1).
<b>ImportedShares</b> (v1.0.1+)	array		The value shall be an array of imported file shares.
<b>ImportedShares</b>		<i>read-write</i>	



Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>IOStatistics** (v1.2+) {}</li> </ul>	object		The value shall represent IO statistics for this FileSystem. For property details, see IOStatistics.
Links {	object		This property shall contain links to other resources that are related to this resource.
ClassOfService {	object		This value shall be a link to the ClassOfService for this file system. See the <i>ClassOfService</i> schema for details on this property.
@odata.id	string	<ul style="list-style-type: none"> <li>Link to a ClassOfService resource. See the Links read-section and the <i>ClassOfService</i> schema for details.</li> </ul>	only*
Oem {	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.
ReplicaCollection** [ {	array		This property shall be an array of links to replicas for this file system. Each entry shall be a link to a replica for this file system.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string	• read-only*	Link to another FileSystem resource.
}}			
SpareResourceSets** (v1.2+)	array		Each referenced SpareResourceSet shall contain resources that may be utilized to replace the capacity provided by a failed resource having a compatible type.
<b>@odata.id</b>	string	read-write	Link to a SpareResourceSet resource. See the Links section and the <i>SpareResourceSet</i> schema for details.
}}			
}			
• *LowSpaceWarningThresholds**	array of (integer, integer, string) (int, integer, string) (int, integer, string)	read-write	This property shall be an array containing entries for the percentages of file system capacity at which low space warning events are issued. A LOW_SPACE_THRESHOLD_WARNING event shall be triggered each time the remaining file system capacity value becomes less than one of the values in the array. The following shall be true: Across all CapacitySources entries, percent = (SUM(AllocatedBytes) - SUM(ConsumedBytes))/SUM(AllocatedBytes).

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>integer</li> <li>*MaxFileLengthBy</li> <li>me- Len gthBy tes**</li> </ul>		<ul style="list-style-type: none"> <li>If specified, this value shall specify the maximum read-length of a file name within the file system.</li> <li>write &lt;br&gt;={html}(null)*</li> </ul>	
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>RecoverableCapacitySourceCount (v1.2+)</b>	integer	<ul style="list-style-type: none"> <li>The value is the number of available capacity read-source resources currently available in the event that an equivalent capacity source resource fails.</li> <li>write (null)*</li> </ul>	

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• Remaining Capacity** {}</li> </ul>	object		The value of this property shall be the remaining capacity allocated to the file system in bytes. For property details, see Capacity v1.0.0).
<b>RemainingCapacityPercent</b> (v1.1+)	integer	read-only (null)	If present, this value shall return $\{[(\text{SUM}(\text{AllocatedBytes}) - \text{SUM}(\text{ConsumedBytes})) / \text{SUM}(\text{AllocatedBytes})] * 100\}$ represented as an integer value.
<b>ReplicaInfo</b> {	object		If this file system is a replica, this value shall describe its replication attributes. This value shall not be present if this file system is not a replica. A file system may be both a source and a replica. See the <i>StorageReplicaInfo</i> schema for details on this property.
<b>@odata.id</b>	string	•	Link to a ReplicaInfo resource. See the Links read-section and the <i>StorageReplicaInfo</i> schema for details. only*
}			
<b>ReplicaTargets</b> (v1.2.1+) [ {	array		The value shall reference the target replicas that are sourced by this replica.

Property	Type	Attributes	Notes
@odata.id	string (URI)	•	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
}}			

#### 9.6.16.4 Property details

**9.6.16.4.1 AccessCapabilities:** The defined property values are listed in Table 100. This property shall be an array containing entries for the supported IO access capabilities. Each entry shall specify a current storage access capability.

**Table 100:** AccessCapabilities property values ##### CharacterCodeSet:

string	Description
Append	This enumeration literal shall indicate that the storage may be written only to append.
Execute	This value shall indicate that Execute access is allowed by the file share.
Read	This enumeration literal shall indicate that the storage may be read.
Streaming	This enumeration literal shall indicate that the storage may be read sequentially.
Write	This enumeration literal shall indicate that the storage may be written multiple times.
WriteOnce	This enumeration literal shall indicate that the storage may be written only once.

The defined property values are listed in Table 101. This property shall be an array containing entries for the character sets or encodings supported by the file system. Each entry shall specify a character set encoding supported by the file system.

**Table 101:** CharacterCodeSet property values

string	Description
ASCII	This value shall indicate that the ASCII character encoding is supported by the file system.
ExtendedUNIXCode	This value shall indicate that Extended Unix Code character encoding is supported by the file system.
ISO2022	This value shall indicate that ISO-2022 character encoding is supported by the file system.
ISO8859_1	This value shall indicate that ISO-8859-1 character encoding is supported by the file system.
UCS_2	This value shall indicate that the UCS-2 character encoding is supported by the file system.
Unicode	This value shall indicate that Unicode character encoding is supported by the file system.
UTF_16	This value shall indicate that the UTF-16 character encoding is supported by the file system.
UTF_8	This value shall indicate that the UTF-8 character encoding is supported by the file system.

### 9.6.17 FileSystemCollection

**9.6.17.1 URIs** /redfish/v1/Storage/{StorageId}/FileSystems /redfish/v1/StorageServices/{StorageServiceId}/FileSystems

**9.6.17.2 Properties** The properties defined for the FileSystemCollection schema are summarized in Table 102.

**Table 102:** FileSystemCollection properties

Property	Type	Attributes	Notes
<b>Description</b>	string	read-only	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Members</b>	array of <b>Members</b>		This property shall contain references to the members of this FileSystem collection.
<b>@odata.id</b>	string	read-only	Link to a FileSystem resource. See the Links read-section and the <i>FileSystem</i> schema for details.
<b>Members@odata.nextLink</b>	string (URI)		The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members.
<b>Name</b>	string		This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

### 9.6.18 HostedStorageServices

**9.6.18.1 URIs** /redfish/v1/Systems/{ComputerSystemId}/HostedServices

**9.6.18.2 Properties** The properties defined for the HostedStorageServices schema are summarized in Table 103.

**Table 103:** HostedStorageServices properties

Property	Type	Attributes	Notes
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<ul style="list-style-type: none"> <li>Members**</li> </ul>	array		The value of each member entry shall reference a StorageService resource.
<b>@odata.id</b>	string	<ul style="list-style-type: none"> <li>Link to a StorageService resource. See the Links read-section and the <i>StorageService</i> schema for details.</li> </ul>	only*
<b>Members@odata.nextLink</b>	string (URI)	<ul style="list-style-type: none"> <li>The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members.</li> </ul>	only*



Property	Type	Attributes	Notes
<b>Name</b>	string	•	This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish only*Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

### 9.6.19 IOConnectivityLineOfService 1.2.1

**9.6.19.1 Description** An IO connectivity service option may be used to specify the characteristics of storage connectivity.

**9.6.19.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/IOConnectivityLinesOfService/{IOConnectivityLineOfServiceId} / redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/IOConnectivityLine-OfService/{IOConnectivityLineOfServiceId}

**9.6.19.3 Properties** The properties defined for the IOConnectivityLineOfService 1.2.1 schema are summarized in Table 104.

**Table 104:** IOConnectivityLineOfService 1.2.1 properties

Property	Type	Attributes	Notes
<b>AccessProtocols</b> []	array (string (enumeration))	<ul style="list-style-type: none"> <li>The Enumeration Literal shall specify the Access read-protocol for this service option. NOTE: If multiple protocols are specified, the writecorresponding MaxSupportedIOPS governs the <del>max</del> achieved across all protocol uses. This may be less than the sum of the individual max <del>ull</del>* values, which may be specified by individual Line of Service entries. <i>For the possible property values, see AccessProtocols in Property details.</i></li> </ul>	<p>The Actions property shall contain the available actions for this resource.</p>
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Id</b>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>integer *MaxReadBytesPerSecond** (value 1+)</li> </ul>		<ul style="list-style-type: none"> <li>The value shall be the maximum bytes per read-second that a connection can support.</li> </ul>	
<ul style="list-style-type: none"> <li>integer *MaxWriteIOsPerSecond** (value 1+)</li> </ul>		<ul style="list-style-type: none"> <li>The value shall be the maximum IOs per second that the connection shall allow for the selected access protocol.</li> </ul>	
<b>Name</b>	string	read-only required	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.

#### 9.6.19.4 Property details

**9.6.19.4.1 AccessProtocols:** The defined property values are listed in Table 105. The Enumeration Literal shall specify the Access protocol for this service option. NOTE: If multiple protocols are specified, the corresponding MaxSupportedIOPS governs the

max achieved across all protocol uses. This may be less than the sum of the individual max values, which may be specified by individual Line of Service entries.

**Table 105:** AccessProtocols property values

string	Description
AHCI	This value shall indicate conformance to the Intel Advanced Host Controller Interface (AHCI) Specification.
DisplayPort	This value shall indicate conformance to the VESA DisplayPort Specification.
DVI	This value shall indicate conformance to the Digital Display Working Group DVI-A, DVI-D, or DVI-I Specification.
Ethernet	This value shall indicate conformance to the IEEE 802.3 Ethernet specification.
FC	This value shall indicate conformance to the T11 Fibre Channel Physical and Signaling Interface Specification.
FCoE	This value shall indicate conformance to the T11 FC-BB-5 Specification.
FCP	This value shall indicate conformance to the INCITS 481: Information Technology - Fibre Channel Protocol for SCSI.
FICON	This value shall indicate conformance to the ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.
FTP	This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).
GenZ	This value shall indicate conformance to the Gen-Z Core Specification.
HDMI	This value shall indicate conformance to the HDMI Forum HDMI Specification.
HTTP	This value shall indicate conformance to the Hypertext Transport Protocol (HTTP) as defined by RFC3010 or RFC5661.

string	Description
HTTPS	This value shall indicate conformance to the Hypertext Transfer Protocol Secure (HTTPS) as defined by RFC2068 or RFC2616, which uses Transport Layer Security (TLS) as defined by RFC5246 or RFC6176.
I2C	This value shall indicate conformance to the NXP Semiconductors I2C-bus Specification.
InfiniBand	This value shall indicate conformance to the InfiniBand Architecture Specification-defined InfiniBand protocol.
iSCSI	This value shall indicate conformance to the IETF Internet Small Computer Systems Interface (iSCSI) Specification.
iWARP	This value shall indicate conformance to the RFC5042-defined Internet Wide Area RDMA Protocol (iWARP) that uses the transport layer mechanisms as defined by RFC5043 or RFC5044.
MultiProtocol	This value shall indicate conformance to multiple protocols.
NFSv3	This value shall indicate conformance to the RFC1813-defined Network File System (NFS) protocol.
NFSv4	
NVLink	This value shall indicate conformance to the NVIDIA NVLink protocol.
NVMe	This value shall indicate conformance to the Non-Volatile Memory Host Controller Interface Specification.
NVMeOverFabrics	This value shall indicate conformance to the NVM Express over Fabrics Specification.
OEM	This value shall indicate conformance to an OEM-specific architecture and the OEM section may include additional information.
PCIe	This value shall indicate conformance to the PCI-SIG PCI Express Base Specification.
RoCE	This value shall indicate conformance to the InfiniBand Architecture Specification-defined RDMA over Converged Ethernet Protocol.

---

string	Description
RoCEv2	This value shall indicate conformance to the InfiniBand Architecture Specification-defined RDMA over Converged Ethernet Protocol version 2.
SAS	This value shall indicate conformance to the T10 SAS Protocol Layer Specification.
SATA	This value shall indicate conformance to the Serial ATA International Organization Serial ATA Specification.
SFTP	This value shall indicate conformance to the RFC114-defined SSH File Transfer Protocol (SFTP) that uses Transport Layer Security (TLS) as defined by RFC5246 or RFC6176.
SMB	This value shall indicate conformance to the Server Message Block (SMB), or Common Internet File System (CIFS), protocol.
TCP	This value shall indicate conformance to the IETF-defined Transmission Control Protocol (TCP). For example, RFC7414 defines the roadmap of the TCP specification.
TFTP	This value shall indicate conformance to the IETF-defined Trivial File Transfer Protocol (TFTP). For example, RFC1350 defines the core TFTP version 2 specification.
UDP	This value shall indicate conformance to the IETF-defined User Datagram Protocol (UDP). For example, RFC768 defines the core UDP specification.
UHCI	This value shall indicate conformance to the Intel Universal Host Controller Interface (UHCI) Specification, Enhanced Host Controller Interface Specification, or the Extensible Host Controller Interface Specification.
USB	This value shall indicate conformance to the USB Implementers Forum Universal Serial Bus Specification.
VGA	This value shall indicate conformance to the VESA SVGA Specification.

---

**9.6.20 IOConnectivityLoSCapabilities 1.2.0**

**9.6.20.1 Description** Each instance of IOConnectivityLoSCapabilities describes capabilities of the system to support various IO Connectivity service options.

**9.6.20.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/IOConnectivity-LoSCapabilities

**9.6.20.3 Properties** The properties defined for the IOConnectivityLoSCapabilities 1.2.0 schema are summarized in Table 106.

**Table 106:** IOConnectivityLoSCapabilities 1.2.0 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>Actions** (v1.1+) {}</li> </ul>	object		The Actions property shall contain the available actions for this resource.
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<ul style="list-style-type: none"> <li>Id**</li> </ul>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Identifier</b> {}	object		The value identifies this resource. The value shall be unique within the managed ecosystem. For property details, see Identifier v1.14.1).

Property	Type	Attributes	Notes
<b>MaxSupportedBytesPerSecond</b>	integer (By/s)	<ul style="list-style-type: none"> <li>The value shall be the maximum bytes per read-second that a connection can support.</li> </ul>	write  ={html}(null)*
<b>MaxSupportedIOPS</b> (v1.1+)	integer ([IO]/s)	<ul style="list-style-type: none"> <li>The value shall be the maximum IOPS that a read-connection can support.</li> </ul>	write  ={html}(null)*
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>SupportedAccessProtocols []</b>	array (string (enum))	<ul style="list-style-type: none"> <li>Access protocols supported by this service read-option. NOTE: SMB+NFS* requires that SMB and at least one of NFSv3 or NFXv4 are also selected, write(i.e. {'SMB', 'NFSv4', 'SMB+NFS'}). For the possible property values, see SupportedAccessProtocols in Property details.*</li> </ul>	 ={html}(null)*



Property	Type	Attributes	Notes
<b>SupportedLinesOfService</b> [{ @odata.id }]	array		The collection shall contain known and supported IOConnectivityLinesOfService.
	string	read-write	Link to a IOConnectivityLineOfService resource. See the Links section and the <i>IOConnectivityLineOfService</i> schema for details.

#### 9.6.20.4 Property details

**9.6.20.4.1 SupportedAccessProtocols:** The defined property values are listed in Table 107. Access protocols supported by this service option. NOTE: SMB+NFS\* requires that SMB and at least one of NFSv3 or NFXv4 are also selected, (i.e. {'SMB', 'NFSv4', 'SMB+NFS\*'}).

**Table 107:** SupportedAccessProtocols property values

string	Description
AHCI	This value shall indicate conformance to the Intel Advanced Host Controller Interface (AHCI) Specification.
DisplayPort	This value shall indicate conformance to the VESA DisplayPort Specification.
DVI	This value shall indicate conformance to the Digital Display Working Group DVI-A, DVI-D, or DVI-I Specification.
Ethernet	This value shall indicate conformance to the IEEE 802.3 Ethernet specification.
FC	This value shall indicate conformance to the T11 Fibre Channel Physical and Signaling Interface Specification.
FCoE	This value shall indicate conformance to the T11 FC-BB-5 Specification.

string	Description
FCP	This value shall indicate conformance to the INCITS 481: Information Technology - Fibre Channel Protocol for SCSI.
FICON	This value shall indicate conformance to the ANSI FC-SB-3 Single-Byte Command Code Sets-3 Mapping Protocol for the Fibre Channel (FC) protocol. Fibre Connection (FICON) is the IBM-proprietary name for this protocol.
FTP	This value shall indicate conformance to the RFC114-defined File Transfer Protocol (FTP).
GenZ	This value shall indicate conformance to the Gen-Z Core Specification.
HDMI	This value shall indicate conformance to the HDMI Forum HDMI Specification.
HTTP	This value shall indicate conformance to the Hypertext Transport Protocol (HTTP) as defined by RFC3010 or RFC5661.
HTTPS	This value shall indicate conformance to the Hypertext Transfer Protocol Secure (HTTPS) as defined by RFC2068 or RFC2616, which uses Transport Layer Security (TLS) as defined by RFC5246 or RFC6176.
I2C	This value shall indicate conformance to the NXP Semiconductors I2C-bus Specification.
InfiniBand	This value shall indicate conformance to the InfiniBand Architecture Specification-defined InfiniBand protocol.
iSCSI	This value shall indicate conformance to the IETF Internet Small Computer Systems Interface (iSCSI) Specification.
iWARP	This value shall indicate conformance to the RFC5042-defined Internet Wide Area RDMA Protocol (iWARP) that uses the transport layer mechanisms as defined by RFC5043 or RFC5044.
MultiProtocol	This value shall indicate conformance to multiple protocols.
NFSv3	This value shall indicate conformance to the RFC1813-defined Network File System (NFS) protocol.
NFSv4	

string	Description
NVLink	This value shall indicate conformance to the NVIDIA NVLink protocol.
NVMe	This value shall indicate conformance to the Non-Volatile Memory Host Controller Interface Specification.
NV MeOverFabrics	This value shall indicate conformance to the NVM Express over Fabrics Specification.
OEM	This value shall indicate conformance to an OEM-specific architecture and the OEM section may include additional information.
PCIe	This value shall indicate conformance to the PCI-SIG PCI Express Base Specification.
RoCE	This value shall indicate conformance to the InfiniBand Architecture Specification-defined RDMA over Converged Ethernet Protocol.
RoCEv2	This value shall indicate conformance to the InfiniBand Architecture Specification-defined RDMA over Converged Ethernet Protocol version 2.
SAS	This value shall indicate conformance to the T10 SAS Protocol Layer Specification.
SATA	This value shall indicate conformance to the Serial ATA International Organization Serial ATA Specification.
SFTP	This value shall indicate conformance to the RFC114-defined SSH File Transfer Protocol (SFTP) that uses Transport Layer Security (TLS) as defined by RFC5246 or RFC6176.
SMB	This value shall indicate conformance to the Server Message Block (SMB), or Common Internet File System (CIFS), protocol.
TCP	This value shall indicate conformance to the IETF-defined Transmission Control Protocol (TCP). For example, RFC7414 defines the roadmap of the TCP specification.
TFTP	This value shall indicate conformance to the IETF-defined Trivial File Transfer Protocol (TFTP). For example, RFC1350 defines the core TFTP version 2 specification.

string	Description
UDP	This value shall indicate conformance to the IETF-defined User Datagram Protocol (UDP). For example, RFC768 defines the core UDP specification.
UHCI	This value shall indicate conformance to the Intel Universal Host Controller Interface (UHCI) Specification, Enhanced Host Controller Interface Specification, or the Extensible Host Controller Interface Specification.
USB	This value shall indicate conformance to the USB Implementers Forum Universal Serial Bus Specification.
VGA	This value shall indicate conformance to the VESA SVGA Specification.

#### 9.6.21 IOPerformanceLineOfService 1.1.1

**9.6.21.1 Description** This structure may be used to define a service option related to IO performance.

**9.6.21.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/IOPerformanceLinesOfService/{IOPerformanceLineOfServiceId} / redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/IOPerformanceLine-OfService/{IOPerformanceLineOfServiceId}

**9.6.21.3 Properties** The properties defined for the IOPerformanceLineOfService 1.1.1 schema are summarized in Table 108.

**Table 108:** IOPerformanceLineOfService 1.1.1 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>object</li> <li>*Actions** (v1.1+) {} </li> </ul>			The Actions property shall contain the available actions for this resource.
<ul style="list-style-type: none"> <li>integer</li> <li>*AverageIOOperationLatencyMicroseconds** </li> </ul>		<ul style="list-style-type: none"> <li>The value shall be the expected average IO read-latency in microseconds calculated over sample periods (see SamplePeriodSeconds).</li> <li>write &lt;br&gt;{=html}(null)* </li> </ul>	
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<ul style="list-style-type: none"> <li>*Id**</li> </ul>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.

Property	Type	Attributes	Notes
<b>IO Operations Per Second Limited</b>	boolean	•	If true, the system should not allow IOPS to read-exceed $\text{MaxIOOperationsPerSecondPerTerabyte} \times \text{VolumeSize}$ . Otherwise, the system shall not write-enforce a limit. The default value for this property is false.
<b>IO Workload {}</b>	object		The value shall be a description of the expected workload. The workload provides the context in which the values of $\text{MaxIOOperationsPerSecondPerTerabyte}$ and $\text{AverageIOOperationLatencyMicroseconds}$ are expected to be achievable. For property details, see <i>IOWorkload v1.0.0</i> .
<b>MaxIOOperationsPerSecondPerTerabyte</b>	integer (1/s /TBy)	•	The value shall be the amount of IOPS a volume read-of a given committed size in Terabytes can support. This IOPS density value is useful as a write-metric that is independent of capacity. Cost is a function of this value and the $\text{AverageIOOperationLatencyMicroseconds}$ .
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see <i>Oem</i> .

Property	Type	Attributes	Notes
• <i>SamplePeriod</i> **	string	• The value shall be an ISO 8601 duration read-specifying the sampling period over which average values are calculated. write (null)*	

### 9.6.22 IOPerformanceLoSCapabilities 1.3.0

**9.6.22.1 Description** Each instance of IOPerformanceLoSCapabilities shall describe the capabilities of the system to support various IO performance service options.

**9.6.22.2 URIs** /redfish/v1/StorageServices/{StorageServiceId}/IOPerformanceLoSCapabilities

**9.6.22.3 Properties** The properties defined for the IOPerformanceLoSCapabilities 1.3.0 schema are summarized in Table 109.

**Table 109:** IOPerformanceLoSCapabilities 1.3.0 properties

Property	Type	Attributes	Notes
• <i>Actions</i> ** (v1.1+) {}	object		The Actions property shall contain the available actions for this resource.

Property	Type	Attributes	Notes
<b>Description</b>	string	<i>read-only (null)</i>	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
• <b>*Id**</b>	string	<i>read-only required</i>	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Identifier {}</b>	object		The value shall be unique within the managed ecosystem. For property details, see Identifier v1.14.1).
<b>IOLimitingSupported</b>	boolean	•	If true, the system should limit IOPS to $\text{read-MaxIOOperationsPerSecondPerTerabyte} \times (\text{Volume Size in Terabytes})$ . Otherwise, the writesystem shall not enforce a limit. The default (null) value for this property is false.
<b>MaximumSamplePeriod</b>	string (s)	•	The value shall be an ISO 8601 duration specifying the maximum sampling period over which average values are calculated. write  ={html}(null)*



Property	Type	Attributes	Notes
<b>MinimumSamplePeriod</b>	string (s)	<ul style="list-style-type: none"> <li>The value shall be an ISO 8601 duration read-specifying the minimum sampling period over which average values are calculated.</li> </ul>	<p>write</p> <pre>&lt;br&gt;{=html}(null)*</pre>
<b>MinimumSupportedOperationLatencyMicroseconds**</b>	integer	<ul style="list-style-type: none"> <li>The value shall be the minimum supported read-average IO latency in microseconds calculated over the SamplePeriod.</li> </ul>	<p>write</p> <pre>&lt;br&gt;{=html}(null)*</pre>
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.

Property	Type	Attributes	Notes
<b>SupportedIOWorkloads</b> [{}]	array (object)	* (null)*	The value shall be a collection of supported workloads. For property details, see IOWorkload.
<b>SupportedLinesOfService</b> [{@odata.id}]	array		The value shall be a collection supported IO performance service options.
	string	<i>read-write</i>	Link to a IOPerformanceLineOfService resource. See the Links section and the <i>IOPerformanceLineOfService</i> schema for details.

### 9.6.23 LineOfService 1.1.0

**9.6.23.1 Description** This service option is the abstract base class for other ClassOfService and concrete lines of service.

**9.6.23.2 Properties** The properties defined for the LineOfService 1.1.0 schema are summarized in Table 110.

**Table 110:** LineOfService 1.1.0 properties

Property	Type	Attributes	Notes
<b>Description</b>	string	<i>read-only (null)</i>	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.

Property	Type	Attributes	Notes
• <b>*Id**</b>	string	<i>read-only required</i>	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.

#### 9.6.24 LineOfServiceCollection

**9.6.24.1 URIs** /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/DataProtectionLinesOfService /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/DataSecurityLinesOfService /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/DataStorageLinesOfService /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/IOConnectivityLinesOfService /redfish/v1/StorageServices/{StorageServiceId}/ClassesOfService/{ClassOfServiceId}/IOPerformanceLinesOfService /redfish/v1/StorageServices/{StorageServiceId}/LinesOfService /redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/DataProtectionLinesOfService /redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/DataSecurityLinesOfService /redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/DataStorageLinesOfService /redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/IOConnectivityLinesOfService /redfish/v1/StorageServices/{StorageServiceId}/LinesOfService/IOPerformanceLinesOfService

**9.6.24.2 Properties** The properties defined for the LineOfServiceCollection schema are summarized in Table 111.

**Table 111:** LineOfServiceCollection properties

Property	Type	Attributes	Notes
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Members</b>	array		The value of each member entry shall reference a LineOfService resource.
<b>@odata.type</b>	string		Link to a LineOfService resource. See the Links read-section and the <i>LineOfService</i> schema for details.
<b>@odata.nextLink</b>	string (URI)		The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members.
<b>Name</b>	string		This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

**9.6.25 NVMeDomain 1.1.0**

**9.6.25.1 Description** Properties for the Domain.

**9.6.25.2 URIs** /redfish/v1/NVMeDomains/{NVMeDomainId}

**9.6.25.3 Properties** The properties defined for the NVMeDomain 1.1.0 schema are summarized in Table 112.

**Table 112:** NVMeDomain 1.1.0 properties

Property	Type	Attributes	Notes
<b>Actions</b> {}	object		This property shall contain the available actions for this resource.
<b>AvailableFirmwareImages</b> [ { @odata.id } ]	array		A collection of available firmware images.
<b>Links</b> [ { @odata.id } ]	string	<ul style="list-style-type: none"> <li>Link to a NVMeFirmwareImage resource. See the read-Links section and the <i>NVMeFirmwareImage</i> schema for details.</li> </ul>	only*
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>DomainMembers</b> [ {	array		The members of the domain.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string (URI)	•	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
}}			
• <b>*Id**</b>	string	<i>read-only required</i>	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Links {</b>	object		This property shall contain links to resources that are related to but are not contained by or subordinate to this resource.
AssociateDomainIns** [ {	array		This property shall contain an array of links to resources of type NVMeDomain that represent associated domains.
<b>@odata.id</b>	string	•	Link to another NVMeDomain resource. read-only*
} ]			
<b>Oem {</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.
}			

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>MaximumCapacityPerEnduranceGroupBytes**</b></li> </ul>	integer	<i>read-only</i> <i>&lt;br&gt;{=html}(null)</i>	This property shall contain the maximum capacity per endurance group in bytes of this NVMe Domain.
<b>Name</b>	string	<i>read-only</i> <i>required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>Status {}</b>	object		This property shall contain any status or health properties of the resource. For property details, see Status.
<b>TotalDomainCapacityBytes</b>	integer (By)	<i>read-only</i> <i>&lt;br&gt;{=html}(null)</i>	This property shall contain the total capacity in bytes of this NVMe Domain.

Property	Type	Attributes	Notes
<b>UnallocatedDomainCapacityBytes</b>	integer (By)	<i>read-only</i>  {=html}(null)	This property shall contain the total unallocated capacity in bytes of this NVMe Domain.

### 9.6.26 NVMeDomainCollection

**9.6.26.1 URIs** /redfish/v1/NVMeDomains

**9.6.26.2 Properties** The properties defined for the NVMeDomainCollection schema are summarized in Table 113.

**Table 113:** NVMeDomainCollection properties

Property	Type	Attributes	Notes
<b>Description</b>	string	<i>read-only</i> (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Members</b>	array		The value of each member entry shall reference a NVMeDomain resource.
<b>@odata.id</b>	string		<ul style="list-style-type: none"> <li>Link to a NVMeDomain resource. See the Links read-section and the <i>NVMeDomain</i> schema for details.</li> </ul>



Property	Type	Attributes	Notes
}}]			
<b>Members@odata.nextLink</b>	string (URI)	<ul style="list-style-type: none"> <li>The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members.</li> </ul>	only*
<b>Name</b>	string	<ul style="list-style-type: none"> <li>This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish only*Specification.</li> </ul>	
<b>Oem {}</b>	object	This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.	

### 9.6.27 NVMeFirmwareImage 1.1.0

**9.6.27.1 Description** NVMe Domain firmware image information.

**9.6.27.2 URIs** /redfish/v1/NVMeDomains/{DomainId}/AvailableFirmwareImages/{FirmwareImageId}

**9.6.27.3 Properties** The properties defined for the NVMeFirmwareImage 1.1.0 schema are summarized in Table 114.

**Table 114:** NVMeFirmwareImage 1.1.0 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>Actions</b> {}</li> </ul>	object		This property shall contain the available actions for this resource.
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>FirmwareVersion</b>	string	read-only (null)	This property shall contain the firmware version of the available NVMe firmware image.
<ul style="list-style-type: none"> <li>• <b>Id</b> {}</li> </ul>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Name</b>	string	read-only required	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>NVMeDeviceType</b>	string (enum)	read-only  ={html}(null)	This property shall specify the type of NVMe device for this NVMe firmware image. <i>For the possible property values, see NVMeDeviceType in Property details.</i>
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.

Property	Type	Attributes	Notes
<b>Vendor</b>	string	<i>read-only (null)</i>	This property shall include the name of the manufacturer or vendor associate with this NVMe firmware image.

#### 9.6.27.4 Property details

**9.6.27.4.1 NVMeDeviceType:** The defined property values are listed in Table 115. This property shall specify the type of NVMe device for this NVMe firmware image.

**Table 115:** NVMeDeviceType property values

string	Description
Drive	Specifies an device type of Drive, indicating a NVMe device that presents as an NVMe SSD device.
FabricAttachArray	Specifies an NVMe device type of FabricAttachArray, indicating a NVMe device that presents an NVMe front-end that abstracts the back end storage, typically with multiple options for availability and protection.
JBOF	Specifies an device type of JBOF, indicating a NVMe device that presents as an NVMe smart enclosure for NVMe devices, typically NVMe Drives.

#### 9.6.28 SpareResourceSet 1.0.1

**9.6.28.1 Description** The values define a set of spares of a particular type.

**9.6.28.2 Properties** The properties defined for the SpareResourceSet 1.0.1 schema are summarized in Table 116.

**Table 116:** SpareResourceSet 1.0.1 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>Actions**</b></li> <li>• (v1.0.1+)* {}</li> </ul>	object		The Actions property shall contain the available actions for this resource.
<b>Description</b>	string	<i>read-only (null)</i>	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<ul style="list-style-type: none"> <li>• <b>Id**</b></li> </ul>	string	<i>read-only required</i>	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Links {</b>	object		This structure shall contain references to resources that are not contained within this resource.
<b>Oem {</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>OnHandSpares** [ {</b>	array		The type of resources in the set.
<b>@odata.id</b>	string (URI)	<ul style="list-style-type: none"> <li>•</li> </ul>	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*

Property	Type	Attributes	Notes
ReplacementsSpareSets [ { @odata.id } ] }	array		Other spare sets that can be utilized to replenish this spare set.
	string	• read-only*	Link to another SpareResourceSet resource.
Name	string	read-only required	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
OnHandLocation {}	object		The location where this set of spares is kept. For property details, see Location v1.5.0).

Property	Type	Attributes	Notes
<b>Online</b>	boolean	<ul style="list-style-type: none"> <li>read-write (null)*</li> </ul>	This set shall be available online.
<b>*ResourceType**</b>	string	<ul style="list-style-type: none"> <li>read-write (null)*</li> </ul>	The type of resources in the set.
<b>TimeToProvision</b>	string	<ul style="list-style-type: none"> <li>read-write (null)*</li> </ul>	Amount of time needed to make an on-hand read-resource available as a spare. Pattern: -?P(⌘D)?(T(⌘H)?(⌘M)?(⌘(.⌘)?S)?)?
<b>TimeToReplenish</b>	string	<ul style="list-style-type: none"> <li>read-write (null)*</li> </ul>	Amount of time to needed replenish consumed read-on-hand resources. Pattern: -?P(⌘D)?(T(⌘H)?(⌘M)?(⌘(.⌘)?S)?)?

9.6.29 StorageGroup 1.5.0

**9.6.29.1 Description** The primary purposes of the collection shall be to govern access to the storage by clients or to add service requirements for the members of the collection. Access to the collected storage by a specified set of hosts shall be made available or unavailable atomically. Requirements specified by the class of service shall be satisfied by each collected element to which they apply. The storage group may contain: block, file, or object storage; local storage system access points through which the collection is made available; and hosts, or host access points to which the collection is made available.

**9.6.29.2 URIs** /redfish/v1/Storage/{StorageId}/StorageGroups/{StorageGroupId}  
 /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/StorageGroups/{Storage-  
 GroupId} /redfish/v1/StorageServices/{StorageServiceId}/StorageGroups/{Stor-  
 ageGroupId} /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/  
 StorageGroups/{StorageGroupId}

**9.6.29.3 Properties** The properties defined for the StorageGroup 1.5.0 schema are summarized in Table 117.

**Table 117:** StorageGroup 1.5.0 properties

Pro perty	Type	Attri butes	Notes
<b>AccessState</b>	string (enum)	<ul style="list-style-type: none"> <li>•</li> </ul>	<p>The value of this property shall describe the read-access characteristics of this storage group. All associated logical units through all aggregated writeports shall share this access state. <i>For the possible property values, see AccessState in ml{nProperty details.</i></p> <p>ull)*</p>

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>Actions</b> <b>**</b></li> </ul>	object		The Actions property shall contain the available actions for this resource.
<b>#StorageGroup.ExposedVolumes</b> {}	object		Exposes the storage of this group via the target endpoints named in the ServerEndpointGroups to the initiator endpoints named in the ClientEndpointGroups. The property VolumesAreExposed shall be set to true when this action is completed. <i>For more information, see the Actions section below.</i>
<b>#StorageGroup.HideVolumes</b> {}	object		Hide the storage of this group from the initiator endpoints named in the ClientEndpointGroups. The property VolumesAreExposed shall be set to false when this action is completed. <i>For more information, see the Actions section below.</i>
<b>AuthenticationMethod</b> (v1.2+)	string (enum)	<ul style="list-style-type: none"> <li>• The value of this property must be what kind of read-authentication that the endpoints in this StorageGroup understands. <i>For the possible writeproperty values, see AuthenticationMethod in</i></li> </ul>	<i>Property details.</i>



Property	Type	Attributes	Notes
<b>ChapInfo</b> (v1.2+) [ {	array		The value of this property must reflect the authentication used by this specific endpoint. If this endpoint represents an initiator, and AuthenticationMethod is CHAP or MutualCHAP, the Credentials fields CHAPUsername and CHAPSecret must be used. If this endpoint represents a target endpoint and AuthenticationMethod is MutualCHAP, then MutualCHAPUsername and MutualCHAPSecret must be used.
CHAP Password** (v1.3+)	string		<ul style="list-style-type: none"> <li>The value of this property shall be the password read-when CHAP authentication is specified.</li> </ul> <p>write (null)*</p>
<b>CHAPUsername</b> (v1.3+)	string		<ul style="list-style-type: none"> <li>The value of this property shall be the username read-when CHAP authentication is specified.</li> </ul> <p>write (null)*</p>
<b>InitiatorCHAPPassword</b> (v1.2+)	string		<ul style="list-style-type: none"> <li>The value of this property shall be the shared read-secret for Mutual (2-way)CHAP authentication.</li> </ul> <p>write (null)*</p>

Property	Type	Attributes	Notes
Initiator CHAP User** (v1.2+)	string		<ul style="list-style-type: none"> <li>If present, this property is the initiator CHAP read-username for Mutual (2-way) authentication. For example, with an iSCSI scenario, use the initiator writeiQN. (n ull)*</li> </ul>
<b>TargetCHAP Password</b> (v1.3+)	string		<ul style="list-style-type: none"> <li>The value of this property shall be the CHAP read-Secret for 2-way CHAP authentication. write (n ull)*</li> </ul>
<b>TargetCHAP User</b> (v1.2+)	string		<ul style="list-style-type: none"> <li>The value of this property shall be the Target read-CHAP Username for Mutual (2-way) CHAP authentication. For example, with an iSCSI writescenario, use the target iQN. (n ull)*</li> </ul>
<b>TargetCHAP Password</b> (v1.2+, deprecated v1.3+)	string		<ul style="list-style-type: none"> <li>The value of this property shall be the CHAP read-Secret for 2-way CHAP authentication. <i>Deprecated in v1.3 and later. This property is written deprecated in favor of TargetCHAPPassword.</i> (n ull)*</li> </ul>

Property	Type	Attributes	Notes
ClientEndpointGroups [{	array		An array of references to groups of client-side endpoints that may be used to make requests to the storage exposed by this StorageGroup. If null, the implementation may allow access to the storage via any client-side endpoint. If empty, the implementation shall not allow access to the storage via any client-side endpoint.
@odata.id	string (URI)	<ul style="list-style-type: none"><li></li></ul>	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
}]			
Description	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
DHChapInfo (v1.3+) [{	array		The value of this property must reflect the authentication used by this specific endpoint when the authentication type is specified as DHCHAP. If this endpoint represents an initiator, and AuthenticationMethod is DHCHAP, the Credentials fields LocalDHCHAPAuthSecret and PeerDHCHAPAuthSecret must be used.
LocalDHCHAPAuthSecret (v1.3+)	string	<ul style="list-style-type: none"><li></li></ul>	This property shall be the local DHCHAP authentication-secret for DHCHAP authentication.
		write (null)*	

Property	Type	Attributes	Notes
<b>PeerDHCHAPAuthSecret</b> (v1.3+)	string	<ul style="list-style-type: none"> <li>• The value of this property shall be the peer read-DHCHAP auth secret for DHCHAP authentication.</li> </ul>	write (null)*
}}			
• <b>*Id**</b>	string	<i>read-only required</i>	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Identifier</b> {}	object		The value shall be unique within the managed ecosystem. For property details, see Identifier v1.14.1).
<b>Links</b> {	object		This property shall contain links to other resources that are related to this resource.
<b>ChildStorageGroups</b> [{	array		An array of references to StorageGroups are incorporated into this StorageGroup.
<b>@odata.id</b>	string	<i>read-write</i>	Link to another StorageGroup resource.
}]			
<b>ClassOfService</b> {	object		The ClassOfService that all storage in this StorageGroup conforms to. See the <i>ClassOfService</i> schema for details on this property.
<b>@odata.id</b>	string	<i>read-write</i>	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.
}			

Property	Type	Attributes	Notes
<b>Oem</b> {	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>ParentStorageGroups</b> [{ @odata.id }]	array		An array of references to StorageGroups that incorporate this StorageGroup.
<b>MappedVolumes</b> (v1.1+) [{ <b>AccessCapability</b> (v1.4+)	string (enum)	<ul style="list-style-type: none"> <li>Link to another StorageGroup resource. read-only*</li> </ul>	Each entry shall specify the storage access read-capability for this mapped volume. <i>For the possible property values, see AccessCapability in writeProperty details.</i>

Property	Type	Attributes	Notes
LogicalUnitNumber**	string	<ul style="list-style-type: none"> <li>If present, the value is a SCSI Logical Unit read-Number for the Volume.</li> </ul>	
Volume {	object		The value shall reference a mapped Volume. See the <i>Volume</i> schema for details on this property.
@odata.id	string	<i>read-write</i>	Link to a Volume resource. See the Links section and the <i>Volume</i> schema for details.
}			
}}			
MembersAreConsistent	boolean	<ul style="list-style-type: none"> <li>The value of this property shall be set to true if read-all members are in a consistent state. The default value for this property is false.</li> </ul>	
Name	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
Oem {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.

Property	Type	Attributes	Notes
<b>ReplicaInfo</b> {	object		This property shall describe the replication relationship between this storage group and a corresponding source storage group. See the <i>StorageReplicaInfo</i> schema for details on this property.
<b>@odata.id</b>	string	•	Link to a ReplicaInfo resource. See the Links read-section and the <i>StorageReplicaInfo</i> schema for details. only*
}			
<b>ReplicaTargets</b> (v1.1+)[{	array		The value shall reference the target replicas that are sourced by this replica.
<b>@odata.id</b>	string (URI)	•	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
}]			
<b>ServerEndpointGroups</b> [{	array		An array of references to groups of server-side endpoints that may be used to make requests to the storage exposed by this storage group. If null, the implementation may allow access to the storage via any server-side endpoint. If empty, the implementation shall not allow access to the storage via any server-side endpoint.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string (URI)	•	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
}}			
<b>Status</b>	object		The property shall contain the status of the StorageGroup. For property details, see Status.
	• array		An array of references to volumes managed by this storage group.
	*Volumes**		
	[{		
<b>@odata.id</b>	string	read-write	Link to a Volume resource. See the Links section and the <i>Volume</i> schema for details.
}}			
	• boolean	•	The value of this property shall be set to true if read-storage volumes are exposed to the paths defined by the client and server endpoints. The default value for this property is false.
	*VolumesAreExposed**	(null)*	

#### 9.6.29.4 Actions

##### 9.6.29.4.1 ExposeVolumes Description

Exposes the storage of this group via the target endpoints named in the *ServerEndpointGroups* to the initiator endpoints named in the *ClientEndpointGroups*. The property *VolumesAreExposed* shall be set to true when this action is completed.



**Action URI: {Base URI of target resource}/Actions/StorageGroup.ExposeVolumes**

**Action parameters**

This action takes no parameters.

**9.6.29.4.2 HideVolumes Description**

Hide the storage of this group from the initiator endpoints named in the ClientEndpointGroups. The property VolumesAreExposed shall be set to false when this action is completed.

**Action URI: {Base URI of target resource}/Actions/StorageGroup.HideVolumes**

**Action parameters**

This action takes no parameters.

**9.6.29.5 Property details**

**9.6.29.5.1 AccessCapability:** The defined property values are listed in Table 118. Each entry shall specify the storage access capability for this mapped volume.

**Table 118:** AccessCapability property values ##### AccessState:

string	Description
Read	Endpoints are allowed to perform reads from the specified resource.
ReadWrite	Endpoints are allowed to perform reads from and writes to the specified resource.

The defined property values are listed in Table 119. The value of this property shall describe the access characteristics of this storage group. All associated logical units through all aggregated ports shall share this access state.

**Table 119:** AccessState property values ##### AuthenticationMethod:

string	Description
NonOptimized	This value shall indicate each endpoint is in an active and non-optimized state.
Optimized	This value shall indicate each endpoint is in an active and optimized state.
Standby	This value shall indicate each endpoint is in a standby state.
Transitioning	This value shall indicate each endpoint is transitioning to a new state.
Unavailable	This value shall indicate each endpoint is in an unavailable state.

The defined property values are listed in Table 120. The value of this property must be what kind of authentication that the endpoints in this StorageGroup understands.

**Table 120:** AuthenticationMethod property values

string	Description
CHAP	iSCSI Challenge Handshake Authentication Protocol (CHAP) authentication is used. For ChapInfo, the CHAPUser and CHAPPassword properties shall be used when type CHAP is selected.
DHCHAP	Diffie-Hellman Challenge Handshake Authentication Protocol (DHCHAP) is an authentication protocol used in Fibre Channel. When MutualCHAP is selected, DHChapInfo shall be used instead of CHAPInfo, and the LocalDHCHAPAuthSecret and PeerDHCHAPAuthSecret properties shall be used.
MutualCHAP	iSCSI Mutual Challenge Handshake Authentication Protocol (CHAP) authentication is used. For ChapInfo, the InitiatorCHAPUser, InitiatorCHAPPassword, TargetCHAPUser, and TargetCHAPPassword properties shall be used when type MutualCHAP is selected.
None	

### 9.6.30 StorageGroupCollection

**9.6.30.1 URIs** /redfish/v1/Storage/{StorageId}/StorageGroups /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/StorageGroups /redfish/v1/StorageServices/{StorageServiceId}/StorageGroups /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/StorageGroups

**9.6.30.2 Properties** The properties defined for the StorageGroupCollection schema are summarized in Table 121.

**Table 121:** StorageGroupCollection properties

Property	Type	Attributes	Notes
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<ul style="list-style-type: none"> <li>Members**</li> </ul>	array		The value of each member entry shall reference a StorageGroup resource.
<b>@odata.id</b>	string	<ul style="list-style-type: none"> <li>read-only*</li> </ul>	Link to a StorageGroup resource. See the Links read-section and the <i>StorageGroup</i> schema for details.
<b>Members@odata.nextLink</b>	string (URI)	<ul style="list-style-type: none"> <li>read-only*</li> </ul>	The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members.

Property	Type	Attributes	Notes
<b>Name</b>	string	•	This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish only*Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

### 9.6.31 StoragePool 1.7.1

**9.6.31.1 Description** A container of data storage capable of providing capacity conforming to one of its supported classes of service. The storage pool does not support IO to its data storage.

**9.6.31.2 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StoragePoolId} /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId} /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedPools/{AllocatedPoolId} /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{ProvidingPoolId} /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/AllocatedPools/{StoragePoolId} /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StoragePoolId} /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StoragePoolId} /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId} /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/AllocatedPools/{AllocatedPoolId} /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{ProvidingPoolId} /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/AllocatedPools/{StoragePoolId} /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools/{StoragePoolId} /redfish/v1/

Systems/{ComputerSystemId}/Storage/{StorageId}/FileSystems/{FileSystemId}/  
 CapacitySources/{CapacitySourceId}/ProvidingPools/{StoragePoolId} /redfish/v1/  
 Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}  
 /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/  
 {StoragePoolId}/AllocatedPools/{AllocatedPoolId} /redfish/v1/Systems/{Comput-  
 erSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/  
 {CapacitySourceId}/ProvidingPools/{ProvidingPoolId} /redfish/v1/Systems/{Computer-  
 SystemId}/Storage/{StorageId}/Volumes/{VolumeId}/AllocatedPools/{StoragePoolId}  
 /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}/  
 CapacitySources/{CapacitySourceId}/ProvidingPools/{StoragePoolId}

**9.6.31.3 Properties** The properties defined for the StoragePool 1.7.1 schema are summarized in Table 122.

**Table 122:** StoragePool 1.7.1 properties

Pro perty	Type	Attri butes	Notes
• *Acti ons** (v1 .3+) {	o bject		The Actions property shall contain the available actions for this resource.
<b>#Sto rageP ool.A ddDri ves {}</b>	o bject		This action shall be used to add a drive, or set of drives, to an underlying capacity source for the storage pool. <i>For more information, see the Actions section below.</i>

Property	Type	Attributes	Notes
<b>#StoragePool.RemoveDrives {}</b>	object		This action shall be used to remove a drive from the StoragePool. This action is targeted at a graceful drive removal process, such as initiating a drive cleanup and data reallocation before drive removal from the pool. The implementation may impose restrictions on the number of drives removed simultaneously. <i>For more information, see the Actions section below.</i>
<b>#StoragePool.SetCompressionState {}</b>	object		This action shall be used to set the compression state of the storage pool. This may be both a highly impactful, as well as a long running operation. <i>For more information, see the Actions section below.</i>
<b>#StoragePool.SetDeduplicationState {}</b>	object		This action shall be used to set the dedupe state of the storage pool. This may be both a highly impactful, as well as a long running operation. <i>For more information, see the Actions section below.</i>
<b>#StoragePool.SetEncryptionState** {}</b>	object		This action shall be used to set the encryption state of the storage pool. This may be both a highly impactful, as well as a long running operation. <i>For more information, see the Actions section below.</i>
<b>AllocatedPools {</b>	object		The value of this property shall contain a reference to the collection of storage pools allocated from this storage pool. Contains a link to a resource.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string	<ul style="list-style-type: none"> <li>Link to Collection of <i>StoragePool</i>. See the read-StoragePool schema for details.</li> </ul>	only*
<b>AllocateVolumes {</b>	object		The value of this property shall contain a reference to the collection of volumes allocated from this storage pool. Contains a link to a resource.
<b>@odata.id</b>	string	<ul style="list-style-type: none"> <li>Link to Collection of <i>Volume</i>. See the Volume read-schema for details.</li> </ul>	only*
<b>BlockSizeBytes</b>	integer (By)	<i>read-only</i>  {=html}>null)	Maximum size in bytes of the blocks which form this Volume. If the block size is variable, then the maximum block size in bytes should be specified. If the block size is unknown or if a block concept is not valid (for example, with Memory), enter a 1.
<b>Capacity {}</b>	object		The value of this property shall provide an information about the actual utilization of the capacity within this storage pool. For property details, see Capacity v1.0.0).
<b>CapacitySources {</b>	array		Fully or partially consumed storage from a source resource. Each entry shall provide capacity allocation data from a named source resource.

Property	Type	Attributes	Notes
<b>@odata.id</b> []	string	read-write	Link to a CapacitySource resource. See the Links section and the <i>CapacitySource</i> schema for details.
<b>ClassesOfService</b> {	object		This property shall contain references to all classes of service supported by this storage pool. Capacity allocated from this storage pool shall conform to one of the referenced classes of service. Contains a link to a resource.
<b>@odata.id</b> }	string	read-write	Link to Collection of <i>LineOfService</i> . See the <i>LineOfService</i> schema for details.
<b>Compressed</b> (v1.3+, deprecated v1.6)	boolean	•	This property shall contain a boolean indicator if read-the StoragePool is currently utilizing compression or not. <i>Deprecated in v1.6 and later. writeThis property has been deprecated in favor of the (n IsCompressed and DefaultCompressionBehavior ull)* properties.</i>
<b>CompressionEnabled</b> (v1.6+)	boolean	read-only (null)	The property shall indicate whether or not compression is enabled on the storage pool.



Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li><b>IsDeduplicated</b> (v1.3+, deprecated v1.6)</li> </ul>	boolean	<ul style="list-style-type: none"> <li>read-only</li> </ul>	<ul style="list-style-type: none"> <li>This property shall contain a boolean indicator if the StoragePool is currently utilizing deduplication or not. <i>Deprecated in v1.6 and later. This property has been deprecated in favor of the IsDeduplicated and DefaultDedupeBehavior properties.</i></li> </ul>
<b>IsDeduplicationEnabled</b> (v1.6+)	boolean	read-only (null)	The property shall indicate whether or not deduplication is enabled on the storage pool.
<b>DefaultClassOfService</b> (v1.2+) {	object		If present, this property shall reference the default class of service for entities allocated from this storage pool. If the ClassesOfService collection is not empty, then the value of this property shall be one of its entries. If not present, the default class of service of the containing StorageService entity shall be used. See the <i>ClassOfService</i> schema for details on this property.
<b>@odata.id</b> }	string	read-write	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.

Property	Type	Attributes	Notes
<b>DefaultCompressedBehavior</b> (v1.6+)	boolean	•	If implemented, this property shall indicate the read-default dedupe behavior applied to the child resource (E.g., volume or storage pool) created writeout of the storage pool if the 'Compressed' (n property is not set on the create request. ull)*
<b>DefaultDeduplicationBehavior</b> (v1.6+)	boolean	•	If implemented, this property shall indicate the read-default deduplication behavior applied to the child resource (E.g., volume or storage pool) writecreated out of the storage pool if the (n 'Deduplicated' property is not set on the create ull)* request.
<b>DefaultEncryptionBehavior</b> (v1.6+)	boolean	•	If implemented, this property shall indicate the read-default dedupe behavior applied to the child resource (E.g., volume or storage pool) created writeout of the storage pool if the 'Encrypted' (n property is not set on the create request. ull)*
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Encrypted</b> (v1.3+, deprecated v1.6)	boolean	•	This property shall contain a boolean indicator if read-the StoragePool is currently utilizing encryption or not. <i>Deprecated in v1.6 and later. This property writehas been deprecated in favor of the IsEncrypted (n and DefaultEncryptionBehavior properties. ull)*</i>

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>EncryptionEnabled</b> (v1.6+)</li> </ul>	boolean	read-only (null)	The property shall indicate whether or not encryption is enabled on the storage pool.
<ul style="list-style-type: none"> <li>• <b>Identifier</b></li> </ul>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Identifier</b> {}	object		The value identifies this resource. The value shall be unique within the managed ecosystem. For property details, see Identifier v1.14.1).
<ul style="list-style-type: none"> <li>• <b>IOStatistics</b> (v1.2+)</li> </ul>	object		The value shall represent IO statistics for this StoragePool. For property details, see IOStatistics.
<b>IOStatistics</b> {}	object		
<b>Links</b> {}	object		The Links property, as described by the Redfish Specification, shall contain references to resources that are related to, but not contained by (subordinate to), this resource.

Property	Type	Attributes	Notes
<b>dedicatedSpareDrives</b> (v1.2+) [ {	array		The value of this property shall be a reference to the resources that this StoragePool is associated with and shall reference resources of type Drive. This property shall only contain references to Drive entities which are currently assigned as a dedicated spare and are able to support this StoragePool.
<b>@odata.id</b>	string (URI)	•	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
<b>DefaultClassOfService</b> {	object		If present, this property shall reference the default class of service for entities allocated from this storage pool. If the ClassesOfService collection is not empty, then the value of this property shall be one of its entries. If not present, the default class of service of the containing StorageService entity shall be used. See the <i>ClassOfService</i> schema for details on this property.
<b>@odata.id</b>	string	read-write	Link to a ClassOfService resource. See the Links section and the <i>ClassOfService</i> schema for details.
<b>Oem</b> {	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

Property	Type	Attributes	Notes
<b>OwnershipStorageResource</b> (v1.4+) {	object		This shall be a pointer to the Storage resource that owns or contains this StoragePool.
<b>@odata.id</b>	string (URI)	•	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
}			
<b>SpareResourceSets</b> (v1.2+) [ {	array		Each referenced SpareResourceSet shall contain resources that may be utilized to replace the capacity provided by a failed resource having a compatible type.
<b>@odata.id</b>	string	read-write	Link to a SpareResourceSet resource. See the Links section and the <i>SpareResourceSet</i> schema for details.
}]			
}			

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>LowSpaceWarningThresholdPercent</b> (integer, minimum=0, maximum=100) The percentage of allocated space that, when reached, triggers the LOW_SPACE_THRESHOLD_WARNING event. The value shall be in the range 0 to 100. The event shall be triggered when the percentage of allocated space used reaches the value of this property.</li> </ul>	array of integers	read-write	Each time the following value is less than one of the values in the array the LOW_SPACE_THRESHOLD_WARNING event shall be triggered: Across all CapacitySources entries, percent = (SUM(AllocatedBytes) - SUM(ConsumedBytes))/SUM(AllocatedBytes).
<ul style="list-style-type: none"> <li>• <b>MaxBlockSize</b> (integer, minimum=0, maximum=256) The maximum block size of an allocated resource. If the block size is unknown or if a block concept is not valid (for example, with Memory), this property shall be NULL.</li> </ul>	integer	read-only	If present, the value is the maximum block size of an allocated resource. If the block size is unknown or if a block concept is not valid (for example, with Memory), this property shall be NULL.
<ul style="list-style-type: none"> <li>• <b>Version</b> (string, minimum=1.0, maximum=1.4) The version of the property.</li> </ul>	string	read-only	
<b>Name</b>	string	read-only, required	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>NVMeEnduranceGroupProperties</b> (v1.4+)	object	*(null)*	This property shall contain properties to use when StoragePool is used to describe an NVMe Endurance Group.

Property	Type	Attributes	Notes
<b>EnduranceGroupLifetime</b> (v1.4+)	object	* (null)*	This property shall contain any Endurance Group Lifetime properties.
<b>EnduranceGroupLifetimeDataUnitsRead</b> (v1.4+)	integer	read-only (null)	The property shall contain the total number of data units read from this endurance group. This value does not include controller reads due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.
<b>EnduranceGroupLifetimeDataUnitsWritten</b> (v1.4+)	integer	read-only (null)	The property shall contain the total number of data units written from this endurance group. This value does not include controller writes due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.
<b>EnduranceGroupLifetimeEstimate</b> (v1.4+)	integer	read-only (null)	This property shall contain an estimate of the total number of data bytes that may be written to the Endurance Group over the lifetime of the Endurance Group assuming a write amplification of 1. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates endurance estimates are unsupported.

Property	Type	Attributes	Notes
<b>ErrorLogEntryCount</b> (v1.4+)	integer	read-only (null)	This property shall contain the number of error information log entries over the life of the controller for the endurance group.
<b>HostReadCommandCount</b> (v1.4+)	integer	read-only (null)	This property shall contain the number of read commands completed by all controllers in the NVM subsystem for the Endurance Group. For the NVM command set, this is the number of compare commands and read commands.
<b>HostWriteCommandCount</b> (v1.4+)	integer	read-only (null)	This property shall contain the number of write commands completed by all controllers in the NVM subsystem for the Endurance Group. For the NVM command set, this is the number of compare commands and write commands.
<b>MediaAndDataIntegrityErrorCount</b> (v1.4+)	integer	read-only (null)	This property shall contain the number of occurrences where the controller detected an unrecovered data integrity error for the Endurance Group. Errors such as uncorrectable ECC, CRC checksum failure, or LBA tag mismatch are included in this field.



Property	Type	Attributes	Notes
<b>MediaUnitsWritten**</b> (v1.4+)	integer	<i>read-only (null)</i>	The property shall contain the total number of data units written from this endurance group. This value includes host and controller writes due to internal operations such as garbage collection. The value is reported in billions, where a value of 1 corresponds to 1 billion bytes written, and is rounded up. A value of zero indicates the property is unsupported.
<b>PercentUsed</b> (v1.4+)	integer	<i>read-only (null)</i>	This property shall contain a vendor-specific estimate of the percent life used for the endurance group based on the actual usage and the manufacturer prediction of NVM life. A value of 100 indicates that the estimated endurance of the NVM in the Endurance Group has been consumed, but may not indicate an NVM failure. According to the NVMe and JEDEC specs, the value is allowed to exceed 100. Percentages greater than 254 shall be represented as 255.
}			
<b>PercentageLifeLeftPercent</b> (v1.4+)	number (%)	<i>read-only</i>  {=html} (null)	This property shall contain an indicator of the percentage of life remaining in the drive's media.
}			
<b>NVMeProperties</b> (v1.6+)	object	* (null)*	The property shall indicate the type of storage pool.

Property	Type	Attributes	Notes
<b>NVMe PoolType**</b> (v1.6+)	string (enum)	<i>read-only</i> <i>&lt;br&gt;{=html}(null)</i>	This property shall indicate whether the StoragePool is used as an EnduranceGroup or an NVMeSet. <i>For the possible property values, see NVMePoolType in Property details.</i>
<b>Object *NVMeSetProperties**</b> (v1.4+) {	object	<i>*(null)*</i>	This property shall contain properties to use when StoragePool is used to describe an NVMeSet.
<b>EnduranceGroupIdentifier</b> (v1.4+)	string	<i>read-only (null)</i>	This property shall contain a 16-bit hex value that contains the endurance group identifier. The endurance group identifier is unique within a subsystem. Reserved values include 0. Pattern: ^0[xX]([a-fA-F]
<b>OptimalWriteSize</b> (v1.4+)	integer (By)	<i>read-only</i> <i>&lt;br&gt;{=html}(null)</i>	This property shall contain the Optimal Write Size in Bytes for this NVMe Set.

Property	Type	Attributes	Notes
<b>RandomReadTypicalNanos</b> (v1.4+)	integer	read -only (null)	This property shall contain the typical time to complete a 4k read in 100 nano-second units when the NVM Set is in a Predictable Latency Mode Deterministic Window and there is 1 outstanding command per NVM Set.
<b>SetIdentifier</b> (v1.4+)	string	read -only (null)	This property shall contain a 16-bit hex value that contains the NVMe Set group identifier. The NVMe Set identifier is unique within a subsystem. Reserved values include 0. Pattern: ^0[xX]([a-fA-F]
<b>UnallocatedNVMeSpaceCapacityBytes</b> (v1.4+)	integer (By)	read -only  {html}(null)	This property shall contain the unallocated capacity of the NVMe Set in bytes.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>PoolType</b> (v1.6+, deprecated v1.7 [ ])	array (string (enum))	read -only  {html}(null)	The property shall indicate the type of storage pool. <i>For the possible property values, see PoolType in Property details. Deprecated in v1.7 and later. This property has been deprecated in favor of the SupportedPoolTypes property.</i>

Property	Type	Attributes	Notes
<b>ReadableCapacitySourceCount</b> (v1.2+)	integer	<ul style="list-style-type: none"><li>•</li></ul>	The value is the number of available capacity read-source resources currently available in the event that an equivalent capacity source resource fails.
<b>RemainingCapacityPercent</b> (v1.1+)	integer	<i>read-only (null)</i>	If present, this value shall return $\{[(\text{SUM}(\text{AllocatedBytes}) - \text{SUM}(\text{ConsumedBytes}))/\text{SUM}(\text{AllocatedBytes})]*100\}$ represented as an integer value.
<b>Status</b> {}	object		The property shall contain the status of the StoragePool. For property details, see Status.
<b>SupportedPoolTypes</b> (v1.7+) []	array (string (enumeration))	<i>read-only</i> <i>&lt;br&gt;{=html}(null)</i>	This collection shall contain all the PoolType values supported by the storage pool. <i>For the possible property values, see SupportedPoolTypes in Property details.</i>
<b>SupportedProvisioningPolicies</b> (v1.3+) []	array (string (enumeration))	<ul style="list-style-type: none"><li>•</li></ul>	This collection shall specify all supported read-storage allocation policies for the Storage Pool. <i>For the possible property values, see SupportedProvisioningPolicies in Property details.</i>

Property	Type	Attributes	Notes
<b>SupportedRAIDTypes</b> (v1.3+) []	array (string (enumeration))	<i>read-only</i>  {=html>{n ull)	This collection shall contain all the RAIDType values supported by the storage pool. <i>For the possible property values, see SupportedRAIDTypes in Property details.</i>

#### 9.6.31.4 Actions

##### 9.6.31.4.1 AddDrives Description

This action shall be used to add a drive, or set of drives, to an underlying capacity source for the storage pool.

**Action URI:** {Base URI of target resource}/Actions/StoragePool.AddDrives

##### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.31.4.1. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **CapacitySource** { | object | *optional* | This parameter shall contain the target capacity source for the drive(s). This property does not need to be specified if the storage pool only contains one capacity source, or if the implementation is capable of automatically selecting the appropriate capacity source. See the *CapacitySource* schema for details on this property. | | **@odata.id** | string | *read-only* | Link to a *CapacitySource* resource. See the Links section and the *CapacitySource* schema for details. | | } | | | **Drives** [ { | array | *required* | This parameter shall contain the Uri to the existing drive or drives to be added to a capacity source of the storage pool. The implementation may impose restrictions on the number of drives added simultaneously. | | **@odata.id** | string (URI) | *read-only* | The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification. | | } ] | | Table: AddDrives action parameters

##### 9.6.31.4.2 RemoveDrives Description

This action shall be used to remove a drive from the StoragePool. This action is targeted at a graceful drive removal process, such as initiating a drive cleanup and

data reallocation before drive removal from the pool. The implementation may impose restrictions on the number of drives removed simultaneously.

**Action URI: {Base URI of target resource}/Actions/StoragePool.RemoveDrives**

#### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.31.4.2. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **Drives** [ { | array | *required* | This parameter shall contain the Uri to the drive or drives to be removed from the underlying capacity source. | | **@odata.id** | string (URI) | *read-only* | The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification. | | } ] | | Table: RemoveDrives action parameters

#### 9.6.31.4.3 SetCompressionState Description

This action shall be used to set the compression state of the storage pool. This may be both a highly impactful, as well as a long running operation.

**Action URI: {Base URI of target resource}/Actions/StoragePool.SetCompressionState**

#### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.31.4.3. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **Enable** | boolean | *required* | This property shall indicate the desired compression state of the storage pool. | | Table: SetCompressionState action parameters

#### 9.6.31.4.4 SetDeduplicationState Description

This action shall be used to set the dedupe state of the storage pool. This may be both a highly impactful, as well as a long running operation.

**Action URI: {Base URI of target resource}/Actions/StoragePool.SetDeduplicationState**

#### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.31.4.4. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **Enable** | boolean | *required* | This property shall indicate the desired deduplication state of the storage pool. | | Table: SetDeduplicationState action parameters

#### 9.6.31.4.5 SetEncryptionState Description

This action shall be used to set the encryption state of the storage pool. This may be both a highly impactful, as well as a long running operation.

**Action URI:** {Base URI of target resource}/Actions/StoragePool.SetEncryptionState

#### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.31.4.5. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **Enable** | boolean | *required* | This property shall indicate the desired encryption state of the storage pool. | Table: SetEncryptionState action parameters

#### 9.6.31.5 Property details

**9.6.31.5.1 NVMePoolType:** The defined property values are listed in Table 123. This property shall indicate whether the StoragePool is used as an EnduranceGroup or an NVMeSet.

**Table 123:** NVMePoolType property values ##### PoolType:

string	Description
EnduranceGroup	This type shall be used to specify a pool of type EnduranceGroup, used by NVMe devices.
NVMeSet	This type shall be used to specify a pool of type NVMeSet, used by NVMe devices.

The defined property values are listed in Table 124. The property shall indicate the type of storage pool.

**Table 124:** PoolType property values ##### SupportedPoolTypes:

string	Description
Block	This type shall be used to specify a pool of type block. This is used when the pool serves block storage.

string	Description
File	This type shall be used to specify a pool of type file. This setting is used when the pool serves file storage.
Object	This type shall be used to specify a pool of type object.
Pool	This type shall be used to specify a pool of type pool. This setting is used to indicate a 'pool of pools' hierarchy.

The defined property values are listed in Table 125. This collection shall contain all the PoolType values supported by the storage pool.

**Table 125:** SupportedPoolTypes property values #####

SupportedProvisioningPolicies:

string	Description
Block	This type shall be used to specify a pool of type block. This is used when the pool serves block storage.
File	This type shall be used to specify a pool of type file. This setting is used when the pool serves file storage.
Object	This type shall be used to specify a pool of type object.
Pool	This type shall be used to specify a pool of type pool. This setting is used to indicate a 'pool of pools' hierarchy.

The defined property values are listed in Table 126. This collection shall specify all supported storage allocation policies for the Storage Pool.

**Table 126:** SupportedProvisioningPolicies property values #####

SupportedRAIDTypes:

string	Description
Fixed	This enumeration literal specifies storage shall be fully allocated.



string	Description
Thin	This enumeration literal specifies storage may be over allocated.

The defined property values are listed in Table 127. This collection shall contain all the RAIDType values supported by the storage pool.

**Table 127:** SupportedRAIDTypes property values

string	Description
None	A placement policy with no redundancy at the device level.
RAID0	A placement policy where consecutive logical blocks of data are uniformly distributed across a set of independent storage devices without offering any form of redundancy. This is commonly referred to as data striping. This form of RAID will encounter data loss with the failure of any storage device in the set.
RAID00	A placement policy that creates a RAID 0 stripe set over two or more RAID 0 sets. This is commonly referred to as RAID 0+0. This form of data layout is not fault tolerant; if any storage device fails there will be data loss.
RAID01	A data placement policy that creates a mirrored device (RAID 1) over a set of striped devices (RAID 0). This is commonly referred to as RAID 0+1 or RAID 0/1. Data stored using this form of RAID is able to survive a single RAID 0 data set failure without data loss.
RAID1	A placement policy where each logical block of data is stored on more than one independent storage device. This is commonly referred to as mirroring. Data stored using this form of RAID is able to survive a single storage device failure without data loss.

string	Description
RAID10	A placement policy that creates a striped device (RAID 0) over a set of mirrored devices (RAID 1). This is commonly referred to as RAID 1/0. Data stored using this form of RAID is able to survive storage device failures in each RAID 1 set without data loss.
RAID10E	A placement policy that uses a RAID 0 stripe set over two or more RAID 10 sets. This is commonly referred to as Enhanced RAID 10. Data stored using this form of RAID is able to survive a single device failure within each nested RAID 1 set without data loss.
RAID10Triple	A placement policy that uses a striped device (RAID 0) over a set of triple mirrored devices (RAID 1Triple). This form of RAID can survive up to two failures in each triple mirror set without data loss.
RAID1E	A placement policy that uses a form of mirroring implemented over a set of independent storage devices where logical blocks are duplicated on a pair of independent storage devices so that data is uniformly distributed across the storage devices. This is commonly referred to as RAID 1 Enhanced. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID1Triple	A placement policy where each logical block of data is mirrored three times across a set of three independent storage devices. This is commonly referred to as three-way mirroring. This form of RAID can survive two device failures without data loss.
RAID3	A placement policy using parity-based protection where logical bytes of data are uniformly distributed across a set of independent storage devices and where the parity is stored on a dedicated independent storage device. Data stored using this form of RAID is able to survive a single storage device failure without data loss. If the storage devices use rotating media, they are assumed to be rotationally synchronized, and the data stripe size should be no larger than the exported block size.

string	Description
RAID4	A placement policy using parity-based protection where logical blocks of data are uniformly distributed across a set of independent storage devices and where the parity is stored on a dedicated independent storage device. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID5	A placement policy using parity-based protection for storing stripes of 'n' logical blocks of data and one logical block of parity across a set of 'n+1' independent storage devices where the parity and data blocks are interleaved across the storage devices. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID50	A placement policy that uses a RAID 0 stripe set over two or more RAID 5 sets of independent storage devices. Data stored using this form of RAID is able to survive a single storage device failure within each RAID 5 set without data loss.
RAID6	A placement policy using parity-based protection for storing stripes of 'n' logical blocks of data and two logical blocks of independent parity across a set of 'n+2' independent storage devices where the parity and data blocks are interleaved across the storage devices. Data stored using this form of RAID is able to survive any two independent storage device failures without data loss.
RAID60	A placement policy that uses a RAID 0 stripe set over two or more RAID 6 sets of independent storage devices. Data stored using this form of RAID is able to survive two device failures within each RAID 6 set without data loss.
RAID6TP	A placement policy that uses parity-based protection for storing stripes of 'n' logical blocks of data and three logical blocks of independent parity across a set of 'n+3' independent storage devices where the parity and data blocks are interleaved across the storage devices. This is commonly referred to as Triple Parity RAID. Data stored using this form of RAID is able to survive any three independent storage device failures without data loss.

### 9.6.32 StoragePoolCollection

**9.6.32.1 URIs** /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingPools /redfish/v1/Storage/{StorageId}/StoragePools /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedPools /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/ProvidingPools /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/AllocatedPools /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingPools /redfish/v1/StorageServices/{StorageServiceId}/StoragePools /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/AllocatedPools /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/ProvidingPools /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/AllocatedPools /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingPools /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedPools /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/ProvidingPools /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}/AllocatedPools /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingPools

**9.6.32.2 Properties** The properties defined for the StoragePoolCollection schema are summarized in Table 128.

**Table 128:** StoragePoolCollection properties

Property	Type	Attributes	Notes
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>array</li> <li>*Members**</li> <li>[ {</li> </ul>			The value of each member entry shall reference a StoragePool resource.
<b>@odata.id</b>	string	<ul style="list-style-type: none"> <li>Link to a StoragePool resource. See the Links read-section and the <i>StoragePool</i> schema for details.</li> </ul>	only*
<b>Members@odata.nextLink</b>	string (URI)	<ul style="list-style-type: none"> <li>The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members.</li> </ul>	only*
<b>Name</b>	string	<ul style="list-style-type: none"> <li>This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish only*Specification.</li> </ul>	
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

### 9.6.33 StorageReplicaInfo 1.4.0

**9.6.33.1 Description** This entity shall define the characteristics of a replica.

**9.6.33.2 Properties** The properties defined for the StorageReplicaInfo 1.4.0 schema are summarized in Table 129.

**Table 129:** StorageReplicaInfo 1.4.0 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>Actions</b> (v1.2+)</li> </ul>	object		The Actions property shall contain the available actions for this resource.
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<ul style="list-style-type: none"> <li>• <b>Id</b></li> </ul>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Name</b>	string	read-only required	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.

## 9.6.34 StorageService 1.5.0

**9.6.34.1 Description** Collection of resources that the system can make available to one or more host systems. The collection can contain: block, file, or object storage; local system access points through which the collection is made available; hosts, or

host access points to which the collection is made available.

**9.6.34.2 URIs** /redfish/v1/StorageServices/{StorageServiceId} /redfish/v1/Systems/{ComputerSystemId}/StorageServices/{StorageServiceId}

**9.6.34.3 Properties** The properties defined for the StorageService 1.5.0 schema are summarized in Table 130.

**Table 130:** StorageService 1.5.0 properties

Property	Type	Attributes	Notes
<ul style="list-style-type: none"><li>• <b>*Actions</b></li></ul>	object		The Actions property shall contain the available actions for this resource.
<b>#StorageService.SetEncryptionKey</b>	object		This defines the name of the custom action supported on this resource. <i>For more information, see the Actions section below.</i>
<b>ClassesOfService</b>	object		The value of each entry in the array shall reference a ClassOfService supported by this service. Contains a link to a resource.
<b>@odata.id</b>	string	read-write	Link to Collection of <i>LineOfService</i> . See the LineOfService schema for details.

Property	Type	Attributes	Notes
<b>ClientEndpointGroups {}</b>	object		The value of each entry in the array shall reference an EndpointGroup.
<ul style="list-style-type: none"> <li><b>*ConsistencyGroups**</b> (v1.3+) {</li> </ul>	object		The value of each entry in the array shall reference a ConsistencyGroup. Contains a link to a resource.
<b>@odata.id</b> }	string	read-write	Link to Collection of <i>ConsistencyGroup</i> . See the ConsistencyGroup schema for details.
<b>DataProtectionLoSCapabilities</b> (v1.2+) {	object		The value shall reference the data protection capabilities of this service. See the <i>DataProtectionLoSCapabilities</i> schema for details on this property.
<b>@odata.id</b> }	string	read-write	Link to a DataProtectionLoSCapabilities resource. See the Links section and the <i>DataProtectionLoSCapabilities</i> schema for details.



Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>• <b>DataSecurityLoSCapabilities</b> (v1.2+) {</li> </ul>	object		The value shall reference the data security capabilities of this service. See the <i>DataSecurityLoSCapabilities</i> schema for details on this property.
<b>@odata.id</b>	string	read-write	Link to a DataSecurityLoSCapabilities resource. See the Links section and the <i>DataSecurityLoSCapabilities</i> schema for details.
<b>DataStorageLoSCapabilities</b> (v1.2+) {	object		The value shall reference the data storage capabilities of this service. See the <i>DataStorageLoSCapabilities</i> schema for details on this property.
<b>@odata.id</b>	string	read-write	Link to a DataStorageLoSCapabilities resource. See the Links section and the <i>DataStorageLoSCapabilities</i> schema for details.
<b>DefaultClassOfService</b> (v1.2+) {	object		If present, this property shall reference the default class of service for entities allocated by this storage service. This default may be overridden by the DefaultClassOfService property values within contained StoragePools. See the <i>ClassOfService</i> schema for details on this property.

Property	Type	Attributes	Notes
<b>@odata.id</b> }	string	<i>read-write</i>	Link to a <i>ClassOfService</i> resource. See the Links section and the <i>ClassOfService</i> schema for details.
<b>Description</b>	string	<i>read-only (nullable)</i>	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Drives</b> {	object		A collection that indicates all the drives managed by this storage service.
<b>EndpointGroups</b> {	object		The value of each entry in the array shall reference an <i>EndpointGroup</i> .
<b>Endpoints</b> {	object		The value of each entry in the array shall reference an <i>Endpoint</i> managed by this service.
<b>FileSystems</b> {	object		An array of references to <i>FileSystems</i> managed by this storage service. Contains a link to a resource.
<b>@odata.id</b> }	string	<i>read-write</i>	Link to Collection of <i>FileSystem</i> . See the <i>FileSystem</i> schema for details.
• <b>*Id**</b>	string	<i>read-only required</i>	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Identifier</b> {	object		The value identifies this resource. The value shall be unique within the managed ecosystem. For property details, see <i>Identifier v1.14.1</i> ).

Property	Type	Attributes	Notes
<b>IOConnectivityLoSCapabilities</b> (v1.2+) { @odata.id }	object		The value shall reference the IO connectivity capabilities of this service. See the <i>IOConnectivityLoSCapabilities</i> schema for details on this property.
<b>IOPerformanceLoSCapabilities</b> (v1.2+) { @odata.id }	object	read-write	The value shall reference the IO performance capabilities of this service. See the <i>IOPerformanceLoSCapabilities</i> schema for details on this property.
• <b>IOStatistics</b> (v1.2+) {}	object		The value shall represent IO statistics for this StorageService. For property details, see <i>IOStatistics</i> .

Property	Type	Attributes	Notes
<b>LinesOfService</b> (v1.4+) [ { @odata.id } ]	array		The value of each entry shall reference a LineOfService collection defined for this service.
<b>Links</b> { <b>DataProtectionLoSCapabilities</b> { @odata.id } DataSecurityLoSCapabilities** { @odata.id }	object	read-write	This property shall contain links to other resources that are related to this resource.
	object		The value shall reference the data protection capabilities of this service. See the <i>DataProtectionLoSCapabilities</i> schema for details on this property.
	string	read-write	Link to a DataProtectionLoSCapabilities resource. See the Links section and the <i>DataProtectionLoSCapabilities</i> schema for details.
	object		The value shall reference the data security capabilities of this service. See the <i>DataSecurityLoSCapabilities</i> schema for details on this property.
	string	read-write	Link to a DataSecurityLoSCapabilities resource. See the Links section and the <i>DataSecurityLoSCapabilities</i> schema for details.

Property	Type	Attributes	Notes
<b>DataStorageLoSCapabilities</b> {	object		The value shall reference the data storage capabilities of this service. See the <i>DataStorageLoSCapabilities</i> schema for details on this property.
<b>@odata.id</b> }	string	read-write	Link to a <i>DataStorageLoSCapabilities</i> resource. See the Links section and the <i>DataStorageLoSCapabilities</i> schema for details.
<b>DefaultClassOfService</b> {	object		If present, this property shall reference the default class of service for entities allocated by this storage service. This default may be overridden by the <i>DefaultClassOfService</i> property values within contained <i>StoragePools</i> . See the <i>ClassOfService</i> schema for details on this property.
<b>@odata.id</b> }	string	read-write	Link to a <i>ClassOfService</i> resource. See the Links section and the <i>ClassOfService</i> schema for details.
<b>HostingSystem</b> {	object		The value shall reference the <i>ComputerSystem</i> or <i>StorageController</i> that hosts this service.
<b>IOConnectivityLoSCapabilities</b> {	object		The value shall reference the IO connectivity capabilities of this service. See the <i>IOConnectivityLoSCapabilities</i> schema for details on this property.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string	<i>read-write</i>	Link to a <i>IOConnectivityLoSCapabilities</i> resource. See the Links section and the <i>IOConnectivityLoSCapabilities</i> schema for details.
<b>IOPerformanceLoSCapabilities</b>	object		The value shall reference the IO performance capabilities of this service. See the <i>IOPerformanceLoSCapabilities</i> schema for details on this property.
<b>@odata.id</b>	string	<i>read-write</i>	Link to a <i>IOPerformanceLoSCapabilities</i> resource. See the Links section and the <i>IOPerformanceLoSCapabilities</i> schema for details.
<b>Oem</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see <i>Oem</i> .
<b>Name</b>	string	<i>read-only required</i>	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>Oem</b>	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see <i>Oem</i> .

Property	Type	Attributes	Notes
<b>Redundancy</b> [{ @odata.id }]	array		This collection shall contain the redundancy information for the storage subsystem.
<b>EndpointGroups</b> { *SpareResourceSets** (v1.2+) [{ @odata.id }]	string (URI)	•	<p>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</p> <p>only*</p>
<b>ServerEndpointGroups</b> { array	object		The value of each entry in the array shall reference a EndpointGroup.
<b>Status</b> { StorageGroups {	object		The property shall contain the status of the StorageService. For property details, see Status.
	object		The value of each entry in the array shall reference a StorageGroup. Contains a link to a resource.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string	<ul style="list-style-type: none"> <li>Link to Collection of <i>StorageGroup</i>. See the read-StorageGroup schema for details.</li> </ul>	only*
}			
	object		An array of references to StoragePools. Contains a link to a resource.
	*StoragePools**		
	{		
<b>@odata.id</b>	string	<ul style="list-style-type: none"> <li>Link to Collection of <i>StoragePool</i>. See the read-StoragePool schema for details.</li> </ul>	only*
}			
	object		The value shall be a link to a collection of type StorageCollection having members that represent storage subsystems managed by this storage service.
	*StorageSubsystems**		
	•		
	(v1.0		
	.1+)*		
	{}		



Property	Type	Attributes	Notes
• <i>object</i> *Volumes** {			An array of references to Volumes managed by this storage service. Contains a link to a resource.
@odata.id }	string	read-write	Link to Collection of <i>Volume</i> . See the Volume schema for details.

#### 9.6.34.4 Actions

##### 9.6.34.4.1 SetEncryptionKey Description

This defines the name of the custom action supported on this resource.

**Action URI:** {Base URI of target resource}/Actions/StorageService.SetEncryptionKey

##### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the ‘target’ property of the Action are summarized in Table 9.6.34.4.1. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **EncryptionKey** | string | *optional* | This defines the property name for the action. | Table: SetEncryptionKey action parameters

#### 9.6.34.5 Property details

##### 9.6.34.5.1 idRef:

• string *@g (o dURL) at  a. id **	• The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification.  - o nl y*

9.6.35 StorageServiceCollection

9.6.35.1 URIs /redfish/v1/StorageServices /redfish/v1/Systems/{ComputerSystemId}/StorageServices

9.6.35.2 Properties The properties defined for the StorageServiceCollection schema are summarized in Table 132.

Table 132: StorageServiceCollection properties

Property	Type	Attributes	Notes
Description	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the ‘Description’ clause of the Redfish Specification.
		array *Members** [ {	The value of each member entry shall reference a StorageService resource.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string	•	Link to a StorageService resource. See the Links read-section and the <i>StorageService</i> schema for details. only*
}}			
<b>Members@odata.nextLink</b>	string (URI)	•	The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members. only*
<b>Name</b>	string	•	This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish only*Specification.
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

### 9.6.36 StorageSystemCollection

#### 9.6.36.1 URIs /redfish/v1/StorageSystems

**9.6.36.2 Properties** The properties defined for the StorageSystemCollection schema are summarized in Table 133.

**Table 133:** StorageSystemCollection properties

Property	Type	Attributes	Notes
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Members</b>	array		The value of each member entry shall reference a ComputerSystem resource that shall have a HostingRoles entry with a value of 'StorageServer'.
<b>@odata.id</b>	string (URI)		<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul>
<b>Members@odata.nextLink</b>	string (URI)		<ul style="list-style-type: none"> <li>The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members.</li> </ul>
<b>Name</b>	string		<ul style="list-style-type: none"> <li>This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.</li> </ul>
<b>Oem</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

**9.6.37 Volume 1.8.0**

**9.6.37.1 Description** This resource shall be used to represent a volume, virtual disk, logical disk, LUN, or other logical storage for a Redfish implementation.

**9.6.37.2 URIs** /redfish/v1/CompositionService/ResourceBlocks/{ResourceBlockId}/Storage/{StorageId}/Volumes/{VolumeId} /redfish/v1/CompositionService/ResourceBlocks/{ResourceBlockId}/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId} /redfish/v1/ResourceBlocks/{ResourceBlockId}/Storage/{StorageId}/Volumes/{VolumeId} /redfish/v1/ResourceBlocks/{ResourceBlockId}/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId} /redfish/v1/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId}/Volumes/{VolumeId} /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingVolumes/{VolumeId} /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedVolumes/{VolumeId} /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/ProvidingVolumes/{VolumeId} /redfish/v1/Storage/{StorageId}/Volumes/{VolumeId} /redfish/v1/StorageServices/{StorageServiceId}/ConsistencyGroups/{ConsistencyGroupId}/Volumes/{VolumeId} /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingVolumes/{VolumeId} /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/AllocatedVolumes/{VolumeId} /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/ProvidingVolumes/{VolumeId} /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId} /redfish/v1/StorageServices/{StorageServiceId}/Volumes/{VolumeId}/CapacitySources/{CapacitySourceId}/ProvidingVolumes/{ProvidingVolumeId} /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId}/Volumes/{VolumeId} /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingVolumes/{VolumeId} /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedVolumes/{VolumeId} /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/ProvidingVolumes/{VolumeId} /redfish/v1/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes/{VolumeId}

**9.6.37.3 Properties** The properties defined for the Volume 1.8.0 schema are summarized in Table 134.

**Table 134:** Volume 1.8.0 properties

Property	Type	Attributes	Notes
<b>AccessCapabilities</b> (v1.1+) [ ]	array (string (enum))	<ul style="list-style-type: none"> <li>Each entry shall specify a current storage access read-capability. <i>For the possible property values, see AccessCapabilities in Property details.</i></li> <li>write</li> </ul>	<p>&lt;br&gt;{=html}(null)*</p>
<b>Actions</b>	object		The Actions property shall contain the available actions for this resource.
<b>#Volume.AssignReplTarget</b> (v1.4+) {}	object		This action shall be used to establish a replication relationship by assigning an existing volume to serve as a target replica for an existing source volume. <i>For more information, see the Actions section below.</i>
<b>#Volume.ChangeRAIDLAYOUT</b> (v1.5+) {}	object		This action shall request the system to change the RAID layout of the volume. Depending on the combination of the submitted parameters, this could be changing the RAID type, changing the span count, changing the number of drives used by the volume, or another configuration change supported by the system. Note that usage of this action while online may potentially cause data loss if the available capacity is reduced. <i>For more information, see the Actions section below.</i>

Property	Type	Attributes	Notes
<b>#VolumeCheckConsistency {}</b>	object		This defines the name of the custom action supported on this resource. <i>For more information, see the Actions section below.</i>
<b>#VolumeCreateReplicaTarget (v1.4+) {}</b>	object		This action shall be used to create a new volume resource to provide expanded data protection through a replica relationship with the specified source volume. <i>For more information, see the Actions section below.</i>
<b>#VolumeForceEnabled (v1.5+) {}</b>	object		This action shall request the system to force the volume to enabled state regardless of data loss scenarios. <i>For more information, see the Actions section below.</i>
<b>#VolumeInitialize (v1.5+) {}</b>	object		This defines the name of the custom action supported on this resource. If InitializeMethod is not specified in the request body, but the property InitializeMethod is specified, the property InitializeMethod value should be used. If neither is specified, the InitializeMethod should be Foreground. <i>For more information, see the Actions section below.</i>

Property	Type	Attributes	Notes
<b>#Volume.RemoveReplication</b> (v1.4+) {}	object		This action shall be used to disable data synchronization between a source and target volume, remove the replication relationship, and optionally delete the target volume. <i>For more information, see the Actions section below.</i>
<b>#Volume.ResumeReplication</b> (v1.4+) {}	object		This action shall be used to resume the active data synchronization between a source and target volume, without otherwise altering the replication relationship. <i>For more information, see the Actions section below.</i>
<b>#Volume.ReverseReplication</b> (v1.4+) {}	object		This action shall be used to reverse the replication relationship between a source and target volume. <i>For more information, see the Actions section below.</i>
<b>#Volume.SplitReplication</b> (v1.4+) {}	object		This action shall be used to split the replication relationship and suspend data synchronization between a source and target volume. <i>For more information, see the Actions section below.</i>



Property	Type	Attributes	Notes
<b>#VolumeSuspension</b> (v1.4+) {} }	object		This action shall be used to suspend active data synchronization between a source and target volume, without otherwise altering the replication relationship. <i>For more information, see the Actions section below.</i>
<b>AllocatedPools</b> (v1.1+) { <b>@odata.id</b> }	object		The value of this property shall contain references to all storage pools allocated from this volume. Contains a link to a resource.
	string	<ul style="list-style-type: none"> <li>Link to Collection of <i>StoragePool</i>. See the read-StoragePool schema for details.</li> </ul> only*	
<b>BlockSizeBytes</b> }	integer (By)	<i>read-only</i> <i>&lt;br&gt;{=html}(null)</i>	This property shall contain size of the smallest addressable unit of the associated volume.
<b>Capacity</b> (v1.1+) {}	object		Information about the utilization of capacity allocated to this storage volume. For property details, see Capacity v1.0.0).

Property	Type	Attributes	Notes
<b>CapacityBytes</b>	integer (By)	<ul style="list-style-type: none"> <li>This property shall contain the size in bytes of read-the associated volume.</li> </ul>	write  {=html}(null)*
<b>CapacitySources (v1.1+)</b> [ { @odata.id } ]	array		Fully or partially consumed storage from a source resource. Each entry provides capacity allocation information from a named source resource.
<b>@odata.id</b>	string	read-write	Link to a CapacitySource resource. See the Links section and the <i>CapacitySource</i> schema for details.
<b>Compressed (v1.4+)</b>	boolean	<ul style="list-style-type: none"> <li>This property shall contain a boolean indicator if read-the Volume is currently utilizing compression or not.</li> </ul>	write (null)*
<b>*Deduplicated** (v1.4+)</b>	boolean	<ul style="list-style-type: none"> <li>This property shall contain a boolean indicator if read-the Volume is currently utilizing deduplication or not.</li> </ul>	write (null)*

Property	Type	Attributes	Notes
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
<b>Display Name</b> (v1.4+)	string	<ul style="list-style-type: none"> <li>read-string to name the volume.</li> <li>write (null)*</li> </ul>	
<b>Encrypted</b>	boolean	<ul style="list-style-type: none"> <li>read-the Volume is currently utilizing encryption or not.</li> <li>write (null)*</li> </ul>	
<b>EncryptionTypes</b> []	array (string (enumeration))	read-write	This property shall contain the types of encryption used by this Volume. <i>For the possible property values, see EncryptionTypes in Property details.</i>
<ul style="list-style-type: none"> <li><b>*Id**</b></li> </ul>	string	read-only required	This property shall contain the identifier for this resource. The value shall conform with the 'Id' clause of the Redfish Specification.
<b>Identifiers</b> [{ }]	array (object)		This property shall contain a list of all known durable names for the associated volume. For property details, see Identifier v1.14.1).

Property	Type	Attributes	Notes
<b>InitializeMethod</b> (v1.6+)	string (enum)	read-only  {=html}(null)	This property shall indicate the initialization method used for this volume. If InitializeMethod is not specified, the InitializeMethod should be Foreground. This value reflects the most recently used Initialization Method, and may be changed using the Initialize Action. <i>For the possible property values, see InitializeMethod in Property details.</i>
<b>IOPerformanceEnabled</b> (v1.5+)	boolean		<ul style="list-style-type: none"> <li>This property shall indicate whether IO read-performance mode is enabled for the volume.</li> </ul>
<b>IOStatistics</b> (v1.2+)	object		The value shall represent IO statistics for this volume. For property details, see IOStatistics.
<b>IsBootCapable</b> (v1.7+)	boolean		<ul style="list-style-type: none"> <li>This property shall indicate whether or not the read-Volume contains a boot image and is capable of booting. This property may be settable by an writeadmin or client with visibility into the contents (of the volume. This property should only be set null)* to true when VolumeUsage is either not specified, or when VolumeUsage is set to Data or SystemData.</li> </ul>

Property	Type	Attributes	Notes
<b>Links</b> {	object		The Links property, as described by the Redfish Specification, shall contain references to resources that are related to, but not contained by (subordinate to), this resource.
<b>CacheDataVolumes</b> (v1.6+) [ {	array		This shall be a pointer to the cache data volumes this volume serves as a cache volume. The corresponding VolumeUsage property shall be set to CacheOnly when this property is used.
<b>@odata.id</b>	string	• read-only*	Link to another Volume resource.
}			
<b>CacheVolumeSource</b> (v1.6+) {	object	* (null)*	This shall be a pointer to the cache volume source for this volume. The corresponding VolumeUsage property shall be set to Data when this property is used.
<b>@odata.id</b>	string	• read-only*	Link to another Volume resource.
}			
<b>ClassOfService</b> (v1.1+) {	object		This property shall contain a reference to the ClassOfService that this storage volume conforms to. See the <i>ClassOfService</i> schema for details on this property.

Property	Type	Attributes	Notes
<b>@odata.id</b> }	string	<ul style="list-style-type: none"> <li>Link to a <i>ClassOfService</i> resource. See the Links read-section and the <i>ClassOfService</i> schema for details.</li> </ul>	only*
<b>ClientEndpoints</b> (v1.4+) [ {	array		The value of this property shall be references to the client Endpoints this volume is associated with.
<b>@odata.id</b> }	string (URI)	<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul>	only*
<b>ConsistencyGroups</b> ** (v1.4+) [ {	array		The value of this property shall be references to the ConsistencyGroups this volume is associated with.
<b>@odata.id</b> }	string	<ul style="list-style-type: none"> <li>Link to a <i>ConsistencyGroup</i> resource. See the read-Links section and the <i>ConsistencyGroup</i> schema for details.</li> </ul>	only*

Property	Type	Attributes	Notes
<b>DedicatedSpareDrives</b> (v1.2+) [ {	array		The value of this property shall be a reference to the resources that this volume is associated with and shall reference resources of type Drive. This property shall only contain references to Drive entities which are currently assigned as a dedicated spare and are able to support this Volume.
<b>@odata.id</b>	string (URI)	•	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
}]			
<b>Drives</b> [ {	array		The value of this property shall be a reference to the resources that this volume is associated with and shall reference resources of type Drive. This property shall only contain references to Drive entities which are currently members of the Volume, not hot spare Drives which are not currently a member of the volume.
<b>@odata.id</b>	string (URI)	•	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
}]			
<b>JournalingMedia</b> (v1.5+) {	object	• (null)*	This shall be a pointer to the journaling media used for this Volume to address the write hole issue. Valid when WriteHoleProtectionPolicy property is set to 'Journaling'.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string (URI)	•	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
<b>Oem</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>OwnershipStorageResource (v1.5+)</b>	object		This shall be a pointer to the Storage resource that owns or contains this volume.
<b>@odata.id</b>	string (URI)	•	The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification. only*
<b>OwnershipStorageService (v1.4+)</b>	object		This shall be a pointer to the StorageService that owns or contains this volume. See the <i>StorageService</i> schema for details on this property.



Property	Type	Attributes	Notes
<b>@odata.id</b>	string		<ul style="list-style-type: none"> <li>Link to a StorageService resource. See the Links read-section and the <i>StorageService</i> schema for details.</li> </ul>
<b>ServerEndpoints</b> (v1.4+) [ {	array		The value of this property shall be references to the server Endpoints this volume is associated with.
<b>@odata.id</b>	string (URI)		<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul>
<b>SpareResourceSets</b> (v1.3+) [ {	array		Each referenced SpareResourceSet shall contain resources that may be utilized to replace the capacity provided by a failed resource having a compatible type.
<b>@odata.id</b>	string	read-write	Link to a SpareResourceSet resource. See the Links section and the <i>SpareResourceSet</i> schema for details.
<b>StorageGroups</b> (v1.4+) [ {	array		The value of this property shall be references to the StorageGroups this volume is associated with.

Property	Type	Attributes	Notes
<b>@odata.id</b>	string	•	Link to a StorageGroup resource. See the Links read-section and the <i>StorageGroup</i> schema for details. only*
}}]			
}			
• <b>LogicalUnitNumber</b>	integer	read-only (null)	This property shall contain host-visible LogicalUnitNumber assigned to this Volume. This property shall only be used when in a single connect configuration and no StorageGroup configuration is used.
• <b>LowSpaceWarningThresholdPercent</b>	array of integers, min=0, max=100, nonnull	read-write	Each time the following value is less than one of the values in the array the LOW_SPACE_THRESHOLD_WARNING event shall be triggered: Across all CapacitySources entries, percent = (SUM(AllocatedBytes) - SUM(ConsumedBytes))/SUM(AllocatedBytes).

Property	Type	Attributes	Notes
<ul style="list-style-type: none"> <li>Manufacturer** (v1.1+)</li> </ul>	string	read-only (null)	This property shall contain a value that represents the manufacturer or implementer of the storage volume.
<ul style="list-style-type: none"> <li>MaxBlockSize** (v1.1+)</li> </ul>	integer (By)	read-only  {=html}(null)	This property shall contain size of the largest addressable unit of this storage volume.
<b>MediaSpanCount</b> (v1.4+)	integer	read-only (null)	This property shall indicate the number of media elements used per span in the secondary RAID for a hierarchical RAID type.
<b>Model</b> (v1.1+)	string	read-only (null)	The value is assigned by the manufacturer and shall represents a specific storage volume implementation.
<b>Name</b>	string	read-only required	This property shall contain the name of this resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification.
<b>NVMeNamespaces</b> (v1.5+) {	object	*(null)*	This property shall contain properties to use when Volume is used to describe an NVMe Namespace.

Property	Type	Attributes	Notes
<b>FormatLBASize</b> (v1.5+)	string	read-only (null)	This property shall contain the LBA data size and metadata size combination that the namespace has been formatted with. This is a 4-bit data structure.
<b>IsShareable</b> (v1.5+)	boolean	<ul style="list-style-type: none"> <li>This property shall indicate whether the read-namespace is shareable.</li> </ul> write (null)*	
<b>LBASupported</b> (v1.8+) []	array (string (enumeration))	read-only (html)(null)	This shall be a list of the LBA formats supported for the namespace, or potential namespaces. <i>For the possible property values, see LBAFormatsSupported in Property details.</i>
<b>MetadataTransferredAtEndOfDataLBA</b> (v1.5+)	boolean	read-only (null)	This property shall indicate whether or not the metadata is transferred at the end of the LBA creating an extended data LBA.
<b>NamespaceFeatures</b> (v1.5+) {	object	*(null)*	This property shall contain a set of Namespace Features.

Property	Type	Attributes	Notes
<b>SupportsAtomicTransactionsSize</b> (v1.5+)	boolean	<i>read-only (null)</i>	This property shall indicate whether or not the NVM fields for Namespace preferred write granularity (NPWG), write alignment (NPWA), deallocate granularity (NPDG), deallocate alignment (NPDA) and optimal write size (NOWS) are defined for this namespace and should be used by the host for I/O optimization.
<b>SupportsDeallocatedOrUnwrittenLogicalBlockError</b> (v1.5+)	boolean	<i>read-only (null)</i>	This property shall indicate that the controller supports deallocated or unwritten logical block error for this namespace.
<b>SupportsNamespaceAtomicWriteUnitNormal, Namespace Atomic Write Unit Power Fail, and Namespace Atomic Compare and Write Unit</b> (v1.5+)	boolean	<i>read-only (null)</i>	This property shall indicate that the Namespace Atomic Write Unit Normal (NAWUN), Namespace Atomic Write Unit Power Fail (NAWUPF), and Namespace Atomic Compare and Write Unit (NACWU) fields are defined for this namespace and should be used by the host for this namespace instead of the controller-level properties AWUN, AWUPF, and ACWU.
<b>SupportsNamespaceGUIDReuse</b> (v1.5+)	boolean	<i>read-only (null)</i>	This property shall indicate that the namespace supports the use of an NGUID (namespace globally unique identifier) value.

Property	Type	Attributes	Notes
<b>SupportsThinProvisioning</b> (v1.5+)	boolean	read-only (null)	This property shall indicate whether or not the NVMe Namespace supports thin provisioning. Specifically, the namespace capacity reported may be less than the namespace size.
<b>NamespaceIdentifier</b> (v1.5+)	string	read-only (null)	This property shall contain the NVMe Namespace Identifier for this namespace. This property shall be a hex value. Namespace identifiers are not durable and do not have meaning outside the scope of the NVMe subsystem. NSID 0x0, 0xFFFFFFFF, 0xFFFFFFFFE are special purpose values. Pattern: ^0[xX]([a-fA-F]
<b>NumberLBAFormatAttributes</b> (v1.5+)	integer (By)	read-only (null)	This property shall contain the number of LBA data size and metadata size combinations supported by this namespace. The value of this property is between 0 and 16. LBA formats with an index set beyond this value will not be supported.
<b>NVMeVersion</b> (v1.5+)	string	read-only (null)	This property shall contain the version of the NVMe Base Specification supported.
<b>Oem</b> {}	object		This property shall contain the OEM extensions. All values for properties that this object contains shall conform to the Redfish Specification-described requirements. For property details, see Oem.
<b>Operations</b> [ {	array		This property shall contain a list of all currently running on the Volume.

Property	Type	Attributes	Notes
<b>AssociatedFeaturesRegistry</b> <b>@odata.id</b>	object  string		This resource shall be used to represent a Feature registry for a Redfish implementation. See the <i>FeaturesRegistry</i> schema for details on this property.  • Link to a FeaturesRegistry resource. See the read-Links section and the <i>FeaturesRegistry</i> schema for details. only*
<b>OperationName</b>	string	read-only (null)	The name of the operation.
<b>PercentageComplete</b>	integer	read-only (null)	The percentage of the operation that has been completed.
<b>OptimumIOSizeBytes</b>	integer (By)	read-only  {=html}(null)	This property shall contain the optimum IO size to use when performing IO on this volume. For logical disks, this is the stripe size. For physical disks, this describes the physical sector size.
<b>ProvisioningPolicy</b> (v1.4+)	string (enum)	•	This property shall specify the volume's read-supported storage allocation policy. <i>For the possible property values, see ProvisioningPolicy writein Property details.</i>  {=html}(null)*

Property	Type	Attributes	Notes
<b>RAIDType</b> (v1.3.1+)	string (enum)	<i>read-only</i>  {html}(null)	This property shall contain the RAID type of the associated Volume. <i>For the possible property values, see RAIDType in Property details.</i>
<b>ReadCachePolicy</b> (v1.4+)	string (enum)	<ul style="list-style-type: none"> <li>This property shall contain a boolean indicator read-of the read cache policy for the Volume. <i>For the possible property values, see ReadCachePolicy in writeProperty details.</i></li> </ul>  {html}(null)*	
<b>ReadableCapacitySourceCount</b> (v1.3+)	integer	<ul style="list-style-type: none"> <li>The value is the number of available capacity read-source resources currently available in the event that an equivalent capacity source resource fails.</li> </ul> write (null)*	
<b>RemainingCapacityPercent</b> (v1.2+)	integer	<i>read-only</i> (null)	If present, this value shall return $\{[(\text{SUM}(\text{AllocatedBytes}) - \text{SUM}(\text{ConsumedBytes}))/\text{SUM}(\text{AllocatedBytes})]*100\}$ represented as an integer value.
<b>RemoteReplicaTargets</b> (v1.8+) []	array (string, null)	<ul style="list-style-type: none"> <li>The value shall reference the URIs to the remote read-target replicas that are sourced by this replica. Remote indicates that the replica is managed by only*a separate Swordfish service instance.</li> </ul>	



Property	Type	Attributes	Notes
<b>ReplicaInfo</b> (v1.1+) {}	object		This property shall describe the replica relationship between this storage volume and a corresponding source volume. For property details, see ReplicaInfo v1.4.0).
<b>ReplicaTargets</b> (v1.3+) [ {	array		The value shall reference the target replicas that are sourced by this replica.
<b>@odata.id</b>	string (URI)	<ul style="list-style-type: none"> <li>The value of this property shall be the unique read-identifier for the resource and it shall be of the form defined in the Redfish specification.</li> </ul>	only*
}			
}			
<b>Status</b> {}	object		The property shall contain the status of the Volume. For property details, see Status.
<b>StorageGroups</b> (v1.1+) {	object		The value of this property shall contain references to all storage groups that include this volume. Contains a link to a resource.
<b>@odata.id</b>	string	<ul style="list-style-type: none"> <li>Link to Collection of <i>StorageGroup</i>. See the read-StorageGroup schema for details.</li> </ul>	only*
}			

Property	Type	Attributes	Notes
<b>StripesByBytes</b> (v1.4+)	integer (By)	<ul style="list-style-type: none"> <li>read-only</li> </ul>	The number of consecutively addressed virtual read-disk blocks (bytes) mapped to consecutively addressed blocks on a single member extent of a writedisk array. Synonym for stripe depth and chunk size.  {=html}(null)*
<b>VolumeType</b>	string (enum)	<ul style="list-style-type: none"> <li>read-only</li> </ul>	This property shall contain the type of the associated Volume. <i>For the possible property values, see VolumeType in Property details.</i>
<b>VolumeUsage</b> (v1.4+)	string (enum)	<ul style="list-style-type: none"> <li>read-only</li> </ul>	This property shall contain the volume usage type for the Volume. <i>For the possible property values, see VolumeUsage in Property details.</i>
<b>WriteCachePolicy</b> (v1.4+)	string (enum)	<ul style="list-style-type: none"> <li>read-only</li> </ul>	This property shall contain a boolean indicator read-of the write cache policy for the Volume. <i>For the possible property values, see WriteCachePolicy in writeProperty details.</i>  {=html}(null)*
<b>WriteCacheState</b> (v1.4+)	string (enum)	<ul style="list-style-type: none"> <li>read-only</li> </ul>	This property shall contain the WriteCacheState policy setting for the Volume. <i>For the possible property values, see WriteCacheState in Property details.</i>

Property	Type	Attributes	Notes
<b>WriteHoleProtectionPolicy</b> (v1.4+)	string (enum)	read-write	This property specifies the policy that is enabled to address the write hole issue on the RAID volume. If no policy is enabled at the moment, this property shall be set to 'Off'. <i>For the possible property values, see WriteHoleProtectionPolicy in Property details.</i>

#### 9.6.37.4 Actions

##### 9.6.37.4.1 AssignReplicaTarget (v1.4+) Description

This action shall be used to establish a replication relationship by assigning an existing volume to serve as a target replica for an existing source volume.

**Action URI:** {Base URI of target resource}/Actions/Volume.AssignReplicaTarget

##### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.37.4.1. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **ReplicaType** | string (enum) | *required* | This parameter shall contain the type of replica relationship to be created (e.g., Clone, Mirror, Snap). *For the possible property values, see ReplicaType in Property details.* | | **ReplicaUpdateMode** | string (enum) | *required* | This parameter shall specify the replica update mode. *For the possible property values, see ReplicaUpdateMode in Property details.* | | **TargetVolume** | string | *required* | This parameter shall contain the Uri to the existing target volume. | Table: AssignReplicaTarget action parameters

##### 9.6.37.4.2 ChangeRAIDLayout (v1.5+) Description

This action shall request the system to change the RAID layout of the volume. Depending on the combination of the submitted parameters, this could be changing the RAID type, changing the span count, changing the number of drives used by the volume, or another configuration change supported by the system. Note that usage of this action while online may potentially cause data loss if the available capacity is reduced.

**Action URI: {Base URI of target resource}/Actions/Volume.ChangeRAIDLayout****Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.37.4.2. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **Drives** [ { | array | *optional* | This parameter shall contain an array of the drives to be used by the volume. | | **@odata.id** | string (URI) | *read-only* | The value of this property shall be the unique identifier for the resource and it shall be of the form defined in the Redfish specification. | | } ] | | **MediaSpanCount** | integer | *optional* | This parameter shall contain the requested number of media elements used per span in the secondary RAID for a hierarchical RAID type. | | **RAIDType** | string (enum) | *optional* | This parameter shall contain the requested RAID type for the volume. *For the possible property values, see RAIDType in Property details.* | | **StripSizeBytes** | integer | *optional* | This parameter shall contain the number of blocks (bytes) requested for the strip size. | Table: ChangeRAIDLayout action parameters

**9.6.37.4.3 CheckConsistency Description**

This defines the name of the custom action supported on this resource.

**Action URI: {Base URI of target resource}/Actions/Volume.CheckConsistency****Action parameters**

This action takes no parameters.

**9.6.37.4.4 CreateReplicaTarget (v1.4+) Description**

This action shall be used to create a new volume resource to provide expanded data protection through a replica relationship with the specified source volume.

**Action URI: {Base URI of target resource}/Actions/Volume.CreateReplicaTarget****Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.37.4.4. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **ReplicaType** | string (enum) | *required* | This parameter shall contain the type of replica relationship to be created (e.g., Clone, Mirror, Snap). *For the possible property values, see ReplicaType in Property details.* | | **ReplicaUpdateMode** | string (enum) | *required* | This parameter shall specify the replica update mode. *For the possible property values, see*

*ReplicaUpdateMode* in *Property details*. || **TargetStoragePool** | string | *required* | This parameter shall contain the Uri to the existing StoragePool in which to create the target volume. || **VolumeName** | string | *optional* | This parameter shall contain the Name for the target volume. | Table: CreateReplicaTarget action parameters

#### 9.6.37.4.5 ForceEnable (v1.5+) Description

This action shall request the system to force the volume to enabled state regardless of data loss scenarios.

**Action URI:** {Base URI of target resource}/Actions/Volume.ForceEnable

##### Action parameters

This action takes no parameters.

#### 9.6.37.4.6 Initialize (v1.5+) Description

This defines the name of the custom action supported on this resource. If InitializeMethod is not specified in the request body, but the property InitializeMethod is specified, the property InitializeMethod value should be used. If neither is specified, the InitializeMethod should be Foreground.

**Action URI:** {Base URI of target resource}/Actions/Volume.Initialize

##### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.37.4.6. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | || **InitializeMethod** | string (enum) | *optional* | This defines the property name for the action. *For the possible property values, see InitializeMethod in Property details.* || **InitializeType** | string (enum) | *optional* | This defines the property name for the action. *For the possible property values, see InitializeType in Property details.* | Table: Initialize action parameters

#### 9.6.37.4.7 RemoveReplicaRelationship (v1.4+) Description

This action shall be used to disable data synchronization between a source and target volume, remove the replication relationship, and optionally delete the target volume.

**Action URI:** {Base URI of target resource}/Actions/Volume.RemoveReplicaRelationship

##### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.37.4.7. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **DeleteTargetVolume** | boolean | *optional* | This parameter shall indicate whether or not to delete the target volume as part of the operation. If not defined, the system should use its default behavior. | | **TargetVolume** | string | *required* | This parameter shall contain the Uri to the existing target volume. | Table: RemoveReplicaRelationship action parameters

#### 9.6.37.4.8 ResumeReplication (v1.4+) Description

This action shall be used to resume the active data synchronization between a source and target volume, without otherwise altering the replication relationship.

**Action URI:** {Base URI of target resource}/Actions/Volume.ResumeReplication

##### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.37.4.8. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **TargetVolume** | string | *required* | This parameter shall contain the Uri to the existing target volume. | Table: ResumeReplication action parameters

#### 9.6.37.4.9 ReverseReplicationRelationship (v1.4+) Description

This action shall be used to reverse the replication relationship between a source and target volume.

**Action URI:** {Base URI of target resource}/Actions/Volume.ReverseReplicationRelationship

##### Action parameters

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.37.4.9. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **TargetVolume** | string | *required* | This parameter shall contain the Uri to the existing target volume. | Table: ReverseReplicationRelationship action parameters

#### 9.6.37.4.10 SplitReplication (v1.4+) Description

This action shall be used to split the replication relationship and suspend data synchronization between a source and target volume.

**Action URI:** {Base URI of target resource}/Actions/Volume.SplitReplication

**Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.37.4.10. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **TargetVolume** | string | *required* | This parameter shall contain the Uri to the existing target volume. |

Table: SplitReplication action parameters

**9.6.37.4.11 SuspendReplication (v1.4+) Description**

This action shall be used to suspend active data synchronization between a source and target volume, without otherwise altering the replication relationship.

**Action URI:** {Base URI of target resource}/Actions/Volume.SuspendReplication

**Action parameters**

The parameters for the action which are included in the POST body to the URI shown in the 'target' property of the Action are summarized in Table 9.6.37.4.11. | Parameter Name | Type | Attributes | Notes | | :— | :— | :— | :— | | **TargetVolume** | string | *required* | This parameter shall contain the Uri to the existing target volume. |

Table: SuspendReplication action parameters

**9.6.37.5 Property details**

**9.6.37.5.1 AccessCapabilities:** The defined property values are listed in Table 135. Each entry shall specify a current storage access capability.

**Table 135:** AccessCapabilities property values ##### EncryptionTypes:

string	Description
Append	This enumeration literal shall indicate that the storage may be written only to append.
Execute	This value shall indicate that Execute access is allowed by the file share.
Read	This enumeration literal shall indicate that the storage may be read.
Streaming	This enumeration literal shall indicate that the storage may be read sequentially.

string	Description
Write	This enumeration literal shall indicate that the storage may be written multiple times.
WriteOnce	This enumeration literal shall indicate that the storage may be written only once.

The defined property values are listed in Table 136. This property shall contain the types of encryption used by this Volume.

**Table 136:** EncryptionTypes property values ##### InitializeMethod:

string	Description
Contr ollerAssisted	The volume is being encrypted by the storage controller entity.
NativeDr iveEncryption	The volume is utilizing the native drive encryption capabilities of the drive hardware.
Sof twareAssisted	The volume is being encrypted by software running on the system or the operating system.

The defined property values are listed in Table 137. This defines the property name for the action.

**Table 137:** InitializeMethod property values ##### InitializeType:

string	Description
Background	The volume will be available for use immediately, with data erasure and preparation to happen as background tasks.
Foreground	Data erasure and preparation tasks will complete before the volume is presented as available for use.
Skip	The volume will be available for use immediately, with no preparation.

The defined property values are listed in Table 138. This defines the property name for the action.



**Table 138:** InitializeType property values ##### LBAFormatsSupported:

string	Description
Fast	The volume is prepared for use quickly, typically by erasing just the beginning and end of the space so that partitioning can be performed.
Slow	The volume is prepared for use slowly, typically by completely erasing the volume.

The defined property values are listed in Table 139. This shall be a list of the LBA formats supported for the namespace, or potential namespaces.

**Table 139:** LBAFormatsSupported property values ##### ProvisioningPolicy:

string	Description
LBAFormat0	LBAFormat0 is a required type. Indicates the LBA data size supported.
LBAFormat1	Indicates the LBA data size if supported.
LBAFormat10	Indicates the LBA data size supported if supported.
LBAFormat11	Indicates the LBA data size supported if supported.
LBAFormat12	Indicates the LBA data size supported if supported.
LBAFormat13	Indicates the LBA data size supported if supported.
LBAFormat14	Indicates the LBA data size supported if supported.
LBAFormat15	Indicates the LBA data size supported if supported.
LBAFormat2	Indicates the LBA data size supported if supported.
LBAFormat3	Indicates the LBA data size supported if supported.
LBAFormat4	Indicates the LBA data size supported if supported.
LBAFormat5	Indicates the LBA data size supported if supported.
LBAFormat6	Indicates the LBA data size supported if supported.
LBAFormat7	Indicates the LBA data size supported if supported.
LBAFormat8	Indicates the LBA data size supported if supported.

string	Description
LBAFormat9	Indicates the LBA data size supported if supported.

The defined property values are listed in Table 140. This property shall specify the volume's supported storage allocation policy.

**Table 140:** ProvisioningPolicy property values ##### RAIDType:

string	Description
Fixed	This enumeration literal specifies storage shall be fully allocated.
Thin	This enumeration literal specifies storage may be over allocated.

The defined property values are listed in Table 141. This parameter shall contain the requested RAID type for the volume.

**Table 141:** RAIDType property values ##### ReadCachePolicy:

string	Description
None (v1.4.2+)	A placement policy with no redundancy at the device level.
RAID0	A placement policy where consecutive logical blocks of data are uniformly distributed across a set of independent storage devices without offering any form of redundancy. This is commonly referred to as data striping. This form of RAID will encounter data loss with the failure of any storage device in the set.
RAID00	A placement policy that creates a RAID 0 stripe set over two or more RAID 0 sets. This is commonly referred to as RAID 0+0. This form of data layout is not fault tolerant; if any storage device fails there will be data loss.

string	Description
RAID01	A data placement policy that creates a mirrored device (RAID 1) over a set of striped devices (RAID 0). This is commonly referred to as RAID 0+1 or RAID 0/1. Data stored using this form of RAID is able to survive a single RAID 0 data set failure without data loss.
RAID1	A placement policy where each logical block of data is stored on more than one independent storage device. This is commonly referred to as mirroring. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID10	A placement policy that creates a striped device (RAID 0) over a set of mirrored devices (RAID 1). This is commonly referred to as RAID 1/0. Data stored using this form of RAID is able to survive storage device failures in each RAID 1 set without data loss.
RAID10E	A placement policy that uses a RAID 0 stripe set over two or more RAID 10 sets. This is commonly referred to as Enhanced RAID 10. Data stored using this form of RAID is able to survive a single device failure within each nested RAID 1 set without data loss.
RAID10Triple	A placement policy that uses a striped device (RAID 0) over a set of triple mirrored devices (RAID 1Triple). This form of RAID can survive up to two failures in each triple mirror set without data loss.
RAID1E	A placement policy that uses a form of mirroring implemented over a set of independent storage devices where logical blocks are duplicated on a pair of independent storage devices so that data is uniformly distributed across the storage devices. This is commonly referred to as RAID 1 Enhanced. Data stored using this form of RAID is able to survive a single storage device failure without data loss.

string	Description
RAID1Triple	A placement policy where each logical block of data is mirrored three times across a set of three independent storage devices. This is commonly referred to as three-way mirroring. This form of RAID can survive two device failures without data loss.
RAID3	A placement policy using parity-based protection where logical bytes of data are uniformly distributed across a set of independent storage devices and where the parity is stored on a dedicated independent storage device. Data stored using this form of RAID is able to survive a single storage device failure without data loss. If the storage devices use rotating media, they are assumed to be rotationally synchronized, and the data stripe size should be no larger than the exported block size.
RAID4	A placement policy using parity-based protection where logical blocks of data are uniformly distributed across a set of independent storage devices and where the parity is stored on a dedicated independent storage device. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID5	A placement policy using parity-based protection for storing stripes of 'n' logical blocks of data and one logical block of parity across a set of 'n+1' independent storage devices where the parity and data blocks are interleaved across the storage devices. Data stored using this form of RAID is able to survive a single storage device failure without data loss.
RAID50	A placement policy that uses a RAID 0 stripe set over two or more RAID 5 sets of independent storage devices. Data stored using this form of RAID is able to survive a single storage device failure within each RAID 5 set without data loss.

string	Description
RAID6	A placement policy using parity-based protection for storing stripes of 'n' logical blocks of data and two logical blocks of independent parity across a set of 'n+2' independent storage devices where the parity and data blocks are interleaved across the storage devices. Data stored using this form of RAID is able to survive any two independent storage device failures without data loss.
RAID60	A placement policy that uses a RAID 0 stripe set over two or more RAID 6 sets of independent storage devices. Data stored using this form of RAID is able to survive two device failures within each RAID 6 set without data loss.
RAID6TP	A placement policy that uses parity-based protection for storing stripes of 'n' logical blocks of data and three logical blocks of independent parity across a set of 'n+3' independent storage devices where the parity and data blocks are interleaved across the storage devices. This is commonly referred to as Triple Parity RAID. Data stored using this form of RAID is able to survive any three independent storage device failures without data loss.

The defined property values are listed in Table 142. This property shall contain a boolean indicator of the read cache policy for the Volume.

**Table 142:** ReadCachePolicy property values ##### ReplicaType:

string	Description
AdaptiveReadAhead	A caching technique in which the controller dynamically determines whether to pre-fetch data anticipating future read requests, based on previous cache hit ratio.
Off	The read cache is disabled.
ReadAhead	A caching technique in which the controller pre-fetches data anticipating future read requests.

The defined property values are listed in Table 143. This parameter shall contain the

type of replica relationship to be created (e.g., Clone, Mirror, Snap).

**Table 143:** ReplicaType property values ##### ReplicaUpdateMode:

string	Description
Clone	This enumeration literal shall indicate that replication shall create a point in time, full copy the source.
Mirror	This enumeration literal shall indicate that replication shall create and maintain a copy of the source.
Snapshot	This enumeration literal shall indicate that replication shall create a point in time, virtual copy of the source.
T okenizedClone	This enumeration literal shall indicate that replication shall create a token based clone.

The defined property values are listed in Table 144. This parameter shall specify the replica update mode.

**Table 144:** ReplicaUpdateMode property values ##### VolumeType:

string	Description
Active	This enumeration literal shall indicate Active-Active (i.e. bidirectional) synchronous updates.
Adaptive	This enumeration literal shall indicate that an implementation may switch between synchronous and asynchronous modes.
Asynchronous	This enumeration literal shall indicate Asynchronous updates.
Synchronous	This enumeration literal shall indicate Synchronous updates.

The defined property values are listed in Table 145. This property shall contain the type of the associated Volume.

**Table 145:** VolumeType property values ##### VolumeUsage:

string	Description
Mirrored	The volume is a mirrored device.
NonRedundant	The volume is a non-redundant storage device.
RawDevice	The volume is a raw physical device without any RAID or other virtualization applied.
SpannedMirrors	The volume is a spanned set of mirrored devices.
SpannedStripesWithParity	The volume is a spanned set of devices which uses parity to retain redundant information.
StripedWithParity	The volume is a device which uses parity to retain redundant information.

The defined property values are listed in Table 146. This property shall contain the volume usage type for the Volume.

**Table 146:** VolumeUsage property values ##### WriteCachePolicy:

string	Description
CacheOnly	The volume shall be allocated for use as a non-consumable cache only volume.
Data	The volume shall be allocated for use as a consumable data volume.
ReplicationReserve	The volume shall be allocated for use as a non-consumable reserved volume for replication use.
SystemData	The volume shall be allocated for use as a consumable data volume reserved for system use.
SystemReserve	The volume shall be allocated for use as a non-consumable system reserved volume.

The defined property values are listed in Table 147. This property shall contain a boolean indicator of the write cache policy for the Volume.

**Table 147:** WriteCachePolicy property values ##### WriteCacheState:

string	Description
Off (v1.4.1+)	Indicates that the write cache shall be disabled.
Prote ctedWriteBack	A caching technique in which the completion of a write request is signaled as soon as the data is in cache, and actual writing to non-volatile media is guaranteed to occur at a later time.
Unprote ctedWriteBack	A caching technique in which the completion of a write request is signaled as soon as the data is in cache; actual writing to non-volatile media is not guaranteed to occur at a later time.
WriteThrough	A caching technique in which the completion of a write request is not signaled until data is safely stored on non-volatile media.

The defined property values are listed in Table 148. This property shall contain the WriteCacheState policy setting for the Volume.

**Table 148:** WriteCacheState property values ##### WriteHoleProtectionPolicy:

string	Description
Degraded	Indicates an issue with the cache state in which the cache space is diminished or disabled due to a failure or an outside influence such as a discharged battery.
Protected	Indicates that the cache state type in use generally protects write requests on non-volatile media.
Unprotected	Indicates that the cache state type in use generally does not protect write requests on non-volatile media.

The defined property values are listed in Table 149. This property specifies the policy that is enabled to address the write hole issue on the RAID volume. If no policy is enabled at the moment, this property shall be set to 'Off'.



**Table 149:** WriteHoleProtectionPolicy property values

string	Description
DistributedLog	The policy that distributes additional log (e.g. checksum of the parity) among the volume's capacity sources to address write hole issue. Additional data is used to detect data corruption on the volume.
Journaling	The policy that uses separate block device for write-ahead logging to address write hole issue. All write operations on the RAID volume are first logged on dedicated journaling device that is not part of the volume.
Oem	The policy that is Oem specific. The mechanism details are unknown unless provided separately by the Oem.
Off	The support for addressing the write hole issue is disabled. The volume is not performing any additional activities to close the RAID write hole.

### 9.6.38 VolumeCollection

**9.6.38.1 URIs** /redfish/v1/CompositionService/ResourceBlocks/{ResourceBlockId}/Storage/{StorageId}/Volumes /redfish/v1/CompositionService/ResourceBlocks/{ResourceBlockId}/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes /redfish/v1/ResourceBlocks/{ResourceBlockId}/Storage/{StorageId}/Volumes /redfish/v1/ResourceBlocks/{ResourceBlockId}/Systems/{ComputerSystemId}/Storage/{StorageId}/Volumes /redfish/v1/Storage/{StorageId}/ConsistencyGroups/{ConsistencyGroupId}/Volumes /redfish/v1/Storage/{StorageId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingVolumes /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/AllocatedVolumes /redfish/v1/Storage/{StorageId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/ProvidingVolumes /redfish/v1/Storage/{StorageId}/Volumes /redfish/v1/StorageServices/{StorageServiceId}/ConsistencyGroups/{ConsistencyGroupId}/Volumes /redfish/v1/StorageServices/{StorageServiceId}/FileSystems/{FileSystemId}/CapacitySources/{CapacitySourceId}/ProvidingVolumes /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/AllocatedVolumes /redfish/v1/StorageServices/{StorageServiceId}/StoragePools/{StoragePoolId}/CapacitySources/{CapacitySourceId}/ProvidingVolumes /redfish/v1/StorageServices/{StorageServiceId}/Volumes

*celId*}/Volumes /redfish/v1/StorageServices/{*StorageServiceId*}/Volumes/{*VolumeId*}/  
 CapacitySources/{*CapacitySourceId*}/ProvidingVolumes /redfish/v1/Systems/  
 {*ComputerSystemId*}/Storage/{*StorageId*}/ConsistencyGroups/{*ConsistencyGroupId*}/  
 Volumes /redfish/v1/Systems/{*ComputerSystemId*}/Storage/{*StorageId*}/FileSystems/  
 {*FileSystemId*}/CapacitySources/{*CapacitySourceId*}/ProvidingVolumes /redfish/v1/  
 Systems/{*ComputerSystemId*}/Storage/{*StorageId*}/StoragePools/{*StoragePoolId*}/  
 AllocatedVolumes /redfish/v1/Systems/{*ComputerSystemId*}/Storage/{*StorageId*}/Stor-  
 agePools/{*StoragePoolId*}/CapacitySources/{*CapacitySourceId*}/ProvidingVolumes /  
 redfish/v1/Systems/{*ComputerSystemId*}/Storage/{*StorageId*}/Volumes

**9.6.38.2 Properties** The properties defined for the VolumeCollection schema are summarized in Table 150.

**Table 150:** VolumeCollection properties

Pro perty	Type	Attri butes	Notes
<b>Description</b>	string	read-only (null)	This property shall contain the description of this resource. The value shall conform with the 'Description' clause of the Redfish Specification.
• array *Members** [ {			The value of each member entry shall reference a Volume resource.
@odata.id	string	•	Link to a Volume resource. See the Links section read-and the <i>Volume</i> schema for details.
		only*	
}}			

Property	Type	Attributes	Notes
<b>Members@odata.nextLink</b>	string (URI)	<ul style="list-style-type: none"><li></li></ul>	The value of this property shall be a URI to a read-resource, with the same @odata.type, containing the next set of partial members. only*
<b>Name</b>	string	<ul style="list-style-type: none"><li></li></ul>	This property shall contain the name of this read-resource or array member. The value shall conform with the 'Name' clause of the Redfish Specification. only*
<b>Oem {}</b>	object		This property shall contain the OEM extensions. All values for properties contained in this object shall conform to the Redfish Specification-described requirements. For property details, see Oem.

## Annex A: Bibliography

### A.1 Overview

The following referenced documents provide important support for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

### A.2 Informational references

The informational references are summarized in Table A.1.

Tag	Title (Version)	Author	URL
Errors	Swordfish Scalable Storage Management Error Handling Guide	SNIA	< <a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/smi/swordfish</a> >
Metrics	Swordfish Metrics White Paper	SNIA	< <a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/smi/swordfish</a> >
NVMe	Swordfish NVMe Model Overview and Mapping Guide	SNIA	< <a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/smi/swordfish</a> >
Profiles	Swordfish Profile Bundle	SNIA	< <a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/smi/swordfish</a> >
Profiles	Swordfish Profile Bundle	SNIA	< <a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/smi/swordfish</a> >
Properties	Swordfish Property Guide	SNIA	< <a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/smi/swordfish</a> >
Schema	Swordfish Schema and Registries Bundle	SNIA	< <a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/smi/swordfish</a> >
Templates	Swordfish Templates Bundle	SNIA	< <a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/smi/swordfish</a> >
TLS	TLS Specification for Storage Systems	SNIA	< <a href="https://www.snia.org/tech_activities/standards/curr_standards/tls">https://www.snia.org/tech_activities/standards/curr_standards/tls</a> >

Tag	Title (Version)	Author	URL
Users Guide	Swordfish Scalable Storage Management API User's Guide	SNIA	< <a href="https://www.snia.org/forums/smi/swordfish">https://www.snia.org/forums/smi/swordfish</a> >

Table A.1: Informational References