

1



2

Jobs CDMI Extension

Version 2.0

3

4

5 ABSTRACT: This CDMI Extension is intended for developers who are considering a standardized way to add
6 functionality to CDMI. When multiple compatible implementations are demonstrated and approved by the Technical
7 Working Group, this extension will be incorporated into the CDMI standard.

8 This document has been released and approved by the SNIA. The SNIA believes that the ideas, methodologies, and
9 technologies described in this document accurately represent the SNIA goals and are appropriate for widespread
10 distribution. Suggestion for revision should be directed to <http://www.snia.org/feedback/>.

11

SNIA Working Draft

12

June 17, 2020

13 USAGE

14 Copyright © 2020 SNIA. All rights reserved. All other trademarks or registered trademarks are the property of their
15 respective owners.

16 The SNIA hereby grants permission for individuals to use this document for personal use only, and for corporations and
17 other business entities to use this document for internal use only (including internal copying, distribution, and display)
18 provided that:

19 1. Any text, diagram, chart, table or definition reproduced shall be reproduced in its entirety with no alteration, and,

20 2. Any document, printed or electronic, in which material from this document (or any portion hereof) is reproduced shall
21 acknowledge the SNIA copyright on that material, and shall credit the SNIA for granting permission for its reuse.

22 Other than as explicitly provided above, you may not make any commercial use of this document, sell any excerpt or
23 this entire document, or distribute this document to third parties. All rights not explicitly granted are expressly reserved
24 to SNIA.

25 Permission to use this document for purposes other than those enumerated above may be requested by emailing
26 tcmd@snia.org. Please include the identity of the requesting individual or company and a brief description of the pur-
27 pose, nature, and scope of the requested use.

28 All code fragments, scripts, data tables, and sample code in this SNIA document are made available under the following
29 license:

30 BSD 3-Clause Software License

31 Copyright (c) 2020, The Storage Networking Industry Association.

32 Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following
33 conditions are met:

34 * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

35 * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following
36 disclaimer in the documentation and/or other materials provided with the distribution.

37 * Neither the name of The Storage Networking Industry Association (SNIA) nor the names of its contributors may be
38 used to endorse or promote products derived from this software without specific prior written permission.

39 THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EX-
40 PRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MER-
41 CHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE
42 COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
43 EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUB-
44 STITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER
45 CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUD-
46 ING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF
47 ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

48 **DISCLAIMER**

49 The information contained in this publication is subject to change without notice. The SNIA makes no warranty of any
50 kind with regard to this specification, including, but not limited to, the implied warranties of merchantability and fitness for
51 a particular purpose. The SNIA shall not be liable for errors contained herein or for incidental or consequential damages
52 in connection with the furnishing, performance, or use of this specification.

53 Suggestions for revisions should be directed to <https://www.snia.org/feedback/>.

54 Copyright © 2020 SNIA. All rights reserved. All other trademarks or registered trademarks are the property of their
55 respective owners.

Contents

56

57	Clause 1: Jobs CDMI Extension	1
58	1.1 Overview	1
59	1.2 Instructions to the Editor	1
60	Clause 2: Jobs	3
61	2.1 Job Management	3
62	2.2 Job Creation	4
63	2.3 Job Object Metadata	4
64	2.4 Job Object Value	5
65	2.5 Examples	6
66	2.6 Job Lifecycle	7
67	2.7 Job Actions	7
68	2.8 Job Containers	8

69 Clause 1

70 Jobs CDMI Extension

71 1.1 Overview

72 Some CDMI systems allow jobs (such as deletion, changing metadata, scanning for viruses, etc.) to be performed
73 against CDMI objects. In such a system, multiple jobs may be performed simultaneously against the same or multiple
74 objects. In these systems, the client needs to be able to track the status of a job separately from the objects on which
75 the jobs act. Jobs may also be batched, and a method is needed to track the status for the batch job independently of
76 individual jobs that comprise the batch job.

77 This extension proposes a new type of data object to handle these requirements. The job data object (extended in a
78 similar manner as a query queue object) may be used to define, perform, and track job status independently from the
79 objects on which the job is acting.

80 1.2 Instructions to the Editor

81 To merge this extension into the CDMI 2.0.0 specification, make the following changes:

- 82 1. Insert into preamble/terms.txt, as follows:

83 **x.x**

84 **job** **|br|** a data object that defines and manages one or more job actions that may be performed against one or more
85 CDMI objects (job targets) **|br|**

86 **x.x**

87 **job action** **|br|** a specific change in state performed on a per CDMI object basis as a consequence of a job being run
88 against a CDMI object

89 Note: Examples include deletion, metadata changes, thumbnail creation, etc. **|br|**

90 **x.x**

91 **job container** **|br|** a CDMI container object that is capable of storing CDMI job objects **|br|**

92 **x.x**

93 **job state** **|br|** a value used to control the runtime state of a job

94 Note: Examples include start, stop, and cancel. **|br|**

95 **x.x**

96 **job target** **|br|** the set of CDMI objects against which a job performs actions **|br|**

- 97 2. Add an entry to the end of the table starting on line 135 of `cdmi_advanced/cdmi_capability_object.txt`, as follows:

Table 1: System-wide capabilities

Capability name	Type	Definition
cdmi_jobs	JSON string	If present and "true", the CDMI server supports job data objects.
cdmi_jobs_global_container	JSON string	If present and "true", contains the URI for the container for all job data objects in the CDMI server.

98 3. Add an entry to the end of the table starting on line 451 of cdmi_advanced/cdmi_capability_object.txt, as follows:

Table 2: Capabilities for data system metadata

Capability name	Type	Definition
cdmi_job_container_actions	JSON array of JSON strings	If present, lists the job action strings that may be requested for child job data objects created within a given container.

99 4. Add an entry to the end of the table starting on line 612 of cdmi_advanced/cdmi_capability_object.txt, as follows:

Table 3: Capabilities for data objects

Capability name	Type	Definition
cdmi_job_states	JSON array of JSON strings	If present, lists the job state strings that may be specified by a client.

100 5. Add an entry to the end of the table starting on line 662 of cdmi_advanced/cdmi_capability_object.txt, as follows:

Table 4: Capabilities for container objects

Capability name	Type	Definition
cdmi_create_job_container	JSON array of JSON strings	If present, indicates that the container allows the creation of job container objects and shall list the job action strings supported for child job containers.
cdmi_create_job_dataobject	JSON string	If present and "true", indicates that the container allows the creation of job data objects.

101 6. Add an entry to the end of the table starting on line 216 of cdmi_advanced/cdmi_metadata.txt, as follows:

Table 5: Data system metadata

Metadata name	Type	Description	Requirement
cdmi_job_container_↔ actions	JSON array of JSON strings	Contains a list of requested job actions to be permitted for job data objects created in the container. The job action strings that may be requested are indicated in the "cdmi_job_container_actions" capability of the parent container. If all supported actions are to be requested, the string "ALL" shall be used.	Optional

102 7. Add an entry to the end of the table starting on line 533 of cdmi_advanced/cdmi_metadata.txt, as follows:

Table 6: Provided values of data system metadata

Metadata name	Type	Description	Requirement
cdmi_job_container_↔ actions_provided	JSON array of JSON strings	Contains a list of job actions that are permitted for job data objects created in the container.	Optional

103 8. Create new clause, "cdmi_jobs.txt" after existing clause 25 "Data Object Versions", as follows.

104 Clause 2

105 Jobs

106 2.1 Job Management

107 A cloud storage system may optionally implement job management functionality. Job implementation is indicated by the
108 presence of the cloud storage system-wide capabilities for jobs and requires support for CDMI data objects.

109 Jobs allow arbitrary system-defined actions (such as deletion, metadata changes, thumbnail creation, virus scanning,
110 etc.) to be performed against one or more stored CDMI objects. In addition, multiple jobs may perform actions against
111 a single CDMI object. By creating a well-defined “job” object, clients may define jobs, specify which action is to be
112 performed, specify which objects the action is to be performed against, monitor the status, and control the operation of
113 the job in an interoperable and extensible manner.

114 In addition, multiple jobs may be batched together to apply actions sequentially for each target CDMI object. Such
115 a batch job may affect multiple objects, and each job may progress at a different rate. The client cares about the
116 overall status of its job, not the status on each object that the job affects. Tracking the job completion status in the
117 `completionStatus` and `percentComplete` fields of the data object as described in `clause %s` is not adequate for
118 such systems.

119 These problems are solved by tracking the job status in a separate CDMI job data object. The job data object provides
120 access to the completion status and percent complete of the job itself, along with other information required to define,
121 monitor, and control the job.

122 Jobs may be stored in container objects or may exist as standalone data objects with no parent container.

123 Cloud storage systems should consider implementing support for job data objects when the system supports the follow-
124 ing types of client-controlled activities:

- 125 • Server-side transformative operations: If the system allows a client to request that an operation be performed
126 against a CDMI data object, the user should initiate and manage the operation through the jobs interface.
- 127 • Batch jobs: When running batch jobs that include multiple individual actions, the user needs to track the status
128 for the jobs as the aggregate of the independent tasks.
- 129 • Multi-threading: If it is possible for multiple jobs to be performed on the same object simultaneously, the user
130 needs to track the status of each job independently.
- 131 • Long-running jobs: If jobs are run continuously, the user needs to be able to monitor and control the job.

2.2 Job Creation

When a client wishes to create a job data object, it may first check if the system is capable of providing job functionality by checking for the presence of the `cdmi_jobs` capability in the root container capabilities. If this capability is not present, creating a job data object shall be successful, but no job action shall be performed.

Jobs may be created by CDMI clients and CDMI server internal processes.

Examples of jobs created by CDMI clients may include:

- deleting data,
- updating metadata, and
- serialization.

Examples of jobs created by internal system processes may include:

- data migration,
- virus scans,
- search indexing, and
- periodic backups.

CDMI clients may create jobs through a variety of methods:

A client may create a job data object without specifying a location by performing a POST operation. In this case, the system shall create the job in a job container and return an HTTP response code of `202 Accepted`. The URI for newly created job object shall be returned in an HTTP `Location` response header.

A client may create a job data object at a specific location by performing a PUT operation. Only containers with a `cdmi_job_dataobject` capability shall allow job data objects to be created. The semantics for this are the same as other data objects.

A client may view and access jobs created by internal system processes through the job container. To get a list of system-created jobs, clients may list the children of the container.

2.3 Job Object Metadata

When a client creates a job data object, the presence of the metadata item `cdmi_job_state` indicates that the data object represents a job.

Metadata, including the `cdmi_job_state` metadata item may be changed by a client. If the `cdmi_job_state` metadata item is removed, that indicates that the job data object shall no longer manage jobs; instead, it shall be treated as a regular CDMI data object by the CDMI server.

The metadata items for a job data object are shown in [Table 7](#).

Table 7: Job data object metadata

Job Metadata Item	Type	Description	Requirement
<code>cdmi_job_state</code>	JSON string	Controls the desired runtime state of the job. Defined values are one of the following: <ul style="list-style-type: none"> • <code>Start</code> indicates that the job shall be transitioned to the <code>Processing</code> state. • <code>Pause</code> indicates that the job shall be transitioned to the <code>Idle</code> state. • <code>Cancel</code> indicates that the job shall be transitioned to the <code>Canceled</code> state. Only values specified in the <code>cdmi_job_states</code> capability shall be accepted by the CDMI server.	Mandatory

continues on next page

Table 7 – continued from previous page

Job Metadata Item	Type	Description	Requirement
cdmi_job_status	JSON string	A string that indicates the status of the job using one of the following values. <ul style="list-style-type: none"> <code>Pending</code> indicates that the job object has been created but has not yet started running. <code>Processing</code> indicates that the job is acting against the specified targets. <code>Idle</code> indicates that the job has completed acting against the specified targets and will resume if additional targets are specified. <code>Complete</code> indicates that the job has completed acting against the specified targets and will not resume. <code>Canceled</code> indicates that the job was canceled before it acted against all of the specified targets. A string that begins with "Error" indicates that an error prevented the job from acting against one or more of the specified targets. 	Mandatory
cdmi_job_ ↔ detailedStatus	JSON string	A message indicating what the job is currently doing or indicating the details about the error if it failed.	Optional
cdmi_job_ ↔ percentComplete	JSON string	The value shall be an integer numeric value from 0 through 100.	Optional
cdmi_job_startTime	JSON string	When present, this metadata item indicates the time when the job started in ISO-8601 format (see %s).	Optional
cdmi_job_endTime	JSON string	When present, this metadata item indicates the time when the job completed, was halted, or went into an error status in ISO-8601 format (see %s).	Optional

2.4 Job Object Value

162

163 When a client creates a job data object, the JSON fields described in Table 127 shall be provided as the value of the
164 data object.

165 The value of a job data object shall be immutable once created.

166 The value of a job data object are shown in Table 8.

Table 8: Job data object value

Job Value JSON item	Type	Description	Requirement
cdmi_job_action	JSON string	A system-defined identifier that indicates what action should be performed against each CDMI object that the job targets. Job actions defined as part of the CDMI specification (see 2.7) begin with the prefix <code>cdmi_job_action_</code> . Job actions defined by vendors should begin with a reverse DNS notation such as <code>org.snia.</code> to prevent namespace conflicts. Only job actions specified in the data system metadata items listed in <code>cdmi_job_container_actions_provided</code> of the parent container of the job data object shall be supported.	Mandatory

continues on next page

Table 8 – continued from previous page

Job Value JSON item	Type	Description	Requirement
cdmi_job_action_params	JSON object or JSON array	Contains job action-specific parameters that control how a job action behaves. .. raw:: latex vspace*{1ex} For example, a thumbnail action may take parameters that indicate the height and width and/or desired size, output format, etc.	Optional
cdmi_job_target	JSON array of JSON strings	Indicates against which CDMI objects the job action is performed. .. raw:: latex vspace*{1ex} Contains either an array of URIs to CDMI objects against which the job action shall be performed or a single URI to a CDMI queue. Each value enqueued in the queue is a URI to a CDMI object against which the job action shall be performed. For details on how queues are used with jobs, see FIXME.	Mandatory
cdmi_job_results	JSON string	Contains the URI to a CDMI queue that is used to indicate the results of performing a job. If present, the job shall enqueue a job-defined result value of performing the action against each job target.	Optional
cdmi_job_autodelete	JSON string	Contains the length of time in seconds the job data object shall be retained after the job status transitions to “Complete” or “Canceled”. If this field is not present, the job shall not be automatically deleted.	Optional
cdmi_job_scheduleTime	JSON string	The earliest time that the job shall run, specified in ISO-8601 format (see %s). The job shall be scheduled to run as soon as possible if this field is omitted or if the time specified is earlier than the current system time.	Optional

2.5 Examples

EXAMPLE 1: A CDMI job value that deletes three CDMI objects, then immediately deletes itself:

```
{
  "cdmi_job_action" : "cdmi_job_action_delete",
  "cdmi_job_target" : [
    "/cdmi_objectid/00007ED900100DA32EC94351F8970400",
    "/cdmi_objectid/00007ED90010F077F4EB1C99C87524CC",
    "/cdmi_objectid/00007ED90010512EB55A9304EAC5D4AA"
  ],
  "cdmi_job_autodelete" : "0"
}
```


EXAMPLE 2: A CDMI job value that deletes every object enqueued into a notification queue:

```
{
  "cdmi_job_action" : "cdmi_job_action_delete",
  "cdmi_job_target" : "/container/jobs/created_mp3_files_queue"
}
```

Jobs may be used in combination with query and notification queues to perform an action against each query result or notification result.

172 **2.6 Job Lifecycle**

173 The defined job status and transitions between status is shown in Fig. 1.

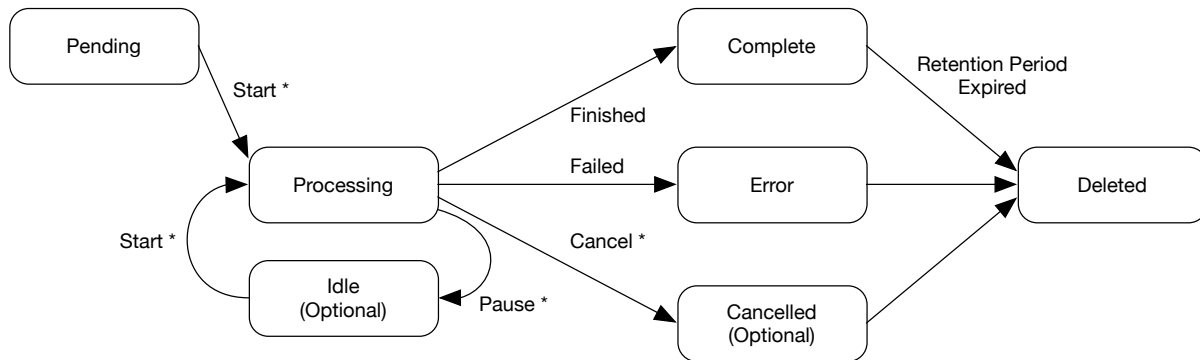

* Denotes states that can be controlled through the `cdmi_job_state` metadata item

Fig. 1: Job Lifecycle

174 The following status values will be reflected in the `cdmi_job_status` field of the job data object:

175 Pending, Active, Idle, Completed, Error, and Canceled.

176 The job is created in the Pending state. If it is started, it moves to the Active state. The job may optionally move
 177 between the Active and Idle states; however, all systems may not support the Idle state. The job moves to Com-
 178 pleted, Error, or Canceled once it is finished. The Canceled state is optional, as it may not make sense in some
 179 systems. After completion, the job is retained until the client deletes the job or until the `cdmi_job_autodelete` pe-
 180 riod elapses. The system shall permit the client to start, pause, restart, or cancel a job using the `cdmi_job_state`
 181 metadata item. This functionality is optional, as the ability to directly control a job depends on the system.

182 **2.7 Job Actions**

183 A client shall use the `cdmi_jobs_actions` system-wide capability to discover which job actions are supported.

184 Job actions defined in this international standard are shown in Table 9.

Table 9: Job actions

Job Action	Description
<code>cdmi_job_action_sequential_batch</code>	Sequential batch jobs perform two or more jobs one after another against each targeted CDMI object in a specified order. <ul style="list-style-type: none"> Sequential batch jobs have the job action identifier of <code>cdmi_job_action_batch_sequential</code>. The action parameters are an ordered JSON array of URIs to other job data objects that define the individual operations to be performed. Each of these component jobs shall not have a <code>job_target</code> or <code>job_state</code> , as the <code>job_target</code> and <code>job_state</code> of the sequential batch job shall be used instead.

continues on next page

Table 9 – continued from previous page

Job Action	Description
<code>cdmi_job_action_parallel_batch</code>	<p>Parallel batch jobs perform two or more individual jobs in any order or at the same time against each targeted CDMI object. Parallel batch jobs should only perform job actions that do not alter the target data objects, or unspecified results may occur.</p> <ul style="list-style-type: none"> Parallel batch jobs have the job action identifier of <code>cdmi_job_action_batch_parallel</code>. The action parameters are a JSON array of URIs to other job data objects that define the individual operations to be performed. <p>Each of these component jobs shall not have a <code>job_target</code> or <code>job_state</code>, as the <code>job_target</code> and <code>job_state</code> of the parallel batch job shall be used instead.</p>
<code>cdmi_job_action_delete</code>	<p>Deletion jobs delete the target CDMI objects.</p> <ul style="list-style-type: none"> Delete jobs have the job action identifier of <code>cdmi_job_action_delete</code>. No job action parameters are required.
<code>cdmi_job_action_update_metadata</code>	<p>Update metadata jobs manipulate the metadata of target CDMI objects.</p> <ul style="list-style-type: none"> Update metadata jobs have the job action identifier of <code>cdmi_job_action_update_metadata</code>. The action parameters are an JSON object that contain or more of the below three JSON containers: <ol style="list-style-type: none"> The <code>update_add</code> contains metadata items to be added to the data object if they don't already exist; The <code>update_modify</code> contains metadata items to be overwritten if they already exist; and The <code>update_delete</code> contains metadata items to be removed from the data object.

2.8 Job Containers

CDMI job container objects store job data objects. Use of job containers is optional in CDMI systems but is mandatory if clients are permitted to create job data objects.

Job containers may be dedicated to storing only job data objects, or they may store other containers and data objects, including job data objects. CDMI systems may automatically create job containers, and in such systems, CDMI clients may not have the ability to create or delete job containers. Other systems may allow CDMI clients to create or delete job containers that support storing job data objects that the system or CDMI clients create.

A CDMI system may create and implement a single, global jobs container that CDMI clients may not change. If present, clients locate this global jobs container by the URI specified by the `cdmi_jobs_global_container` capability described in %s.

Systems may allow multiple job containers. Jobs may be grouped in containers along with non-job data objects. One use of multiple containers is to group jobs by type. Systems may allow CDMI clients to create their own job containers.

When job containers are supported, a CDMI client shall identify job containers using the `cdmi_job_container_actions` data system metadata capability described in %s.

The ability of a CDMI client to create a job container object within a container is indicated by the `cdmi_create_job_container` container capability described in %s. This capability also indicates any restrictions on job actions for a created child job container.

Once a job container has been created, the data system metadata of the `cdmi_job_container_actions_provided` contains an array of JSON strings that indicate the allowable actions that may be requested for job data objects that are created within that job container (see %s). The system generates this list depending on which actions are supported and which actions are requested in the data system metadata of the `cdmi_job_container_actions` described in %s.

A system may allow jobs to be created or deleted within a job container. This function is indicated by the capabilities associated with the job container.

- 209 • The ability of a CDMI client to create a job data object within a job container is indicated by the
210 `cdmi_create_job_dataobject` container capability described in %s.
- 211 • The ability of a CDMI client to delete a job data object within a job container is indicated by the
212 `cdmi_delete_dataobject` data object capability described in %s.

213 Using capabilities and data system metadata, the client follows these steps to create a new job container that allows
214 jobs for deleting CDMI objects:

- 215 1. Examine the presence and value of the `cdmi_create_job_container` capability of the parent container to
216 see if child job containers may be created and if the `cdmi_job_action_delete` action is supported.
- 217 2. If job container creation is supported and the `cdmi_job_action_delete` action is supported, create a new
218 child container with the `cdmi_job_container_actions` data system metadata set to ALL (or include the value
219 `cdmi_job_action_delete`) to indicate to the server that job data objects with delete job actions will be created
220 in this newly created container.
- 221 3. Examine the `cdmi_job_container_actions_provided` data system metadata of the newly created con-
222 tainer to ensure that `cdmi_job_action_delete` is included in the list.
- 223 4. Examine the `cdmi_create_job_dataobject` capability of the newly created container to ensure that job cre-
224 ation is supported.
- 225 5. If job data object creation is supported and the desired action is supported, create a new child data object with
226 `cdmi_jobs_action` metadata supporting the `cdmi_job_action_delete` job action.

227 **EXAMPLE 3:** An example of the job metadata associated with a job container that indicates that only delete action jobs
228 may be created is as follows:

```
{
  "metadata" : {
    "cdmi_job_container_actions" : [ "ALL" ],
    "cdmi_job_container_actions_provided" : [ "cdmi_job_action_delete" ]
  }
}
```